

A NEW LEVEL OF

WINDOW



OUR マニロ ロ レ ヘマ **FINISHES** Ash Grey Senses Metallic Schuco Grey We focus on precision and detail to deliver high-performance windows that are both functional and beautifully crafted for homes and businesses. Earth Metallic Diamond Grey Charcoal Black Ocean White PZEMIUM w - -Gun Metal Rusty Antique Black Panther Mango Teak Mahagany

Maple

Walnut


Ebony

Light Champagne

Dark Champagne

Silver Soft Grey

Polo Blue

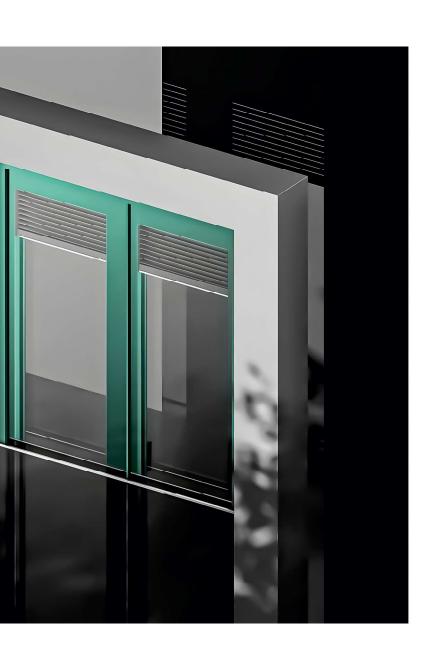

PREFERRED GLASS SOLUTIONS













- GLAZING 5 TO 20 mm
 MAX WIDTH OF SHUTTER 1500 mm
- MAX HEIGHT 2400 mm
- ROLLER STAINLESS STEEL & NYLON
 STAINLESS STEEL RAIL

- SINGLE & MULTI POINT LOCKING
- MALE-FEMALE INTERLOCKING

ATTRIBUTES

- 2 TRACK OUTER WIDTH 3 TRACK OUTER WIDTH
- SIDE FRAME HEIGHT
- TOP/BOTTOM FRAME HEIGHT
 - 45 mm 20 mm

123 mm

20 mm
























A NEW LEVEL OF WINDOWS

ENGINEERING EXCELLENCE

90° Fittings: All the fittings of the section are done at 90° to avoid expansion and Contraction of Aluminium.

Roller Bearing: High-quality roller bearing for a zero-effort sliding experience.

Conceal Provision: A shutter guide is provided in the bottom frame, which helps to conceal the whole system for less view.

Male - Female Interlocking: Preces of the interlock lock together in their V-shaped grooves, eliminating the rattling sound caused by wind & making the interlock air, water, & dost-proof.

Drainage system: A water drainage system is provided.









- GLAZING 8 TO 28mm
- MAX WIDTH OF SHUTTER 1500mm
- MAX HEIGHT 3600mm
- STAINLESS STEEL ROLLER AND RAIL
 90* FITMENTS

- MULTI POINT LOCKING
- MALE-FEMALE INTERLOCKING

ATTRIBUTES

- 2 TRACK OUTER WIDTH 3 TRACK OUTER WIDTH
- SIDE FRAME HEIGHT
- TOP/BOTTOM FRAME HEIGHT 45 mm 24 mm

110 mm 161 mm

• INTERLOCK















3 TRACK





A NEW LEVEL OF WINDOWS

ENGINEERING EXCELLENCE

场

90° Fittings: All the fittings of the section are done at 90° to avoid expansion and Contraction of Aluminium.

Roller Bearing: High-quality roller bearing for a zero-effort sliding experience.

Conceal Provision: A shutter guide is provided in the bottom frame, which helps to conceal the whole system for less view.

Male - Female Interlocking: Preces of the interlock lock together in their V-shaped grooves, eliminating the rattling sound caused by wind & making the interlock air, water, & dost-proof.

Drainage system: A water drainage system is provided.









- GLAZING 8 TO 28 mm
- MAX WIDTH OF SHUTTER 1800 mm
- MAX HEIGHT 6000 mm
- STAINLESS STEEL ROLLER AND RAIL
 90* FITMENTS
- MULTI POINT LOCKING
- MALE-FEMALE INTERLOCKING

ATTRIBUTES

 2 TRACK OUTER WIDTH 110 mm 161 mm 3 TRACK OUTER WIDTH

 SIDE FRAME HEIGHT TOP/BOTTOM FRAME HEIGHT 45 mm INTERLOCK 24 mm














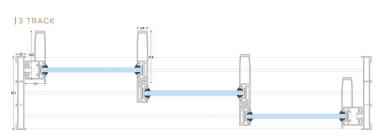



A NEW LEVEL OF WINDOWS

ENGINEERING EXCELLENCE


90° Fittings: All the fittings of the section are done at 90° to avoid expansion and Contraction of Aluminium.

Roller Bearing: High-quality roller bearing for a zero-effort sliding experience.

Conceal Provision:
A shutter guide is provided in the bottom frame, which helps to conceal the whole system for less view.

Male - Female Interlocking:
Pieces of the interlock lock together in their
V-shaped grooves, eliminating the rattling sound
caused by wind & making the interlock air, water,
& dost-proof.

Drainage system:
A water drainage system is provided.









- GLAZING 12 TO 15mm & 24 TO 32mm
 MAX WIDTH OF SHUTTER 2000mm
- MAX HEIGHT 3000mm
- STAINLESS STEEL ROLLER AND RAIL
 90* FITMENTS

- MULTI POINT LOCKING
- MALE-FEMALE INTERLOCKING

ATTRIBUTES

- 2 TRACK OUTER WIDTH
 SIDE FRAME HEIGHT
 - 108 mm 42 mm
- TOP/BOTTOM FRAME HEIGHT
- INTERLOCK
- 46 mm 17 mm

















90° Fittings: All the fittings of the section are done at 90° to avoid expansion and Contraction of Aluminium.


Roller Bearing: High-quality roller bearing for a zero-effort sliding experience.


Conceal Provision: A shutter guide is provided in the bottom frame, which helps to conceal the whole system for less view.

Male - Female Interlocking: Preces of the interlock lock together in their V-shaped grooves, eliminating the rattling sound caused by wind & making the interlock air, water, & dost-proof.

Drainage system:A water drainage system is provided.

WWW.THEVARCAS.COM



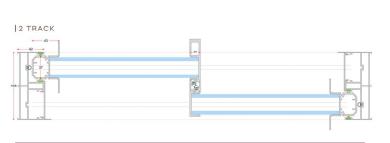

VARCAS

A NEW LEVEL OF WINDOWS







- GLAZING 5 TO 18mm
 MAX WIDTH OF SHUTTER 750mm
- MAX HEIGHT 1800mm
- 45* FITMENTS
 SINGLE & MULTI POINT LOCKING

ATTRIBUTES

- FRAME WIDTH
- FRAME HEIGHT



38 mm 54 mm 52 mm















A NEW LEVEL OF WINDOWS

ENGINEERING EXCELLENCE

High Quality hinges: High quality hinges are bulted and designed to last and can withstand the constant movem -ent stress that windows endure during opening & closing, which ensures that your window opens smoothly.

Multipoint Locking: Multiple locking method is used for secured and sturdy locking.

Rubber Gasket:
Specially designed & crafted rubber gaskets for an extra cushioning effect which prevent the shutter rattling or vibrations in the trame, especially in windy weather.









- GLAZING 5 TO 24mm
 MAX WIDTH OF SHUTTER 1200mm
- MAX HEIGHT 3000mm
- 45* FITMENTS
- SINGLE & MULTI POINT LOCKING

ATTRIBUTES

- 50 mm 47 mm / 73 mm FRAME WIDTH
- FRAME HEIGHT MULLION
 WINDOW SHUTTER 66 mm 79 mm
- DOOR SHUTTER














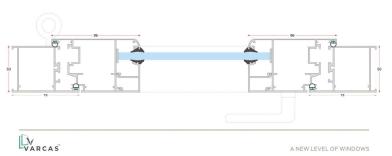

A NEW LEVEL OF WINDOWS

ENGINEERING EXCELLENCE

High Quality hinges: High quality hinges are bulted and designed to last and can withstand the constant movem -ent stress that windows endure during opening & closing, which ensures that your window opens smoothly.

Multipoint Locking: Multiple locking method is used for secured and sturdy locking.

Rubber Gasket: Specially designed & crafted rubber gaskets for an extra cushioning effect which prevent the shutter ratiling or vibrations in the trame, especially in windy weather.









- GLAZING 5 TO 8mm
 MAX WIDTH OF SHUTTER 1200mm
- MAX HEIGHT 3000mm
- 45* FITMENTS
- SINGLE & MULTI POINT LOCKING

ATTRIBUTES

- FRAME WIDTH FRAME HEIGHT 42 mm
- MULLION
 DOOR SHUTTER 66 mm 85 mm














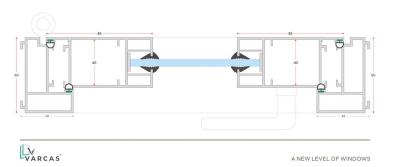

High Quality hinges: High quality hinges are bulted and designed to last and can withstand the constant movem -ent stress that windows endure during opening & closing, which ensures that your window opens smoothly.

ENGINEERING EXCELLENCE

Multipoint Locking: Multiple locking method is used for secured and sturdy locking.

Rubber Gasket: Specially designed & crafted rubber gaskets for an extra cushioning effect which prevent the shutter rattling or vibrations in the trame, especially in windy weather.





- GLAZING 8 TO 35 mm DGU
- MAX WIDTH OF SHUTTER 900 mm
 MAX HEIGHT 3300 mm
- 45* FITMENTS
- MULTI POINT LOCKING
- ANTI FINGER TRAPPING GASKET
 IN OR OUT OPENING











ATTRIBUTES

 FRAME WIDTH FRAME HEIGHT
 SHUTTER
 TYPICAL SIGHT LINE




70 mm 50 mm 60 mm

128 mm










A NEW LEVEL OF WINDOWS







ISHAAN EMPIRE

Shivam Industrial Zone-2, Kalavad Road, Chhapra Rajkot - 360021, Gujarat-India.

Contact Us: +91 97276 90432 Email: varcaswindows@gmai.com

FaceBook: varcas Window Instagram: @varcas_windows