



ONE STOP SOLUTION FOR GLASS PROCESSING

www.hyindia.com

ONE STOP SOLUTION FOR GLASS PROCESSING

IG GLASS

GLASS STRAIGHT-LINE EDGING MACHINE



FEATURES

- 9 motors straight-edge machine is suitable for the polishing of straight and bottom edges of glass of different size and thicknesses
- The front chamfering polishing motors advanced structure, high accuracy and easy operation.
- The same thickness can be processed continuously and other advantages.

Technical Parameters

MODEL	HN-9325
INPUT VOLTAGE	380V 50Hz
TOTAL POWER	19.5Kw
MIN. GLASS SIZE	80 x 80mm
MAX. GLASS SIZE	3000 x 3000mm
GLASS THICKNESS	3~25mm
GLASS TRANSMISSION SPEED	0.7~7m/min
BENCH HEIGHT	750mm
OVERALL DIMENSION	6800 x 1000 x 2500mm


GLASS STRAIGHT LINE BEVELING MACHINE

Technical Parameters

MODEL	HNB-261
INPUT VOLTAGE	380V 50Hz
TOTAL POWER	21Kw
BEVEL ANGLE	3°~25°
MIN.GLASS SIZE	80x80mm
MAX. GLASS SIZE	3000 x3000mm
GLASS THICKNESS	3~25mm
GLASS TRANSMISSION SPEED	0.7~3.5m/min
BENCH HEIGHT	750mm
OVERALL DIMENSION	7000 x1200x2500mm

FEATURES

- With coarse grinding, fine-grinding, polishing and chamfering in one time.
- It's 9 grinding heads have a powerful function to eliminates lines of glass, which can strongly improve the polishing brightness of glass.
- The base, front and rear beans, beds and grinding heads are of casting material, which can bear large loads and has stable performance

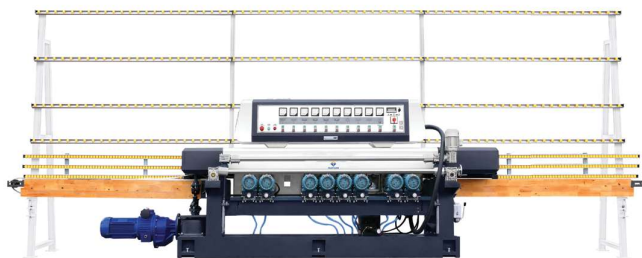

GLASS SPECIAL SHAPE GRINDING MACHINE



FEATURES

- Used for grinding and polishing round, oval and special-shaped glass of edges, duck beak edges and inclined edges etc.

Technical Parameters

MODEL	HN-1320NW
INPUT VOLTAGE	380V 50Hz
TOTAL POWER	3.0Kw
GLASS THICKNESS	3~25mm
BEVEL ANGLE	0~15°
TRANSMISSION SPEED	0.5~2.5m/min
SWING DIAMETER	130~2100mm
OVERALL DIMENSION	1100x1300x1600mm

GLASS SPECIAL SHAPE GRINDING MACHINE

Technical Parameters

MODEL	HN-1320N
INPUT VOLTAGE	380V 50Hz
TOTAL POWER	3.0Kw
GLASS THICKNESS	3~25mm
BEVEL ANGLE	0~15°
TRANSMISSION SPEED	0.5~2.5m/min
SWING DIAMETER	130~2100mm
OVERALL DIMENSION	1100x1300x1600mm

FEATURES

- Used for grinding and polishing round, oval and special-shaped glass of edges, duck beak edges and inclined edges etc.



DIAMOND WHEEL GLASS POLISHING MACHINE



Technical Parameters

MODEL	EM150
INPUT VOLTAGE	380V 50Hz
POWER	0.75Kw*2
MAX.GLASS SIZE	1600*1600mm
MIN.GLASS SIZE	300*300mm
GLASS THICKNESS	4-12mm
WHEEL TYPE	D150*d20*T20 mm-180P
OVERALL DIMENSION	2200*1550*1200mm

SAND BELT GLASS POLISHING MACHINE

Technical Parameters

MODEL	EM80-WET
INPUT VOLTAGE	380V 50Hz
POWER	2*1.5Kw
GLASS THICKNESS	1.5mm-19mm
MAX.GLASS SIZE	1500*1500mm
MIN.GLASS SIZE	260*260mm
SAND BELT SPEED	15m/s
SAND BELT SPECIFICATION	L2000*W80mm*100P
OVERALL DIMENSION	2200*1160*1350mm



GLASS STRAIGHT LINE DOUBLE EDGER WITH 20 MOTORS



FEATURES

- It can process glass Min. size 160*160mm and max size 4200*4200mm

Technical Parameters

MODEL	SN20
INPUT VOLTAGE	380V 50Hz
TOTAL POWER	44Kw
GLASS THICKNESS	3-19mm
COMPRESSED AIR INPUT (MPA)	0.6-0.8Mpa
TRANSMISSION SPEED (M/MIN)	0.5-6.5m/min
CHAMFER WIDTH (MM)	≤ 1.5mm
CHAMFER TOLERANCE (MM)	±0.2mm/m
PARALLEL TOLERANCE OF PROCESSING GLASS (MM)	±0.2mm/m
DIAGONAL TOLERANCE OF PROCESSING GLASS (MM)	±0.5mm/m

GLASS DRILLING MACHINE

Technical Parameters

MODEL	HN-0896ZK
INPUT VOLTAGE	380V 50Hz
TOTAL POWER	2.5Kw
GLASS THICKNESS	3-25mm
TABLE SIZE	2200 x2700mm
DIA. OF DRILLING HOLES	D3-200mm
OVERALL DIMENSION	2200x2700x1700mm



CNC GLASS PROCESSING MACHINE



Technical Parameters

MODEL	GP-0825
INPUT VOLTAGE	380V 50Hz
POWER	13.6Kw
SPINDLE	7.5 Kw Water cooling
SPINDLE SPEED	24000r/min
GLASS THICKNESS	3~25mm
PRECISION	+0.5mm
FEEDING SPEED	0-1m/min
STROKE:(X,Y,Z)	800*2500*200mm

HORIZONTAL GLASS WASHING MACHINE

Technical Parameters

MODEL	JYX-2500B
INPUT VOLTAGE	380V 50Hz
TOTAL POWER	28KW
MAX. GLASS WIDTH	2500mm
MIN. GLASS SIZE	400mm×400mm
GLASS THICKNESS	3mm-25mm
SPEED	1-12m/min
HEIGHT	(880) mm
OVERALL DIMENSION	5500×3500×2840mm



VERTICAL SANDBLASTING MACHINE



Technical Parameters

MODEL	SN-V2000
INPUT VOLTAGE	380V 50Hz
TOTAL POWER	3.5Kw
HEIGHT OF CONVEYOR	480mm
MAX HEIGHT OF GLASS	2000mm
AUTOMATIC GUN	3 pcs
AIR COMPRESSOR	15kw-22kw 3.6m ³
PRESSURE	0.6MPa-0.8Mpa
AIR SOURCE OF EXTERIOR	Air output: over 3m ³ /min (it needs storage tank and compress air cleaner to match)
OVERALL DIMENSION	6800×1500×2800mm


HORIZONTAL SANDBLASTING MACHINE

Technical Parameters

MODEL	SN-H2000
INPUT VOLTAGE	380V 50Hz
TOTAL POWER	7.1Kw
MIN.SIZE GLASS	200*200mm
MAX.GLASS WIDTH	2000mm
GLASS THICKNESS	3-25mm
SANDING SPEED	400-1100 mm/min
SAND ROTATING BLADE	8pcs
OVERALL DIMENSION	3500×2900×2000mm



GLASS LIFT ROBOT

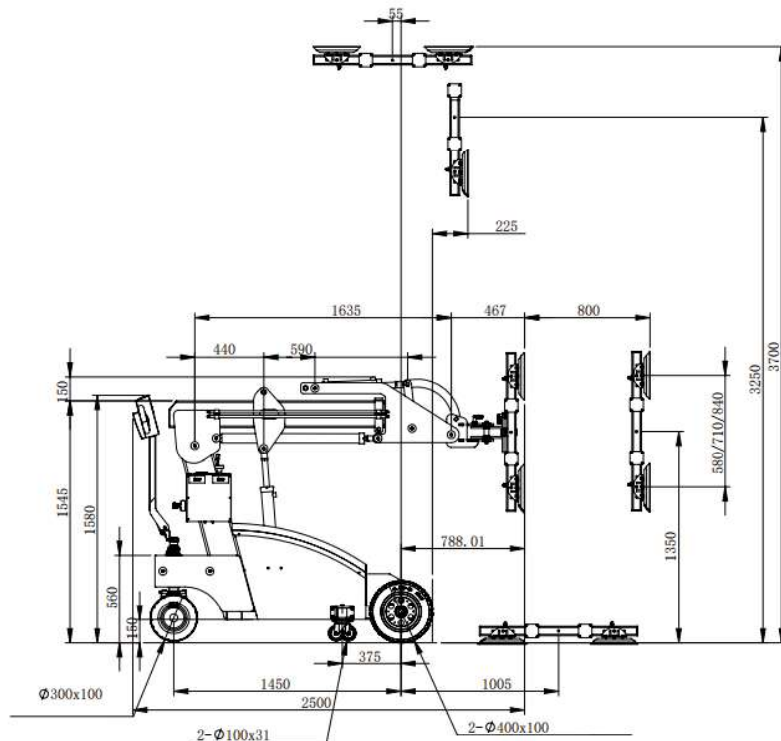

FEATURES

- Mainly used for handing,moving and installing glass ,marbel ,wooden panel etc.

MODEL	GL-LD-200	GL-LD-300	GL-LD-400	GL-LD-500	GL-LD-600	GL-LD-800
LOAD CAPACITY(KG)	200Kg(retract) 100Kg(extend)	300Kg(retract) 150Kg(extend)	400Kg(retract) 200Kg(extend)	500Kg(retract) 250Kg(extend)	600Kg(retract) 300Kg(extend)	800Kg(retract) 400Kg(extend)
LIFTING HEIGHT(MM)	2700mm	3600mm	3600mm	3700mm	3700mm	5000mm
QTY OF SUCTION CAP	4pcs	4pcs	4pcs	6pcs	6pcs	8pcs
DIAMETER OF RUBBER SUCTION CAP	Φ250mm	Φ300mm	Φ300mm	Φ300mm	Φ300mm	Φ300mm
MAINTENANCE-FREE BATTERY	2x12V/35AH	2x12V/80AH	2x12V/100AH	2x12V/120AH	2x12V/120AH	2x12V/120AH
BATTERY CHARGER	Smart Charger					
DRIVER MOTOR	24V /750W			24V/1200W		
LIFTING MOTOR	24V/1500W/10L		24V/2000W/10L		24V/2000W/12L	
CHASSIS L*W(MM)	2350x620mm	2660x810mm	2660x810mm	2800x810mm	2800x810mm	2800x810mm
DRIVING WHEEL(MM)	Φ210x70mm	Φ250x80mm	Φ250x80mm	Φ300x100mm	Φ300x100mm	Φ300x125mm
N.W/G.W(KG)	600/700Kg	1100/1150Kg	1280/1330Kg	1300/1350Kg	1400/1450Kg	1600/1650Kg
PACKING SIZE(MM)	2350x620x1700	2560x1030x1700	2560x1030x1700	2580x1050x1700	2580x1050x1700	3000x1250x2300
MOVEMENT	Automatic (4kinds)	Pad frame vertical up /down 180 °automatic ; Boom in /out telescopic automatic ; Powered arm up/down automatic ; Lateral side shift 100mm automatic ;				
	Manual (4kinds)	Pad frame tilt left/right 90 °manual ; Pad frame rotation 360°manual ;				