




TLS 90 FLAT

Door System

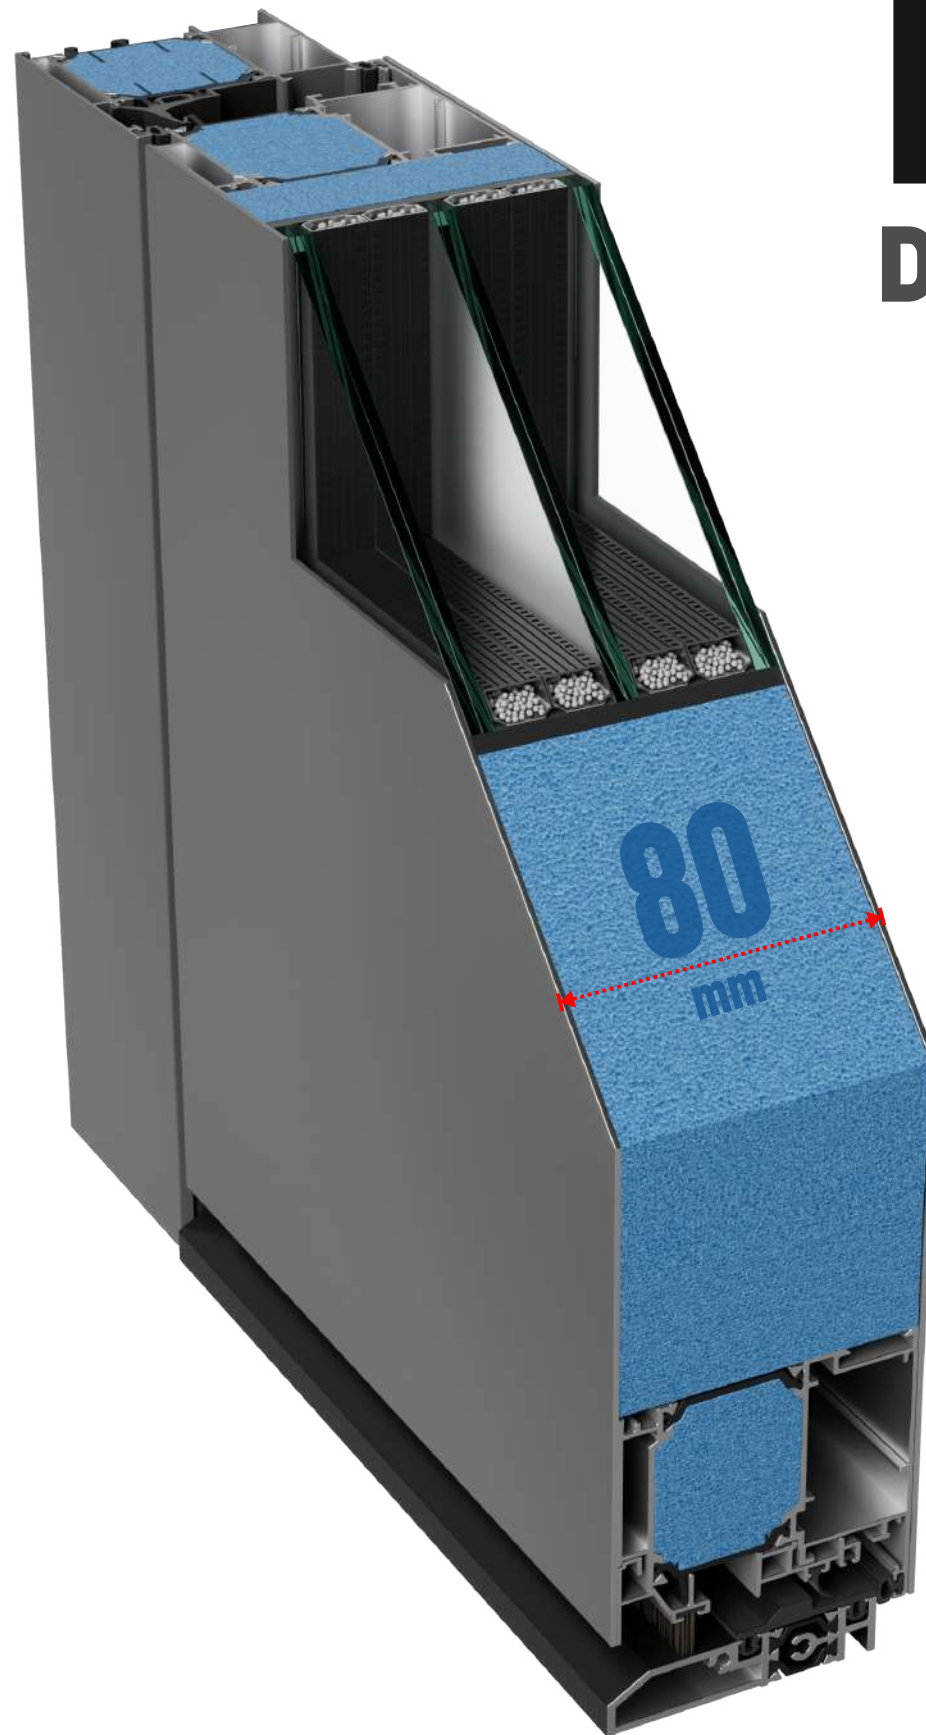

Burglar resistance



Rc3 Upgrade KIT




Rc2

Thermal Transmittance



up to
0,82 W/(m².K)

Air permeability



Class 4

Resistance to wind load




Class C3/B3

Watertightness



Class 3A

Sound reduction



up to
36 dB



TLS 90 FLUSH

Door System



Burglar resistance



Rc3 Upgrade KIT




Rc2

Thermal Transmittance



up to
0,82 W/(m².K)

Air permeability



Class 4

Resistance to wind load




Class C3/B3

Watertightness



Class 3A


Sound reduction



up to
36 dB



**TOTAL
SUPPORT**

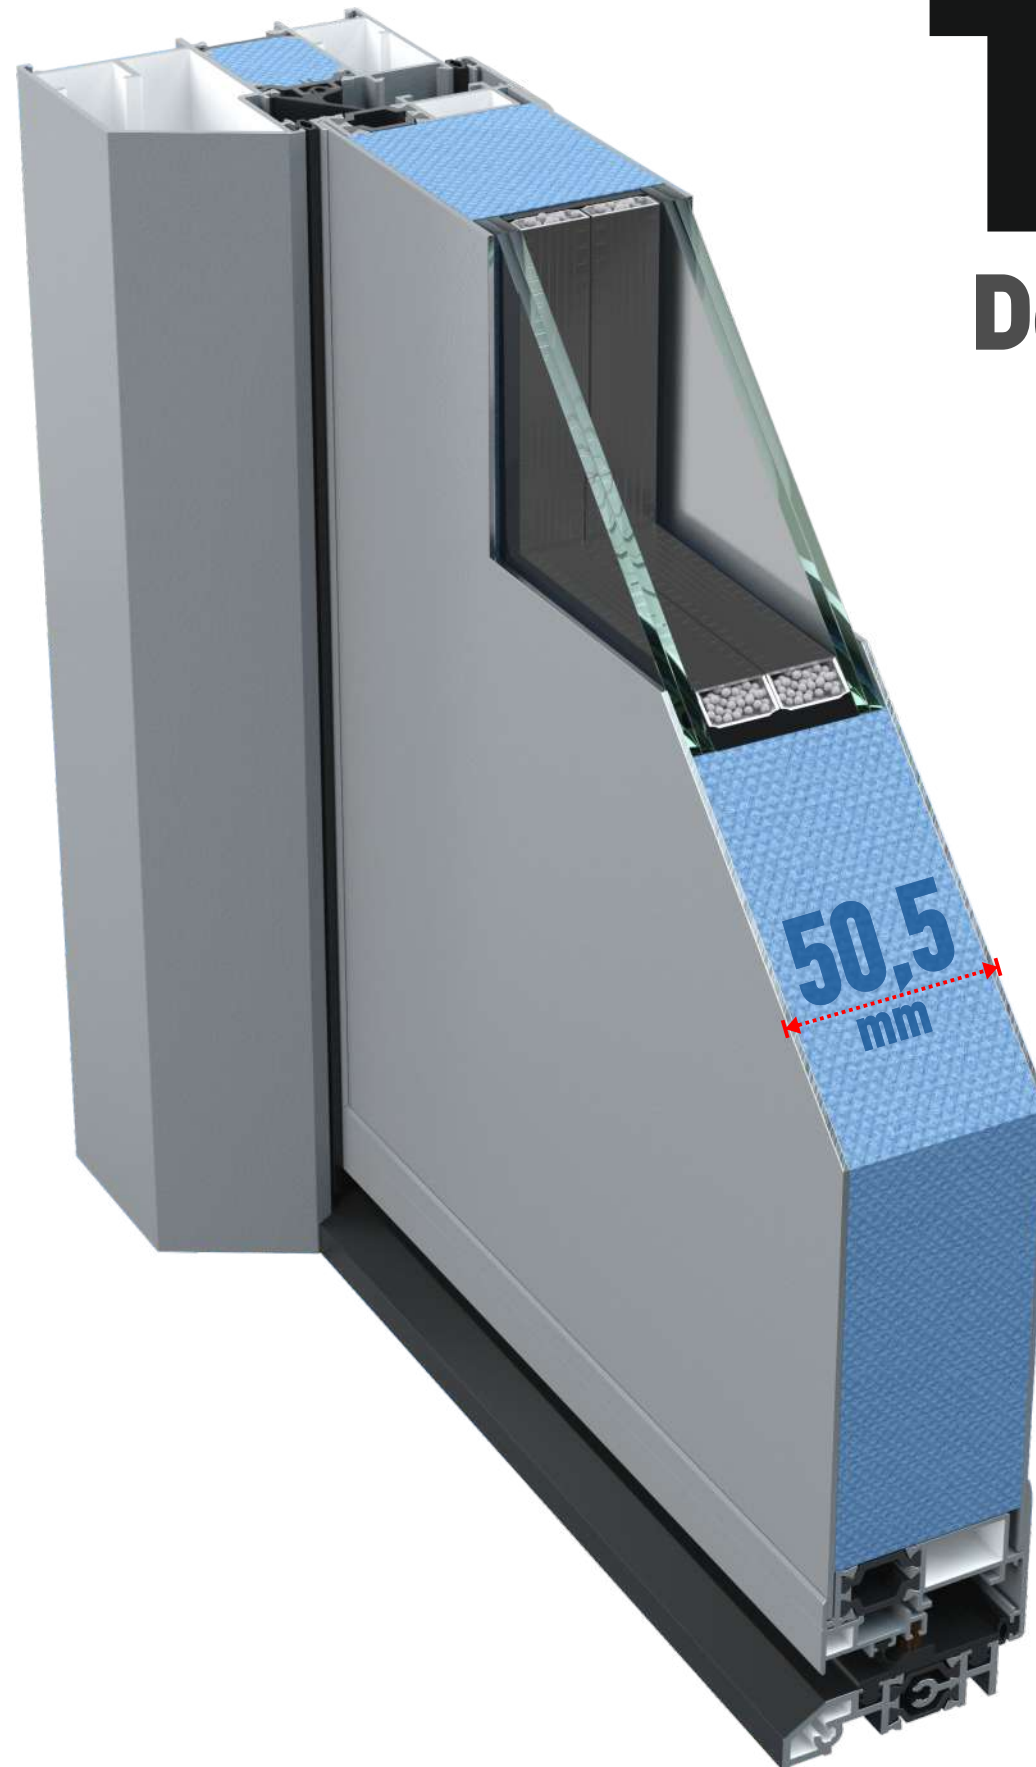

TLS 50 **EXPAND**

Door System



Burglar resistance



Rc1

Thermal Transmittance



up to

1,4 W/(m².K)

Air permeability



Class 2

Resistance to wind load




Class C3/B3

Watertightness



Class 1A

Sound reduction




up to

29 dB



**TOTAL
SUPPORT**

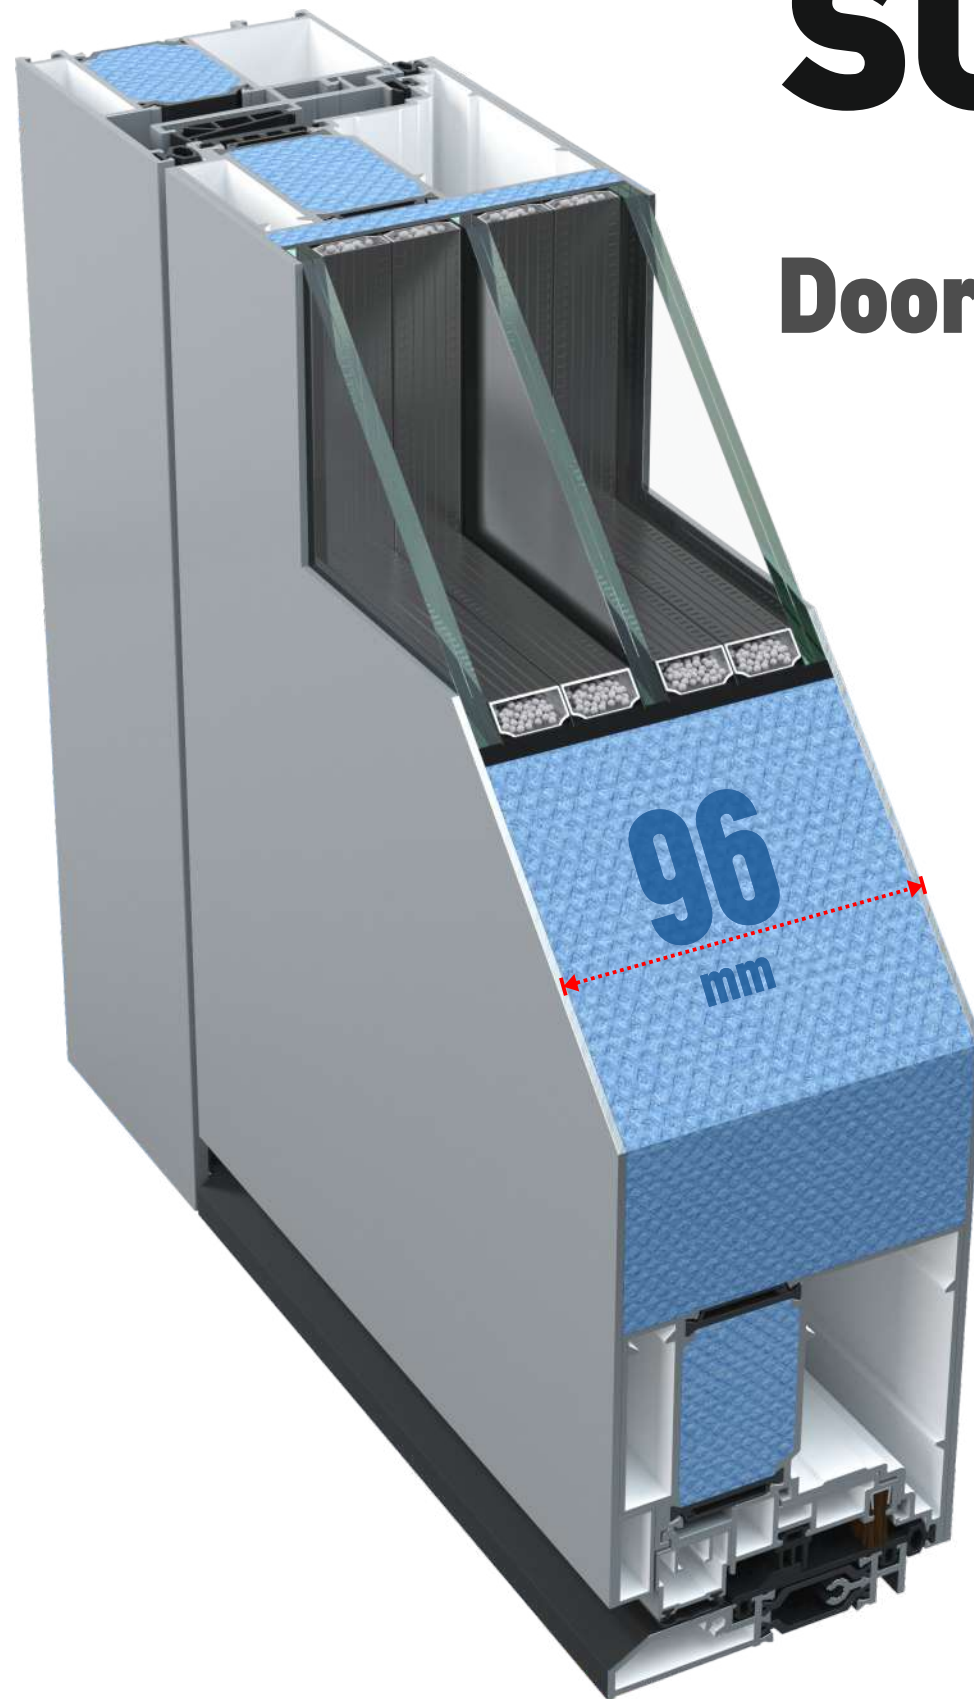

SUPERIOR **FLAT** Platinum Door System



Burglar resistance



Rc2


Thermal Transmittance



up to

0,88 W/(m².K)

Air permeability



Class 3

Resistance to wind load




Class C4/B4

Watertightness



Class 3A

Sound reduction




up to

36 dB



**TOTAL
SUPPORT**

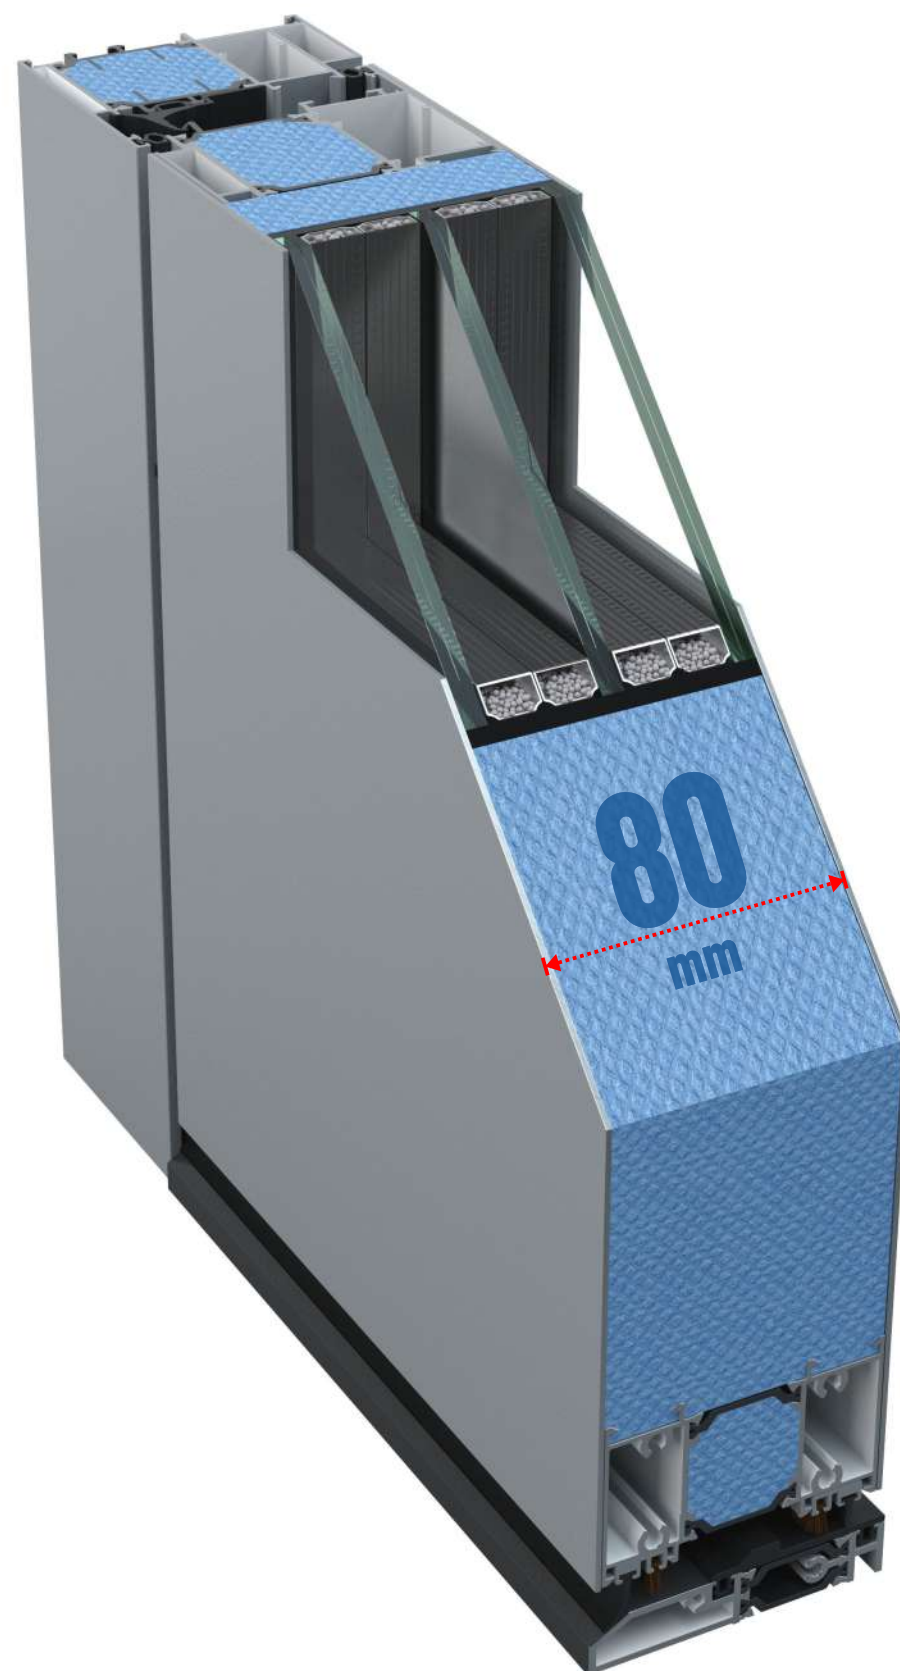

PIVOT

Solution

Door System



Burglar resistance



Rc3

Thermal Transmittance



**up to
0,76** W/(m².K)

Air permeability



Class 3

Resistance to wind load




Class C3

Watertightness



Class 1A

Sound reduction



31 dB



MAX 3 Triple - Triplex Glazed
Triple Insulation
Triple Security
TEHNI triple/triplex glazing system



ISO MAX
Profile insulation to the MAX



**TOTAL
SUPPORT**



PIVOT

Superior

Door System



Burglar resistance



Rc3

Thermal Transmittance



**up to
0,76** W/(m².K)

Air permeability



Class 3

Resistance to wind load



Class C3/B3

Watertightness



Class 1A



MAX 3 Triple - Triplex Glazed
Triple Insulation
Triple Security
TEHNI triple/triplex glazing system



ISO MAX
Profile insulation to the MAX



**TOTAL
SUPPORT**



PIVOT

Superior

Door System **Hybrid**



Air permeability



Class 3

Resistance to wind load



Class C3/B3

Watertightness



Class 1A

ISTEDIL


a Ismes brand



ISO MAX
Profile insulation to the MAX



**TOTAL
SUPPORT**

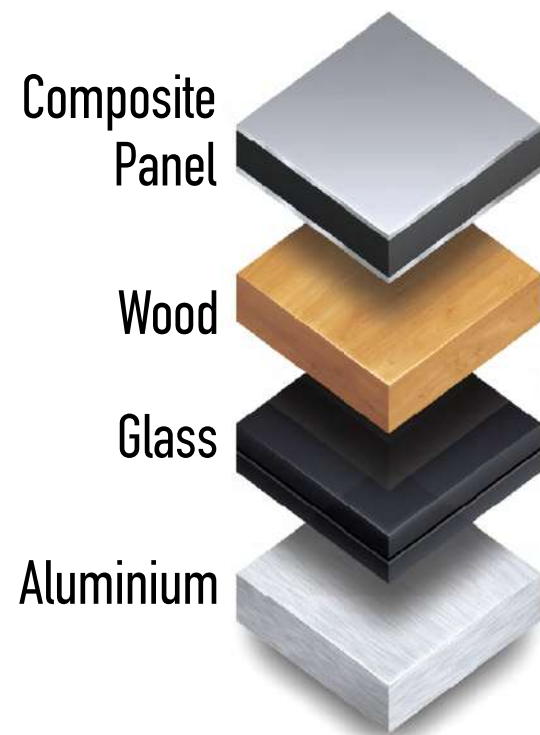

Security Multiframe Door System



Burglar resistance



Rc3

Thermal Transmittance



**up to
1,0** W/(m².K)

Air permeability



Class 1

Resistance to wind load




Class C3

Watertightness



Class 2A

Sound reduction



**up to
35 dB**