


LIPI WINDOW- DOOR MACHINERY



UPVC and Aluminium Window-Door Processing Machinery

Double Head Cutting Saw (with digital display)- LJZ2-450X3700

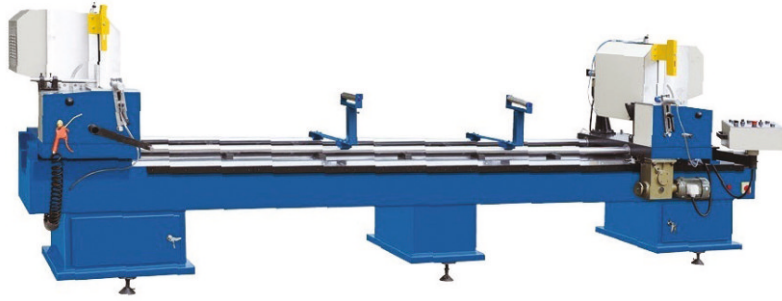

Specification:

- Input Power: 3.55Kw
- Power Supply: 380V/50Hz
- Working Pressure: 0.5 ~ 0.8MPa
- Air Consumption: 100L/min
- Motor Rotary Speed: 2800r/min
- Cutting Angle: -45° ~ 90° ~ 45°
- Saw Blade Specification: Φ450 x Φ30
- Cutting Width x Height: 120 x 160mm
- Cutting Length: 680 – 3700mm
- Overall Dimension: 4600 x 1300 x 1550mm
- Weight About: 980kg

Features:

- The machine is used for cutting of UPVC and Aluminium profiles.
- The Saw heads can be manually changed to -45°, 90° and +45° angle.
- Micro Cutting Length Adjustment Digital Device ensures precision and easy operation.
- Imported carbide blade for accurate cutting with high endurance.
- The two heads can work independently and also work simultaneously.
- To cut out a section of desired length and for the accuracy of end angles.
- The lathe carriage is moved by a precision linear bearing pair which guarantees the repetitive positioning.
- The movable head is moved by a stepper motor with digital display.

V Cutting Saw – SVJ- 60



Specification:

- Input Power: 1.5Kw
- Power Supply: 380V/50Hz
- Working Pressure: 0.4 - 0.6MPa
- Air Consumption: 80L/min
- Motor Rotary Speed: 2800r/min
- Cutting Width: 120mm
- Cutting Length: 300 – 1600mm
- Depth Cutting: 20 – 60mm
- Overall Dimension: 1900 x 700 x 1350mm
- Weight: 210kg

Features:

- For cutting 90° V-shape groove.
- Automatic centralized positioning device makes the operation easier.
- Pneumatic drive facilitates the operation.
- Adjustable feeding speed and high cutting precision.

Glazing Bead Saw – SYJW- 1800



Specification:

- Input Power: 1.5Kw
- Power Supply: 380V/50Hz
- Working Pressure: 0.4 - 0.6MPa
- Air Consumption: 80L/min
- Motor Rotary Speed: 2800r/min
- Cutting Width: 120mm
- Cutting Height: 29mm
- Cutting Range: 320 – 1800mm
- Overall Dimension: 1900 x 700 x 1350mm
- Weight: 250kg

Features:

- For cutting glazing bead at 45° angle.
- The machine is capable of cutting two beads at the same time.
- Vertical clamping device and specially designed cutting ensures stable positioning.
- User friendly measuring rod

Mullion Cutting Saw – SVJ- 65



Specification:

- Input Power: 1.5Kw
- Power Supply: 380V/50Hz
- Working Pressure: 0.4 - 0.6MPa
- Air Consumption: 80L/min
- Motor Rotary Speed: 2800r/min
- Cutting Width: 120mm
- Cutting Range: 320 – 1600mm
- Overall Dimension: 1900 x 700 x 1350mm
- Weight: 210kg

Features:

- This machine is used for mullion cutting.
- Advanced technology with pneumatic clamping prevents collapse during cutting process.
- Two cutting blades are in the space of 90° layout, a clamp is installed at the same time to complete two v-shape cutting head, with high cutting precision and high productivity.
- Horizontal structure for high cutting precision.

Lock Hole Milling Machine – LZ3F – 290



Specification:

- Input Power: 2.25Kw
- Power Supply: 380V/50Hz
- Working Pressure: 0.6 - 0.8MPa
- Diameter Of The Three – Hole Drilling Head : Φ 12mm
- Distance Of The Three – Hole Drilling Head : 21.5 x 21.5mm
- Milling Cutter Diameter: Φ 5, Φ 8mm
- Copy Routing Range: 290 x 100mm
- Overall Dimension: 1000 x 1130 x 1600mm
- Weight About: 250kg

Features:

- Used for copy-routing processing various kinds of holes, grooves on UPVC profiles.
- Copy routing 1:1 ratio for easy transfer of the routing pattern from a template to the profile. Pneumatic horizontal clamping.
- Length and width of the shape can be adjusted through the turret on the machinery.
- Using a foot switch control for cylinder operation.
- Compact Structure.

Auto Water Slot – SCX01/02/03



Specification:

- Input Power: 0.38Kw x 2/3/4
- Power Supply: 220V/50Hz
- Air Pressure: 0.5 ~ 0.8MPa
- Motor Rotary Speed: 2500r/min
- Air Consumption: 30L/min
- Milling Cutter Diameter: Φ 4, Φ 5mm
- Slot depth: 30mm
- Slot length:30-60mm
- Overall Dimension: 2100 x 860 x 1500mm
- Weight: 140kg

Features:

- Three independent routing units for automatic routing and drilling of water slots and ventilation hole on UPVC profile.
- Compact built router units with automatic feed for routing depth and slot length.
- Three motors can be adjustable easily for milling different angle position.
- Router can be controlled individually for various productions.
- Auto moving work table ensure accurate milling.
- Easily adjustable to realize symmetrical milling.

End Milling Machine – LXD-200



Specification:

- Input Power: 2.2Kw
- Power Supply: 380V/50Hz
- Working Pressure: 0.6 ~ 0.8MPa
- Motor Rotary Speed: 2800r/min
- Blade Specs: (Φ 200~ Φ 110) x Φ 32mm
- Open Tenon (H x W): 70 x 45
- Location Turning Angle: 35°~90°
- Feeding Journey of Worktable: 0 ~ 320mm
- Dimensions: 850 x 740 x 1280mm
- Weight: 300kg

Features:

- It is applicable for the forming of end faces, step surfaces and face grooves of various profiles.
- High precision spindle is set for stable milling. Arbitrary milling of end faces within the range of 35°-90°
- The workbench can be adjusted up and down to facilitate the tool adjustment.
- Tools are mounted to the high-precision spindle, so the operating precision of motor will not affect the cutting tools.
- Linear bearing pair is applied for pneumatic feeding to make the operation stable

Four Head Welding Machine – SHJ4 – 120 x 4500



Specification:

- Input Power: 4.5Kw
- Power Supply: 220V/50Hz
- Working Pressure: 0.6 - 0.8MPa
- Air Consumption: 200L/min
- Welding Height: 20-120mm
- Welding Range: 400-4500mm
- Welding Wide: 120mm
- Overall Dimension: 5300 x 950 x 1700mm
- Weight About: 2000kg

Features:

- Welding Γ 、 \square 、 \square 、 \square 、 \square 、 \square 、 \square shape combined with each other, and may be welded to a range of arbitrary angle.
- Four heads can work independently and can also be linked, flexible combination, high work efficiency.
- Square bearing system guarantees clamping, heating, locating, moving plate precision and reliable performance.
- Solid machine base and structure ensures long life with high accuracy.
- Right head could be 30°~180° arbitrary angle welding.

Three Head Welding Machine – SHJ3 – 120 x 3500



Specification:

- Input Power: 3.5Kw
- Power Supply: 220V/50Hz
- Working Pressure: 0.6 - 0.8MPa
- Air Consumption: 150L/min
- Welding Height: 20-120mm
- Welding Range: 400-3500mm
- Welding Wide: 120mm
- Overall Dimension: 4400 x 950 x 1700mm
- Weight About: 1600kg

Features:

- Welding \triangle 、 \square 、 \square 、 \square 、 \square 、 \square 、 \square 、 \square 、 \square shape combined with each other, and may be welded to a range of arbitrary angle.
- Three heads can work independently and can also be linked, flexible combination, high work efficiency.
- Square bearing system guarantees clamping, heating, locating, moving plate precision and reliable performance.
- Solid machine base and structure ensures long life with high accuracy.
- Right head could be 30°~180° arbitrary angle welding.

Double Head Welding Machine – SHJ2 – 120 x 3500



Specification:

- Input Power: 2.5Kw
- Power Supply: 220V/50Hz
- Working Pressure: 0.6 - 0.8MPa
- Air Consumption: 100L/min
- Welding Height: 20-120mm
- Welding Range: 400-3500mm
- Welding Wide: 120mm
- Overall Dimension: 4400 x 950 x 1700mm
- Weight About: 1200kg

Features:

- Welding Γ 、 \square 、 TT 、 ++ 、 Γ T shape combined with each other, and may be welded to a range of arbitrary angle.
- Two heads can work independently and can also be linked, flexible combination, high work efficiency.
- Square bearing system guarantees clamping, heating, locating, moving plate precision and reliable performance.
- Solid machine base and structure ensures long life with high accuracy.
- Right head could be 30°~180° arbitrary angle welding.

Single Head Welding Machine – SHJ1



Specification:

- Input Power: 1.8Kw
- Power Supply: 220V/50Hz
- Working Pressure: 0.6 - 0.8MPa
- Air Consumption: 80L/min
- Welding Height: 20-120mm
- Welding Wide: 120mm
- Overall Dimension: 700 x 950 x 1700mm
- Weight About: 460kg

Features:

- Welding Δ R E R J shape combined with each other, and may be welded to a range of arbitrary angle.
- Most economical UPVC window welding machinery for low budget investor.
- PLC control system.
- 90° welding, V welding, 30°~180° is possible on this machine.

CNC Corner Cleaning Machine – SQJB-CNC-120



Specification:

- Input Power: 1.5Kw
- Power Supply: 380V/50Hz
- Working Pressure: 0.6-0.8MPa
- Motor Rotary Speed: 2800r/min
- Air Consumption: 80L/min
- Profiles Width: 20-100mm
- Profiles Height: 20-150mm
- Drawing Groove Width: 3mm
- Drawing Groove Depth: 0.3mm
- Over All Dimension: 1600 x 880 x 1650 mm
- Weight About: 600 Kg

Features:

- The machine has the features of novel compact structure.
- Stable performance, safe and reliable, easy operation, high precision, high efficiency, and so on. It is an ideal selection for UPVC door and window industries on a scale.
- Numerical control system is a specialized system for corner-cleaning machine developed by DELTA; it adopts the most advanced LCD touch screen and computer, drive system. The main electrical components are imported components to keep its performance stable.
- The system setting in single step. Customers can select any one of them
- Automatic corner cleaning with the help of the sensors.
- Touch screen is displayed in English.
- The feeding of X and Y axis adopts ball screw transmission with high precision.
- The system can store more than 100 programs, the milling cleaner can be set in two-dimensional geometric locus for external vertical side, and the top and bottom cutters can clean the welding seam at the same time.

Single Manual Corner Cleaning Machine – SQJ05 – 120



Specification:

- Input Power: 1.5Kw
- Power Supply: 380V/50Hz
- Working Pressure: 0.5 ~ 0.8MPa
- Motor Rotary Speed: 2800r/min
- Air Consumption: 100L/min
- Profile Width: 20 – 120 mm
- Profile Height: 20 – 120 mm
- Drawing Groove Width: 3mm
- Drawing Groove Depth: 0.3mm
- Overall Dimension: 1650 x 1300 x 1450mm
- Weight About: 270 kg

Features:

- Cleaning the top, bottom and external surface
- Special cutter to clean the external corner
- Need to change the cutter to clean different kinds of profiles.

V Cleaning Machine – SQJ05 – 120



Specification:

- Working Pressure: 0.5 ~ 0.8MPa
- Air Consumption: 100L/min
- Profiles Width: 40 -120mm
- Profiles Height: 40-120mm
- Drawing Groove Width: 3mm Drawing
- Groove Depth: 0.3mm
- Over All Dimension: 930 x 690 x 1300mm
- Weight About: 100kg

Features:

- The machine is used for UPVC door and window transom “V” shaped welding cleaning.
- Reliable performance, convenient operation, high efficiency.
- The machine is equipped with pneumatic system.

Portable Cleaning Machine (SQ-120)



Specification:

- Working pressure: 0.4 ~0.6MPa
- Air Consumption: 25L/min
- Working Route:170mm
- Profile Width: 30-120mm
- Overall Dimension: 550 x 160 x 190 mm
- Weight: 4.8Kg

Features:

- It is used for clean the surface welding seam of PVC window and door. Pneumatic drive.
- Precise positioning, compact structure and easy operation.

Internal Corner Cleaning (SXN)



Specification:

- Air Pressure: 0.5~0.8MPa
- Air Consumption: 15L/min
- Overall Dimension: 250x58x46mm

Features:

- A special tool used for cleaning the internal welding seam of 90 degree UPVC window and door. For internal corner milling in UPVC window production

External Corner Cleaning (SXW)



Specification:

- Air Pressure: 0.4~0.6MPa
- Air Consumption: 15L/min
- Overall Dimension: 250x58x46mm

Features:

- A special tool used for cleaning the external welding seam of 90 degree UPVC window and door. For external corner milling in UPVC window production



LIPI Marketing Pvt. Ltd.,

Plot no. 28, Venkateswara Colony, 3rd Cross Street, Nehru Nagar, Chennai-600 041, Tamil Nadu, India.

Tel: 91 44 6672 7300/74 Fax: 91 44 2454 0924. email: sales@lipimarketing.com, info@lipimarketing.com

www.lipimarketing.com