



High performance sealants



About Pidilite

Pidilite is a consumer-centric company committed to quality and innovation. For decades, we have been pioneering products for small to large applications at home and industry, which have forged strong bonds with people from all walks of life.

2⁺ 475

Grew from 2 to 475 brands in just 45 years

7,600+

employees

2 million

Strong pan-India dealer & distributor network

10+

manufacturing units

17 overseas subsidiaries with manufacturing facilities in 8 countries

Among top **45** listed companies in India (on market cap)



Market leader in adhesives. Famous for its superior quality, & iconic advertising. Building bonds for more than 60 years.

Araldite®

Epoxy Adhesive made as per evolving needs of users. Comes with the trusted performance of Pidilite / Fevicol.



Trusted performance for all screed, underlayment and tiling applications. A proven single source solution for commercial flooring and walling applications.



Proven structural waterproofing and protection systems, delivering protection and performance in the harshest of environments.



High performance sealant range. Best in class quality at affordable price.

INDEX

01

Feviseal
Range

▪

04

Bonding Application
Procedure

▪

08

Feviseal
GP PRO

▪

11

Feviseal
Multipurpose

▪

14

Fevicol
Nailfree Ultra

02

Feviseal
Application Areas

▪

05

Types of
Sealants

▪

09

Feviseal
Natural Pro

▪

12

Feviseal
Bathroom & Kitchen

▪

03

Gap Filling
Application Procedure

▪

07

Feviseal
GP

▪

10

Feviseal
Weatherproof PRO

▪

13

Fevicol
Powerlocck


Every Professional's Preferred Sealant Choice.



High performance sealants

FROM THE MAKERS OF  FEVICOL

Feviseal Application Areas

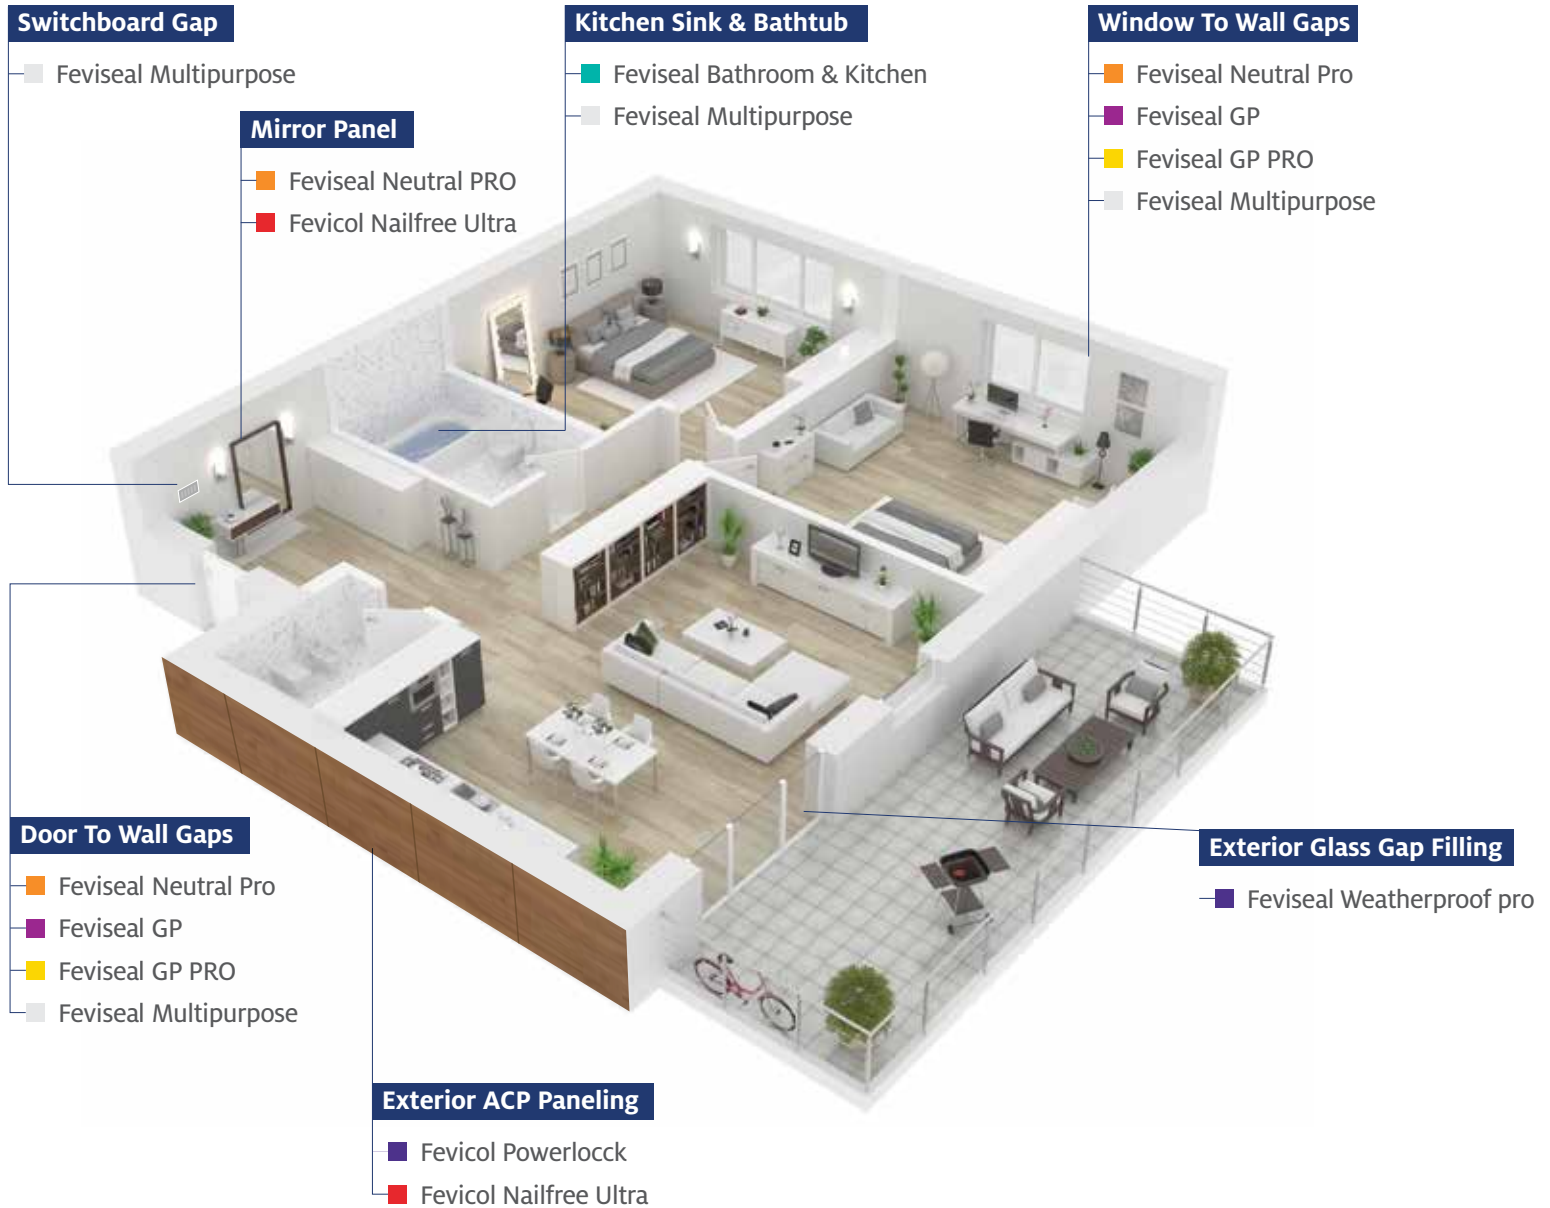

HOW TO APPLY

Gap Filling Application Procedure



1 Clean & Dry surfaces



2 Cut the bottle top



3 Cut the nozzle in 45 degree equal to the gap width




4 Load the cartridge into the gun



5 Fix the masking tape on both sides



6 Fill the sealant into the gap



7 Smoothen sealant bead



8 Remove masking tape before drying



9 Final application

FOR BONDING:

- Apply in vertical beads
- Give 24 hours support

HOW TO APPLY

Bonding Application Procedure



1 Clean & Dry surfaces



2 Use V-cut nozzle only



3 Load cartridge into the gun



4 Apply in zig zag pattern



5 Bond substrates & provide support

*Same process can be followed for Feviseal Neutral Pro and Feviseal Weatherproof Pro bonding applications. Double sided tape is recommended for heavy substrates.




Types of Sealants

Gap Filling

Interior gap filling applications includes door and window gaps, uPVC frame to wall gaps, glass partition gaps, sanitary gaps, electrical gaps etc. Exterior gap filling application includes construction joint gaps, ACP/HPL sheet gaps, glass to glass gaps etc.

Adhesion

Bonding applications includes mirror to ply/ tile/marble bonding, lacquered glass, ACP to Aluminium channel, louver, charcoal sheet bonding etc.

Gap Filling	Adhesion	Gap + Adhesion
		
Acrylic	Hybrid Rubber	Acetoxy  Neutral

Types of Sealants

Gap Filling



Towel Rack



Door



Adhesion



ACP building



Mirror bonding



Gap filling + Adhesion



Bathroom



Ceiling





FEVISEAL GP

Silicone-based sealant used for bonding and interior gap-filling applications.

**EXCELLENT
CLARITY**

**FAST
CURING**

**CONVENIENT
TOOLING**

**COST
EFFECTIVE**

Gap Filling: Most interior gap filling applications including Glass partitions, Al/Steel/Non-oily Wood, Al/Wood window/door frames and sanitary joints.

Bonding: Can be used for bonding between glass, metal, tiles and wood.

Packsizes: 280 ml, 260 ml **Colour:** Black, Clear, White

Skin Formation Time (min) at 25 Deg C, 50-60% RH: 5-8

Application Temperature Range (Deg C): 0-45





FEVISEAL GP PRO

Premium Grade Silicone-based sealant used for bonding and interior. gap-filling applications.

**FAST
CURING**

**CONVENIENT
TOOLING**

**ANTI-
FUNGAL**

**LOW
VOC**

Gap Filling: Most interior gap filling applications including Glass partitions, Al/Steel/Non-oily Wood, Al/Wood window/door frames and sanitary joints.

Bonding: Can be used for bonding between glass, metal, tiles and wood.

Packsizes: 280 ml, 260 ml **Colour:** Black, Clear, White

Skin Formation Time (min) at 25 Deg C, 50-60% RH: 8-12

Application Temperature Range (Deg C): 0-50





FEVISEAL NEUTRAL PRO

Multi-purpose, tough neutral cure silicone sealant for flexible panel bonding and gap filling applications. Can be used for all types of general interior gap sealing. Non-corrosive to metal, painted surfaces, stones and masonry.

**MULTISUBSTRATE
ADHESION**

**NO ACID
RELEASE**

**INTERIOR
APPLICATION ONLY**

**ANTI-
FUNGAL**


Gap Filling: Most interior gap filling applications including Glass partitions, Al/Steel/Non-oily Wood, Al/Wood window/door frames and sanitary joints.

Bonding: Can be used for bonding Glass, Mirror, Aluminium, Steel, Concrete, Stone, Marble, Brick, Ceramics, Painted Surfaces, PVC.

Packsize: 280 ml **Colour:** Black, Clear, White

Skin Formation Time (min) at 25 Deg C, 50-60% RH: 8-12

Application Temperature Range (Deg C): 0-50

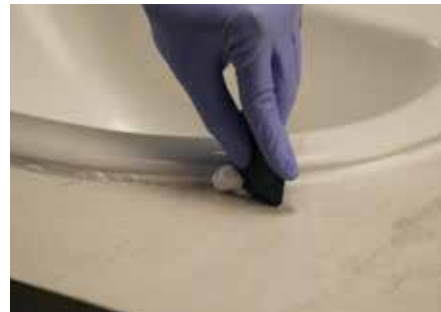



FEVISEAL WEATHERPROOF PRO

Neutral cure weather Sealant which cures into tough and flexible rubber. It is ideal for use in exterior gap filling applications & can withstand joint movement upto +/-20%.

**EXCELLENT
WEATHERABILITY**

**EXTERIOR AND INTERIOR
APPLICATIONS**

**UV
RESISTANT**

**ISO 11600
CERTIFIED**

Gap Filling: Most exterior gap filling applications including Glass partitions, Al/Steel/Non-oily Wood, Al/Wood window/door frames and sanitary joints.

Bonding: Can be used for bonding Glass, Mirror, Aluminium, Steel, Concrete, Stone, Marble, Brick, Ceramics, Painted Surfaces, PVC

Packsize: 280 ml / 600 ml Sausage **Colour:** Black, Clear, White

Skin Formation Time (min) at 25 Deg C, 50-60% RH: 8-12, 20-30

Application Temperature Range (Deg C): 0-50





FEVISEAL MULTIPURPOSE

Water based sealant for interior gap filling applications with excellent adhesion to most construction substrates.

*Not suitable for bonding applications.

PAINTABLE

**GAP FILLING
APPLICATIONS ONLY**

**INTERIOR
USE**

**ANTI-FUNGAL
ANTI-ALGAE**

Gap Filling: For glass partitions, window/door frames, kitchen sanitary ware.

Packsizes: 280 ml

Colour: Black, Clear, White

Skin Formation Time (min) at 25 Deg C, 50-60% RH: 8-12

Application Temperature Range (Deg C): 5-40





FEVISEAL BATHROOM & KITCHEN

Unique anti-fungal (ASTM G21 compliant) product for filling gaps in Sanitary fittings in Kitchen and Bathroom. It acts as a barrier to dust, insects, etc.

PAINTABLE

**GAP FILLING
APPLICATIONS ONLY**

**INTERIOR
USE**

**ANTI-FUNGAL
ANTI-ALGAE**

Gap Filling: For glass partitions, window/door frames, kitchen sanitary ware, wash basins, bath tubs etc.

Packsizes: 280 ml / 600 ml Sausage

Colour: Glossy White

Skin Formation Time (min) at 25 Deg C, 50-60% RH: 8-12

Application Temperature Range (Deg C): 5-40





FEVICOL POWERLOCCK

Multipurpose construction adhesive sealant. With high initial grab, it eliminates need for nailing in most of the applications & can be used for bonding multiple substrates.

**STRONG
GRAB**

**MULTISUBSTRATE
ADHESION**

**EXTERIOR AND
INTERIOR
APPLICATIONS**

**WATER &
WEATHER
RESISTANT**

For bonding ACP to plywood, aluminium channel or masonry surface. For bonding wide range of substrates including wood, gypsum, aluminium, galvanized iron, steel, fibrous cement sheet wall & floor panels.

*Not meant for gap filling.

Packsizes: 320 gm

Colour: Off-White





FEVICOL NAILFREE ULTRA

High strength, quick grab sealant which bonds multiple substrates. It is environment friendly, has good weatherability and high durability.

**STRONG
GRAB**

**MULTISUBSTRATE
ADHESION**

**ENVIRONMENT
FRIENDLY**

**UV & WEATHER
RESISTANT**

Bonding: Can be used for interior & exterior fit-outs like mounting mirrors, glass, decorating ply with stones, marbles, wall tiles, uPVC & ACP panels. It also works on wet surfaces.

Packsize: 435 gm **Colour:** White

Skin Formation Time (min) at 25 Deg C, 50-60% RH: 8-12

Application Temperature Range (Deg C): 5-40



Every Professional's Preferred Sealant Choice.



PIDILITE INDUSTRIES LIMITED
 Ramkrishna Mandir Road,
 Andheri (E) Mumbai - 400059.

✉ csc@pidilite.com 📞 1800 266 6066



Scan QR code for digital brochure