

*Experience
The Art of Windows*



PRIMETECH[®]
UPVC PROFILE

UPVC Windows | Casement Windows | Tilt and Turn Windows
Sliding Windows | Casement Doors | Sliding Doors

www.primetechupvc.com

Advantage of UPVC Windows

Stability

Physical stability : UPVC window have a better strength of anti compression, tensile, crack and inflation than wooden and aluminum windows. No aluminum oxidation. UPVC profile can stand the wind, rain,sunshine, dry and moisture in -30°C to $+70^{\circ}\text{C}$. The earliest UPVC windows used in Europe is still in good condition for more than 40 years.

Corrosion Resistance : Specially suitable for high pollution cities and beach area. UPVC Doors and windows system can withstand any corrosion caused by such conditions, even in beach area residencies,humid weather is unable to corrode, or damage UPVC profiles



Excellent Function

Excellent Function Excellent Water Resistance: UPVC door and window systems employ a corner welding process to ensure that the window or door corner is completely welded into a single structure; therefore water is unable to pass through the welded joint. Excellent Fire Proofing: UPVC profile systems are fully self extinguishing


Maintenance Free

Maintenance Free No painting, No scraping, No puttying, No termites.


Environmental Friendly

Environmentally Friendly UPVC profile systems are made from ecologically friendly materials and environmentally safe in terms of less pollutant emissions than wood and aluminum. Polymer is recyclable, and so there is no lost materials as all waste goes back into the recycling process.




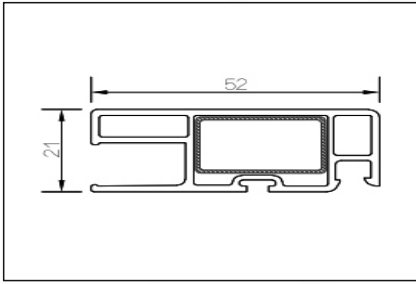


Name: 88 screen sash
Code: TLDSS
Weight(KG/M): 0.500 Length: 5.8M
PCS/BAG: 12 Thickness: 1.5MM

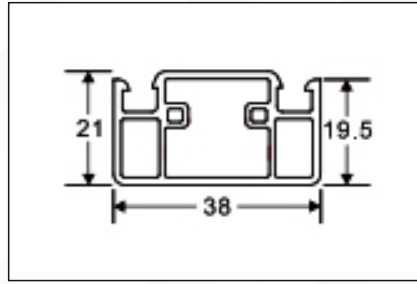


Name: mesh mullion
Code: TLDSS02
Weight(KG/M): 0.35 Length: 5.8M
PCS/BAG: 15 Thickness: 1.5MM

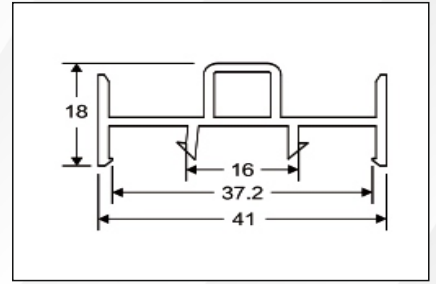


Name: sash cover
Code: 88GM
Weight(KG/M): 0.284 Length: 5.8M
PCS/BAG: 20 Thickness: 1.5MM

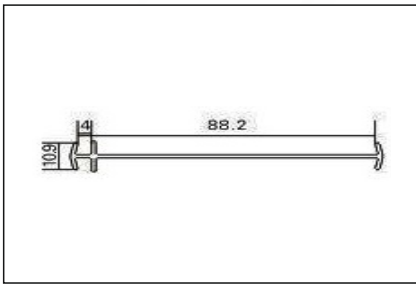


Name: frame connector
Code: 88couping
Weight(KG/M): 0.300 Length: 5.8M
PCS/BAG: 30 Thickness: 1.5MM

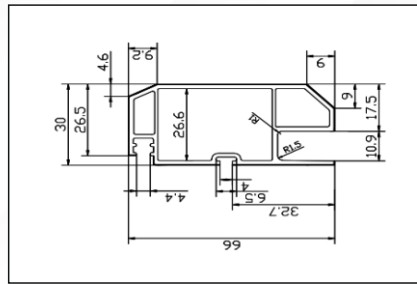


Name: Door mesh
Code: Door mesh
Weight(KG/M): 0.630 Length: 5.8M
PCS/BAG: 10 Thickness: 1.5MM

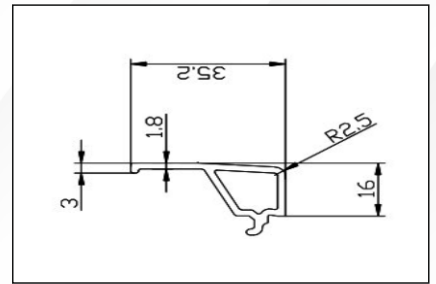

Name: 112mesh bead
Code: 112mesh bead
Weight(KG/M): 0.25 Length: 5.8M
PCS/BAG: 20 Thickness: 1.5MM

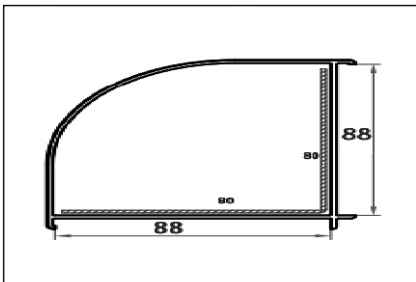


Name: T88ZJ
Code: 88 corner
Weight(KG/M): 0.970 Length: 5.8M
PCS/BAG: 4 Thickness: 1.4MM

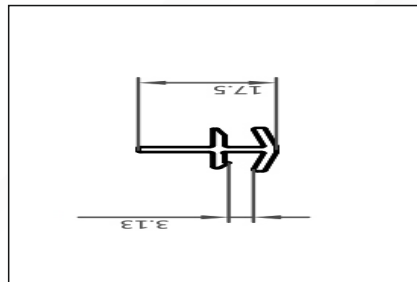


Name: Amberrelor coupling
Code: 88PT
Weight(KG/M): 0.1 Length: 5.8M
PCS/BAG: 40 Thickness: 1.5MM




97/82/80/55MM Sliding Series

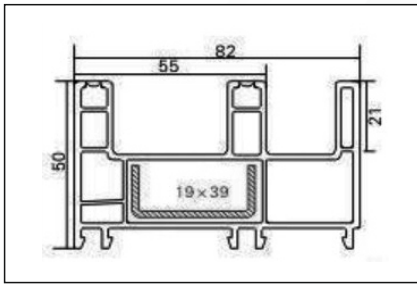


Name: 82Frame
Code: T82K-C
Weight(KG/M): 1.180 Length: 5.8M
PCS/BAG: 6 Thickness: 2.0MM

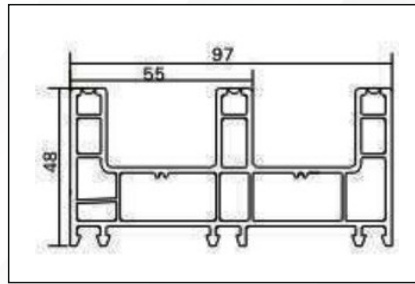


Name: 97Frame
Code: T97K-C
Weight(KG/M): 1.380 Length: 5.8M
PCS/BAG: 6 Thickness: 2.0MM

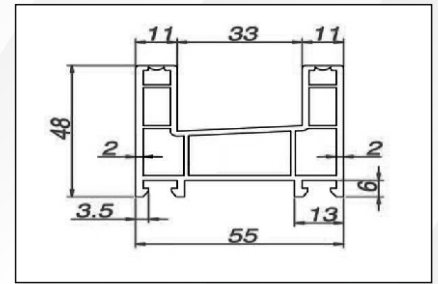


Name: 55Frame
Code: T55K_B
Weight(KG/M): 0.93 Length: 5.8M
PCS/BAG: 6 Thickness: 2.0MM

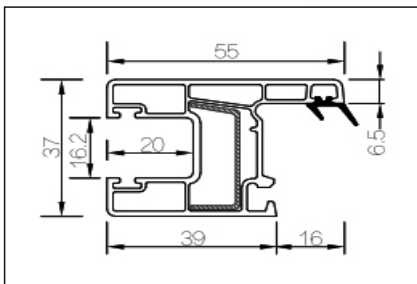


Name: 80 sash 55mm
Code: T80S-D
Weight(KG/M): 0.784 Length: 5.8M
PCS/BAG: 8 Thickness: 2.0MM

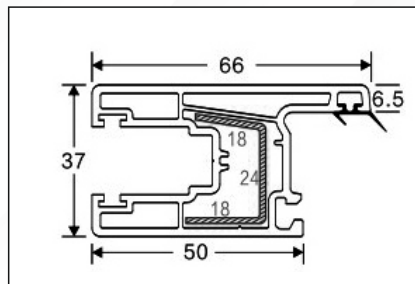


Name: 80 sash 66mm
Code: T80S-ZT
Weight(KG/M): 0.921 Length: 5.8M
PCS/BAG: 8 Thickness: 2.0MM

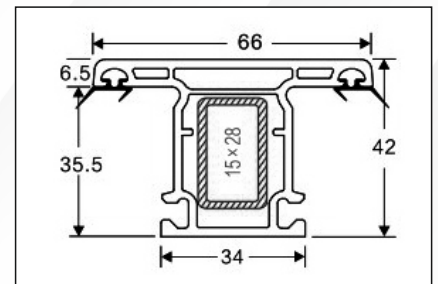


Name: 80sash mullion
Code: T80S-ZT
Weight(KG/M): 0.848 Length: 5.8M
PCS/BAG: 8 Thickness: 2.0MM

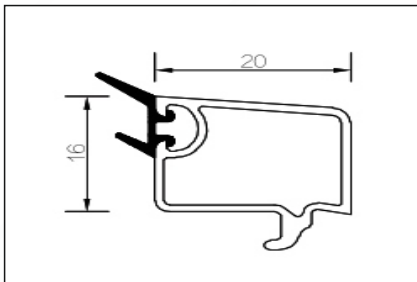


Name: 80 single glazing bead
Code: TLDY-20C
Weight(KG/M): 0.230 Length: 5.8M
PCS/BAG: 30 Thickness: 1.5MM

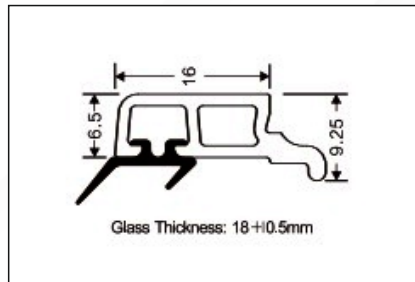


Name: 80 Doubt glazing bead
Code: TLDY-6.5C
Weight(KG/M): 0.230 Length: 5.8M
PCS/BAG: 40 Thickness: 1.2MM

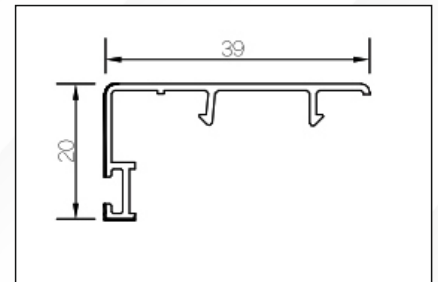


Name: 80 interloge
Code: T80FG
Weight(KG/M): 0.167 Length: 5.8M
PCS/BAG: 6 Thickness: 1.3MM

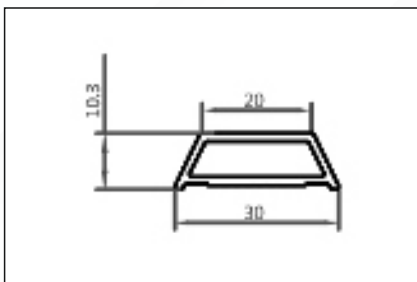


Name: Gerogen bar for all sash
Code: Bar01
Weight(KG/M): 0.160 Length: 5.8M
PCS/BAG: 20 Thickness: 1.5MM

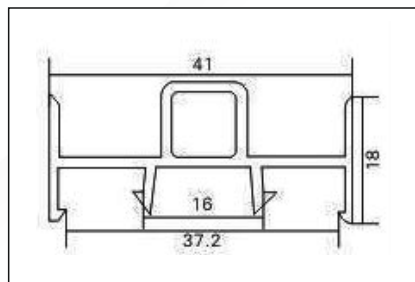


Name: 80sash cover
Code: 80GM
Weight(KG/M): 0.25 Length: 5.8M
PCS/BAG: 20 Thickness: 1.5MM

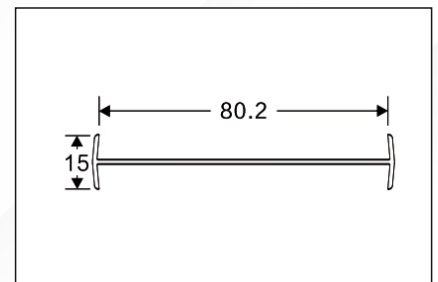

Name: 80 coupling
Code: 80CP
Weight(KG/M): 0.2 Length: 5.8M
PCS/BAG: 30 Thickness: 1.2MM

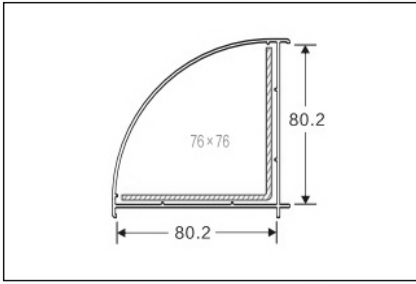


Name: 80 corner
Code: 80/80zj1
Weight(KG/M): 0.78 Length: 5.8M
PCS/BAG: 4 Thickness: 1.5MM

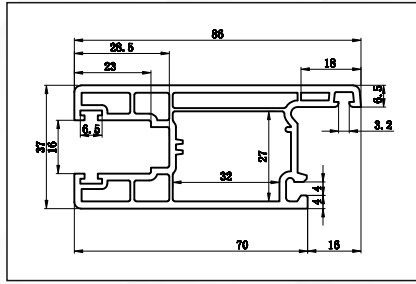


Name: 80 shahs 86mm
Code: T80MS
Weight(KG/M): 0.78 Length: 5.8M
PCS/BAG: 6 Thickness: 2MM




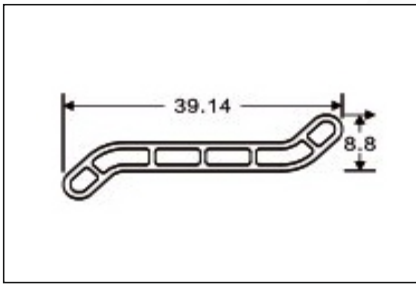


Name: Z blade
Code: Z blade
Weight(KG/M): 0.26 Length: 5.8M
PCS/BAG: 30 Thickness: 1.5MM

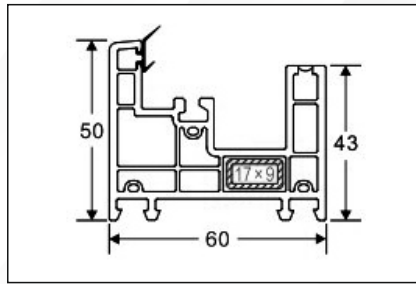

Name: 60PKTLK
Code: 60casement sliding frame
Weight(KG/M): 1.15 Length: 5.8M
PCS/BAG: 6 Thickness: 2.0MM

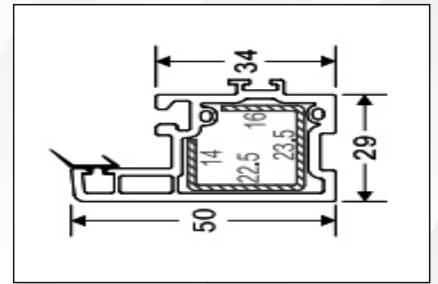

Name: 60PKTLZT
Code: 60 casement/sliding Mullion
Weight(KG/M): 0.64 Length: 5.8M
PCS/BAG: 6 Thickness: 2.0MM

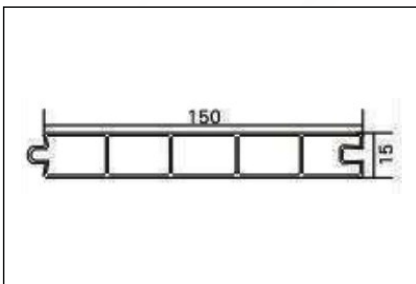

Name: 15*150 Door Panel
Code: 15*150 Door Panel
Weight(KG/M): 0.667 Length: 5.8M
PCS/BAG: 6 Thickness: 2.0MM



Sliding Series

- Application | For residential APT (In land)
- Glass | 4-18mm (up to 20mm with in use of silicon)

Features

- Double sealed interlocking parts Minimizing the inflow of dust and enhanced the insulation performance
- Easy and high-quality installation one touch stopper
- Improved water tightness
- Attachable and inbuilt bug mesh frame system



Benefit for Partner

Customer Benefit

- Processes for Order / Delivery Management, Claim handling are systemized with specially trained human resources.
- System for order and delivery has improved accuracy and efficiency of work.
- Enhanced SCM functionality improved productivity, payment and optimized stocks.

Claim Management

- Claim handling work has been worked with consistency.
- Sales results and customer history are managed by system.
- Rule has been set to promote activities to improve customer services.

Partners Training Opportunities

- Providing technical source book.
- Technical seminar & training program.
- Professional consulting to the people who would like to start window business.



AN ISO 9001 : 2015 CERTIFIED CO.



APTS Quality Certifications
Certificate of Registration

The APTS Quality Certifications hereby certifies that:

PRIME CORP,
 PRIMETECH UPVC PROFILE,
 Survey No. 141/C and D, Door No. 4-37, Donnara Pochampally,
 Gandimakanima X Road, Durgal Municipalty,
 Hyderabad, Medchal - Malajgiri, Telangana, 500043.

has been found to conform to the Quality Management System Standard:

ISO 9001:2015
 with a scope of:
 Trading of UPVC Profiles.

*This certificate is being issued in accordance with ISO 17021:2015 as required by conformity assessment bodies. APTS Quality Certifications is accredited by Standards Accreditation Council for Assessment Services Providers (SACASP), an independent accreditation body complying to ISO 17011: 2016. The validity of the certificate is subjected to periodic surveillance audits and an complete review, every three years of the management system. The validity of the certificate can be obtained by verifying in the website www.aptsqc.org.

Certificate Number : APTS QMS 898
 Date of Initial Registration : 16/02/2023
 Registration Validity : 15/02/2024
 Recertification Date : 15/02/2026

Controller of Certification
 APTS Quality Certifications
www.aptsquality.com

APTS
 Assessment Process Transformation Systems



APTS Quality Certifications
 CERTIFICATE OF REGISTRATION

APTS Quality Certifications hereby certifies that:

PRIME CORP,
 PRIMETECH UPVC PROFILE,
 Survey No. 141/C and D, Door No. 4-37, Donnara Pochampally,
 Gandimakanima X Road, Durgal Municipalty,
 Hyderabad, Medchal - Malajgiri, Telangana, 500043.

has been found to conform to the Quality Management System Standard:


ISO 9001:2015
 with a scope of:
 Trading of UPVC Profiles.

*This certificate is being issued in accordance with ISO 17021:2015 as required by conformity assessment bodies. APTS Quality Certifications is accredited by Standards Accreditation Council for Assessment Services Providers (SACASP), an independent accreditation body complying to ISO 17011: 2016. The validity of the certificate is subjected to periodic surveillance audits and an complete review, every three years of the management system. The validity of the certificate can be obtained by verifying in the website www.aptsqc.org.

Certificate Number : APTS QMS 898
 Date of Initial Registration : 16/02/2023
 Registration Validity : 15/02/2024
 Recertification Date : 15/02/2026

Controller of Certification
 APTS Quality Certifications
www.aptsquality.com

APTS
 Assessment Process Transformation Systems



Global Footprint:



PRIMETECH[®]
 UPVC PROFILE

Corporate Office:
PRIME CORP
 Hyderabad, Telangana
 Mobile: 90303 49953
 E-mail: info@primetechupvc.com
www.primetechupvc.com

@primetechupvc

