TRUSPACER
窗利来

盘锦窗利来中空玻璃材料有限公司

PANJIN TRUSPACER INSULATING GLASS MATERIAL CO., LTD.

地址：辽宁省盘锦市大洼县新材料园区

Add: New Material Park, Dawa County, Panjin City, Liaoning Province, China.

电话(Tel)：86-427-6852078 6852077

传真(Fax)：0427-6852080

网址（Web）：www.jinyumf.com

E-mail：sales@truspacer.net/zhuchengmf@yeah.net

全国服务热线：400-0427-080



TRUSPACER INSULATING GLASS SOLUTIONS

T R U S P A C E R

CATALOGUE
目录

01 COMPANY PROFILE
品牌故事

03 I.G FLEXIBLE SPACER
中空玻璃胶条系列


11 NEW COMPOUND SPACER
中空玻璃间隔条系列

13 OTHER IG MATERIALS
其他中空玻璃材料

15 I.G PRODUCTION LINE
中空玻璃生产线系列

17 I.G EQUIPMENT
中空玻璃设备系列

19 ENTERPRISE STRENGTH
公司实力

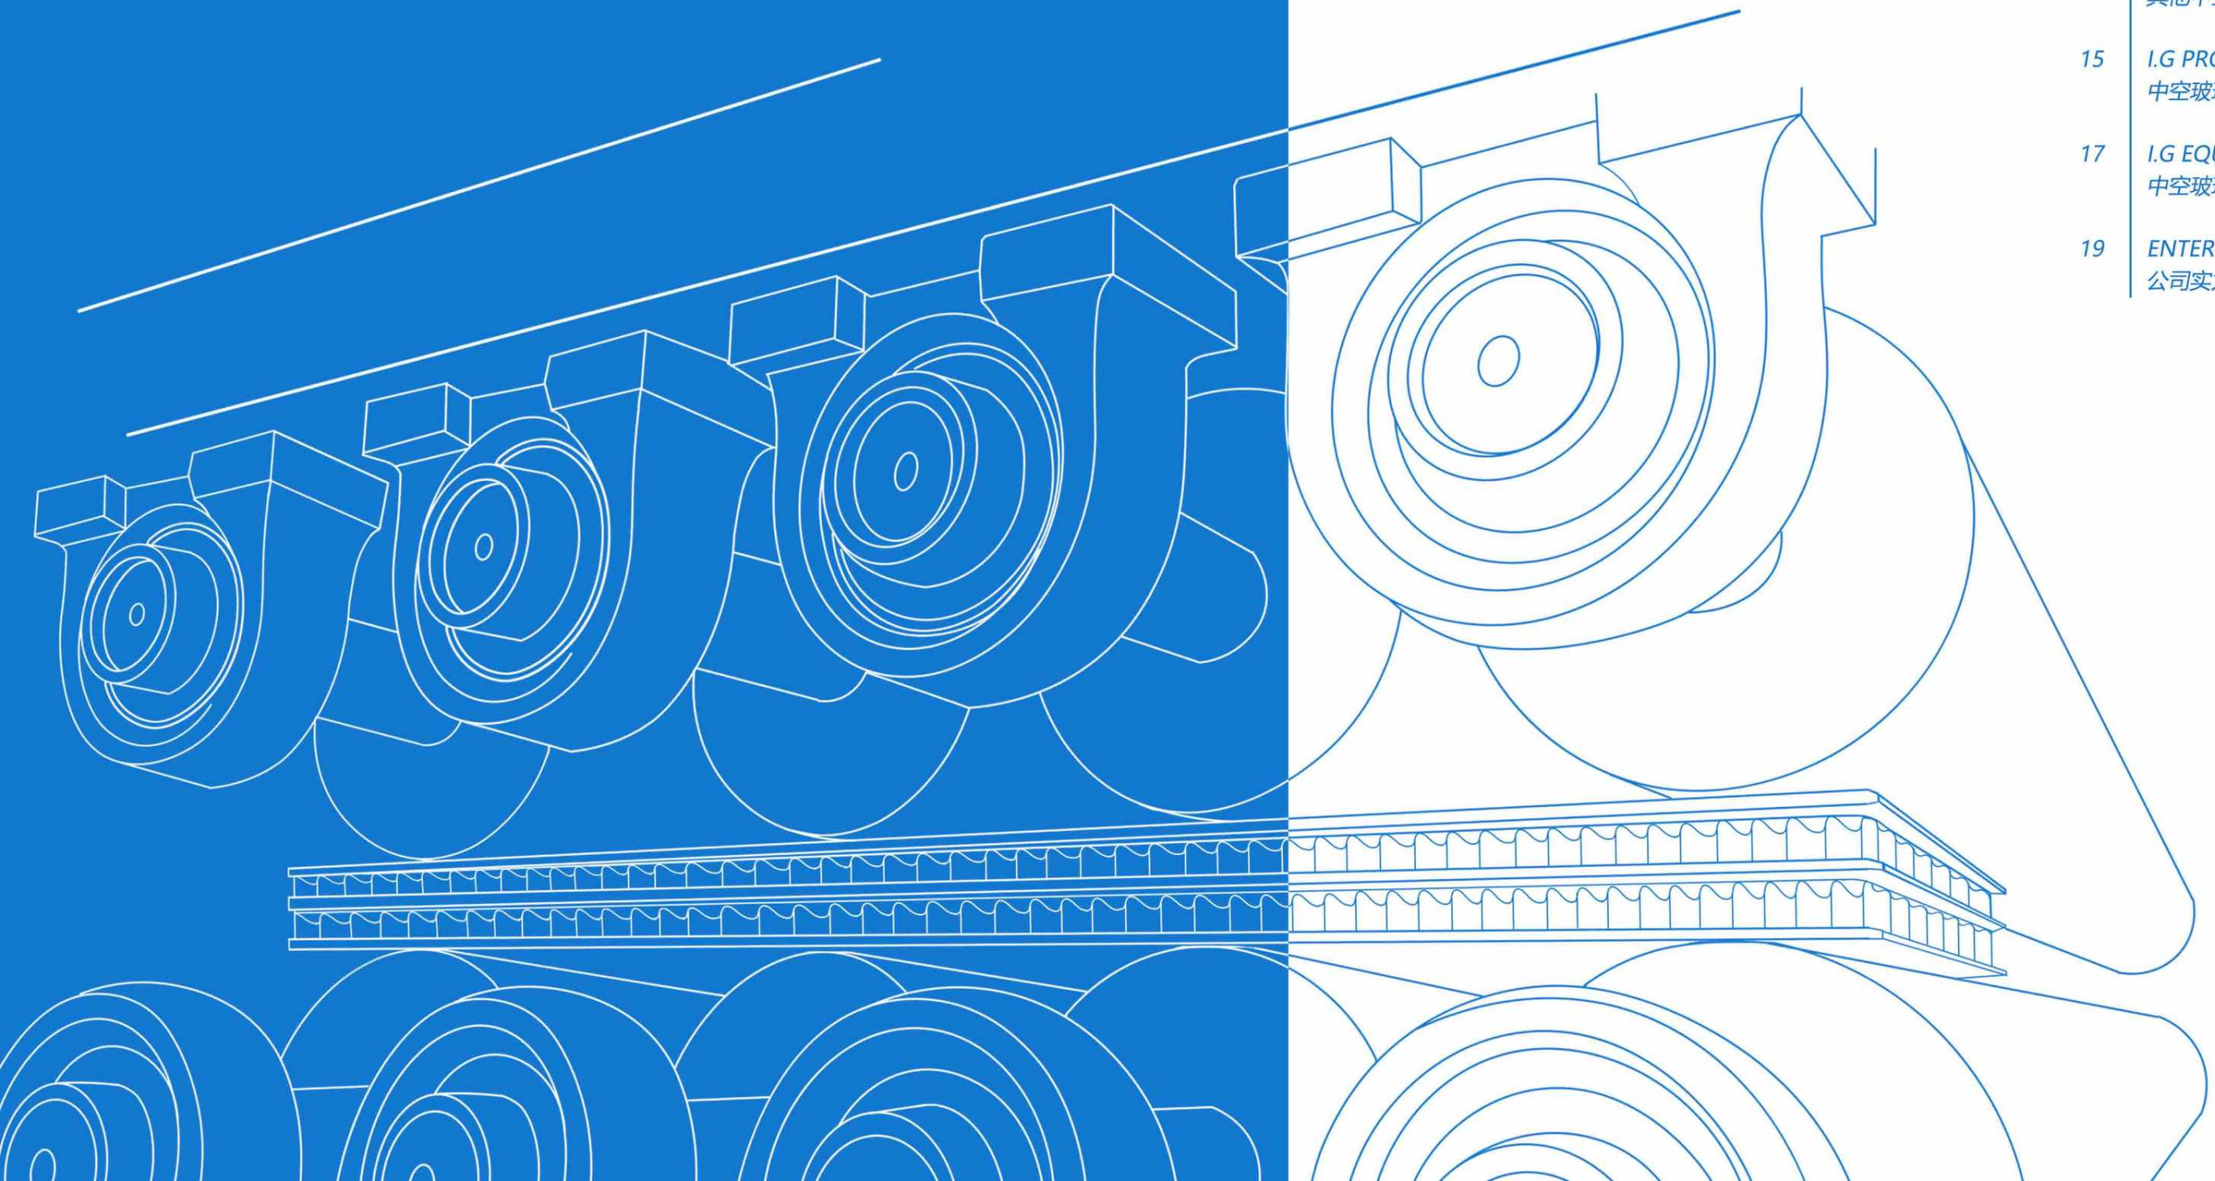



Brand Story
品牌故事

拼搏成就梦想，时间印证品质！

党忠民，窗利来公司创始人，国产中空玻璃胶条研发人。年少时党忠民的父母不幸病逝，早年的艰辛让他懂得唯有不断拼搏才能改变命运的道理，于是在1996年，有着国企工作的他毅然决然的承包了濒临破产的金宇门窗配件厂，正式走上了创业的道路。

一次机缘巧合中，他发现了一款进口的中空玻璃复合胶条，可以节省中空玻璃制作成本而且节能环保，但是价格昂贵且供货周期长，不服气的他，暗自决定要做出属于中国人自己的胶条。历经上百次的辛苦试验后产品终于研发成功，相比昂贵的进口胶条，这款国产胶条大幅地降低了中空玻璃生产企业的成本，提高了门窗的保温隔热性能，胶条投入市场后广受好评，成功引领了门窗用户的节能环保理念，这就是第一代窗利来复合胶条。

随着企业不断的成长，生产线也从建厂初期的一条增加到了三十条，现拥有专利十四项，持续更新的胶条产品先后通过了美国IGCC认证和欧洲认证。自从打入国际市场以来，产品已销往全球六十多个国家和地区，窗利来终于证明了“中国制造”一样可以成为世界一流产品！

Work hard to achieve dreams, time proves quality!

Dang Zhongmin, founder of Truspacer, researcher and developer of domestic IG spacers. Dang Zhongmin’ s parents passed away unfortunately when he was young, the hardships of his early years taught him the truth that only constant struggle can change his destiny. So in 1996, he resolutely contracted the Jinyu Doors and Windows Fittings Factory, which was on the verge of bankruptcy, and he officially embarked on the road of entrepreneurship.

In a coincidence, he discovered an imported IG butyl sealant spacer, which can save the cost of IG production and is energy-saving and environmentally friendly. However, the price is expensive and the delivery time is long. Unconvinced, he secretly decided to make it belong to the Chinese own butyl sealant spacer. After hundreds of hard tests, the product was finally successfully developed. Compared with expensive imported butyl sealant spacer, this domestic butyl sealant spacer greatly reduces the cost of IG manufacturers and improves the thermal insulation performance of doors and windows. The butyl sealant spacer got widely praised after being into the market, it successfully led the concept of energy saving and environmental protection for door and window users. This is the first generation of Truspacer butyl sealant spacer.

With the continuous growth of the company, the number of production lines has increased from one at the beginning of the factory to 30, and now has 14 patents. The continuously updated butyl sealant spacer products have successively passed the US IGCC certification and the European certification. Since entering the international market, its products have been sold to more than 60 countries and regions around the world. Truspacer finally proved that "Made in China" can also become a world-class product!

创始人邮箱 Founder's email：greatzhuchengdzm@126.com

窗利来®中空玻璃暖边胶条

Truspacer® Warm Edge Spacer For IG

简介 Introduction

窗利来®中空玻璃暖边胶条是一种新型暖边间隔系统，它预装了丁基密封胶、3A分子筛、波浪铝带、隔热条等，适合大批量生产双层和三层中空玻璃，替代传统中空玻璃生产模式，大幅提高生产效率。

Truspacer® is a warm edge spacer system ideal for high-volume production of double and triple pane insulating glass，it is preassembled with butyl sealant, 3A molecular sieve, undulating aluminum spacer bar and heat insulation strip and so on，it can replace the traditional IG production mode and greatly improve production efficiency.

特点 Features


- 不需要二道密封胶。
- 密封性能好。
- -40℃不结露。
- 抗紫外线能力优异。
- 卓越的氩气保持性能。
- 可做异形玻璃。

- No need the secondary seal.
- Good sealing performance.
- No dew at -40℃.
- UV resistance excellent.
- Excellent argon retention performance.
- It can be used for special-shaped glass.

应用 Application range

可用于门窗、汽车、火车、冷藏柜等中空玻璃的制作。

It can be used in the production of insulating glass for doors and windows, buses, trains, refrigerator, etc.

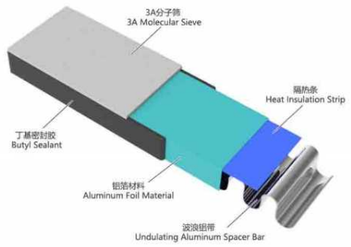




窗利来®全塑中空玻璃暖边胶条

Truspacer® Plastic Warm Edge Spacer For IG

简介 Introduction

这是一种不含金属的暖边间隔系统，它预装了丁基密封胶、3A分子筛、波浪形高分子材料、隔热条等，适合大批量生产双层和三层中空玻璃，保温隔热效果更显著。

It is a metal-free warm edge spacer system ideal for high-volume production of double and triple pane insulating glass，it is preassembled with butyl sealant, 3A molecular sieve, undulating polymer material and heat insulation strip and so on，more significant thermal insulation effect.





特点 Features

- 无金属导热，真正的暖边间隔系统。
- 不需要二道密封胶。
- -40℃不结露。
- 抗紫外线能力优异。
- 卓越的氩气保持性能。
- 超长的潮气传送通道。

- Real warm edge spacer, no metal.
- No need the secondary seal.
- No dew at -40℃.
- UV resistance excellent.
- Excellent argon retention performance.
- Long moisture transmission channel.

应用 Application range

可用于门窗、汽车、火车、冷藏柜等中空玻璃的制作。


It can be used in the production of insulating glass for doors and windows, buses, trains, refrigerator, etc.

郑重声明：本公司所有产品已申请专利，严禁模仿或盗用，公司拥有专业的律师团队，如有发现侵权行为，必追究其法律责任!
Patented products, counterfeiting not allowed!

窗利来超级胶条®

Super Truspacer®

简介 Introduction

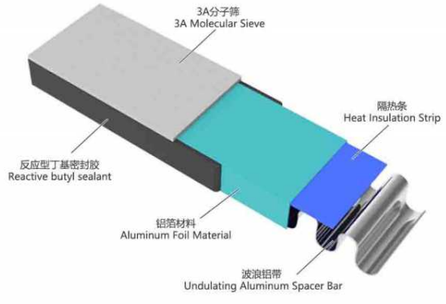

该产品是一款最新研发的高强度、高稳定性、高粘接力的超级胶条。它是一种新型的中空玻璃密封系统，胶条自身预装了反应型丁基密封胶、3A分子筛、波浪铝带、隔热条等。当制作中空玻璃后，胶条与玻璃可长效粘结。

This product is a newly developed Super Truspacer with high strength,high stability and high adhesion.It is a new type of insulating glass sealing system,the Super Truspacer itself is pre-mixed with reactive butyl sealant,3A molecular sieve,wave aluminum strip,heat insulation strip and so on. After the insulating glass is made, the Super Truspacer can be bonded to the glass for a long time.

特点 Features

- 超级胶条采用更牢固、更持久的粘接方式。
- 超级胶条的剪切力是传统胶条的 4 倍。
- 胶条内溢和内移情况大幅度减少。
- 操作简单、可配套自动化设备。
- 对环境友好，无污染、无损健康。
- 设备投资少，占地面积小，仅需两人即可操作。
- 具有更强的抗龟裂和抗老化能力。
- 含有长效密封丁基胶成分，氩气保持长久。
- 自带分子筛、自带丁基胶、无需二道胶。

- Super Truspacer adopt a stronger and more durable bonding method.
- The shear force of Super Truspacer is four times that of traditional sealing spacer.
- The situation of spacer overflow and inward movement is greatly reduced.
- Simple operation,can be matched with automation equipment.
- Energy saving,noise reduction,no pollution,no harm to health.
- Less equipment investment,small footprint,only two people can operate.
- It has stronger anti-cracking and anti-aging ability.
- Contains long-acting sealing butyl adhesive composition,can keep argon gas for a long time.
- It comes with molecular sieve,butyl sealant,no need second sealant.

应用 Application range

可用于门窗、汽车、火车、冷藏柜等中空玻璃的制作。

It can be used in the production of insulating glass for doors and windows, buses, trains, refrigerator, etc.


窗利来®防火玻璃胶条

Truspacer® Fireproof Glass Spacer

简介 Introduction

该产品主要由丁基密封胶和高分子粘合剂等材料制成，适用于灌注型防火玻璃的边部密封。

It is made of butyl sealant, polymer adhesive and so on, it suitable for the edge sealing of infused fireproof glass.

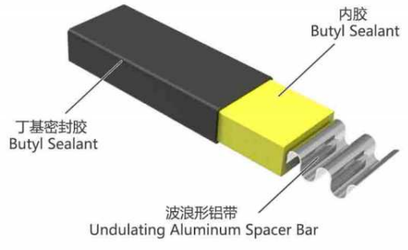

特点 Features

- 密封性能好。
- 支撑力强，确保防火玻璃尺寸精准。
- 不与防火液发生化学反应。
- 使用方便，更高效。

- Good sealing performance.
- Strong supporting force to ensure accurate glass assembly.
- No chemical reaction with fireproof liquid.
- Easy to use and more efficient.



应用 Application range

- 灌注型防火玻璃。
- 适用于碱性或酸性防火液。

- Infused fireproof glass.
- Suitable for alkaline or acid fireproof liquid.

产品参数 Product parameters

产品规格 Product specifications	颜色 Color	内部包装 Inner packing	包装方式 Packing method
1-20mm（可定制） Customizable	黑 Black	小盘 5m/Roll	纸箱 Carton packing

郑重声明：本公司所有产品已申请专利，严禁模仿或盗用，公司拥有专业的律师团队，如有发现侵权行为，必追究其法律责任！
Patented products, counterfeiting not allowed!

TBSE® 双道密封柔性间隔条

TBSE® Dual seal flexible spacer

简介 Introduction

该产品用于中空玻璃边部双道密封中的第一道密封，可代替传统工艺中的铝间隔条，该产品添加了丁基密封胶和分子筛，可与二道胶牢固粘结，结构性强，同时具有连续柔性暖边的特性。

The product is used for the first seal in the double seal of insulating glass, which is used to replace the aluminum spacer of the traditional process, add butyl sealant and molecular sieve. It can be firmly bonded with secondary sealant, and the supporting force is strong. At the same time, it has the characteristics of continuous flexible warm edge.



特点 Features

- ◆ 双道密封。
  Dual seal.
- ◆ 结构性强。
  The supporting force is strong.
- ◆ 拐角不需要切割，折弯。
  Corners do not need to be cut or bent.
- ◆ 卓越的氩气保持性能。
  Excellent argon retention performance.
- ◆ 可做异形玻璃。
  It can be used for special-shaped glass.
- ◆ 隔热性能优良。
  Excellent thermal insulation performance.


应用 Application range

用于中空玻璃双道密封中的第一道密封，其背部铝箔膜可与二道密封胶牢固粘接，与玻璃形成可靠的结构性。可用于中空玻璃的所有场合。省去传统工艺中，制框、灌装、涂布等工艺，提高生产效率。

It is used for the first seal in the double seal of insulating glass, the aluminum foil film on the back can be firmly bonded with the second sealant to form a reliable structure with the glass. It can be used in all applications of insulating glass. Eliminate the traditional process, frame making, filling, coating and other processes to improve production efficiency.

产品结构 Product structure




1. 二道密封胶（需客户自备）secondary seal（To be provided by the customer）
2. 铝箔材料 Aluminum Foil Material
3. 特制内胶 Special inner rubber
4. 支撑带 Support belt
5. 丁基密封胶 Butyl Sealant
6. 3A分子筛 3A Molecular Sieve

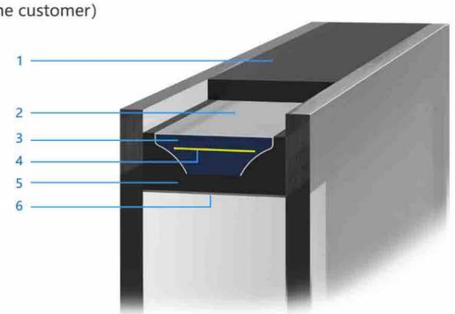

制作工序 Production process

- 码条（自动/人工）
- 合片
- 板压或辊压（冷压）
- 涂二道密封胶

- The application of spacer(automatic/manual)
- Glass combined
- Flat press or roller press (Cold press)
- Apply the secondary seal

TBSE胶条人工生产中空玻璃 Manual production





TBSE胶条配合自动化设备生产中空玻璃 Automatic production

郑重声明：本公司所有产品已申请专利，严禁模仿或盗用，公司拥有专业的律师团队，如有发现侵权行为，必追究其法律责任!
Patented products, counterfeiting not allowed!


窗利来®中空玻璃镶嵌胶条

Truspacer® Decorative Glass Spacer

简介 Introduction

该产品由丁基密封胶、分子筛、内胶（骨架胶）三大功能区构成，并有波浪形铝带作支撑，产品结构设计独特而实用，生产操作简单，质量易于控制。

This product consists of three major functional elements, including the butyl sealant, molecular sieve and internal adhesive (skeleton adhesive), with the wavy aluminum strip as support, bringing a unique and practical structure design of the product. Its production and quality control proves to be easy, it is suitable for making decorative glass.

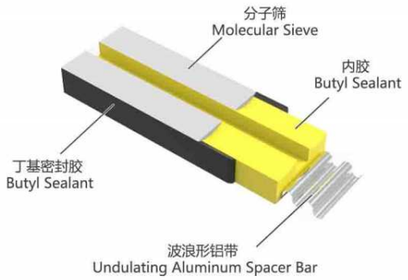



特点 Features

- 耐老化性能优异。
- 高分子粘合剂保证优良的密封性。
- -40℃不结露。
- 防错片性能优异。
- Excellent aging resistance performance.
- Polymer adhesive guarantees excellent sealing performance.
- No dew at -40℃.
- Excellent prevents misalignment performance.

应用 Application range

- 适用于制作中空镶嵌玻璃。
- 胶条可独立密封，也可涂结构胶来增强其结构性（需做相容性试验）。
- Suitable for making hollow decorative glass.
- The spacer can be sealed independently, or it can be coated with structural glue to enhance its structure (compatibility test is required).


金宇®中空玻璃胶条

Jinyu® Compound Spacer For IG

简介 Introduction

该产品由丁基密封胶、高分子粘合剂、分子筛和波浪形铝带复合而成，具有优良的密封效果，超强的干燥能力和极低的水汽渗透率。


This product is made from high-quality butyl sealant, polymer adhesives, molecular sieve and continuous undulating aluminum spacer bar. The product has a good sealing effect, super drying ability and extremely low water vapor permeability.

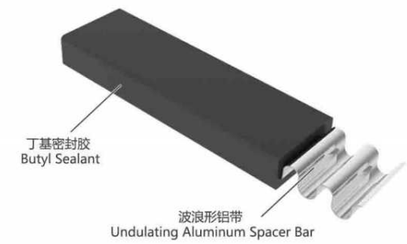



特点 Features


- 不需要二道密封胶。
- 密封性能好。
- 抗结露性能优异。
- 耐老化能力强。
- 生产速度快，节约成本。
- 有效节省人工。
- No need the secondary seal.
- Good sealing performance.
- No dew at -40℃.
- UV resistance excellent.
- Fast production speed, cost saving.
- Effective labor saving.

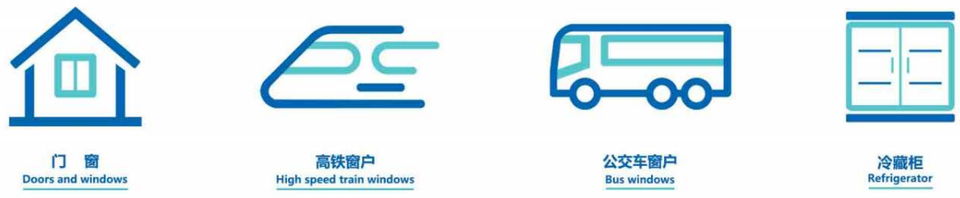

郑重声明：本公司所有产品已申请专利，严禁模仿或盗用，公司拥有专业的律师团队，如有发现侵权行为，必追究其法律责任!
Patented products, counterfeiting not allowed!

窗利多®中空玻璃复合间隔条

Truleader® Insulating Glass Compound Spacer

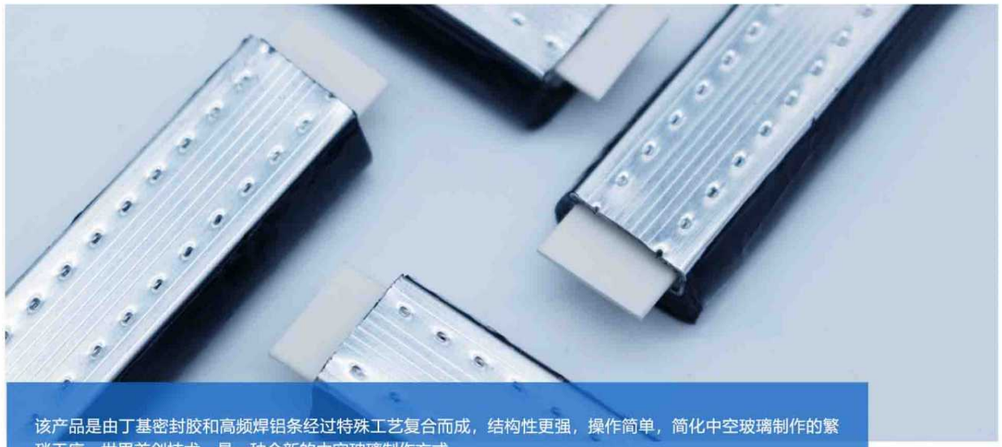

该产品是由丁基密封胶和高频焊铝条经过特殊工艺复合而成，结构性更强，操作简单，简化中空玻璃制作的繁琐工序，世界首创技术，是一种全新的中空玻璃制作方式。

This product is compounded by butyl sealant and aluminum spacer through a special process, with stronger structure, it is easy to operate and it greatly simplifies the tedious processes of IG production, the world's first technology, it is a new way of making IG.

特点 Features

- 生产效率是铝条工艺的2倍。
- 不需要二道密封胶。
- 减少80%机械投入。
- 无需固化时间。
- 自带丁基密封胶。

- The production efficiency is twice that of the aluminum bar process.
- No need secondary seal.
- Reducing the investment of machinery by 80%.
- No curing time.
- Self-contained butyl sealant.

应用 Application range

隔条可独立密封，也可涂结构胶来增强其结构性（需做相容性试验）。


The spacer can be sealed independently, or it can be coated with structural glue to enhance its structure (compatibility test is required).

产品参数 Product parameters

产品规格 Product specifications	可选颜色 Color	内部包装 Inner packing	包装方式 Packing method
6-27mm（可定制） Customizable	银色/黑色 Silver/Black	5米/根 5m/pc	纸箱 Carton packing

产品结构 Product structure

1. 高频焊铝条　High frequency welding aluminum bar
2. 3A分子筛条（选配）　3A molecular sieve strip (Optional)
3. 内胶　Inner rubber
4. 丁基密封胶　Butyl sealant

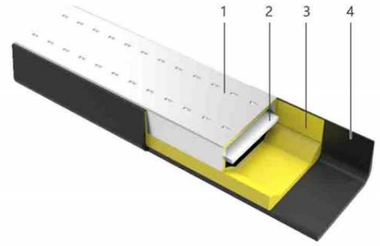


制作工序 Production process


- 清洗玻璃
- 窗利多隔条制框
- 中空玻璃合片
- 中空玻璃热压

- Cleaning glass
- Frame the Truleader spacer
- Assembly the glass and spacer
- Hot-pressed the IG





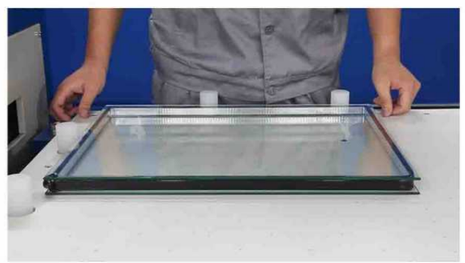

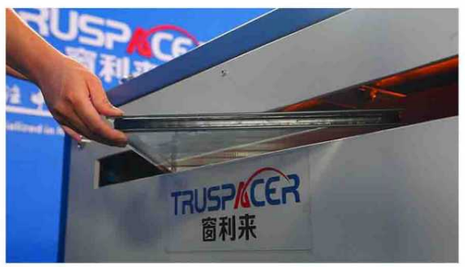

郑重声明：本公司所有产品已申请专利，严禁模仿或盗用，公司拥有专业的律师团队，如有发现侵权行为，必追究其法律责任！
Patented products, counterfeiting not allowed!

中空玻璃用热塑间隔密封胶 CLL-TPSS-R

Thermoplastic spacer sealant for insulating glass CLL-TPSS-R

简介 Introduction

中空玻璃用热塑间隔密封胶CLL-TPSS-R是一种反应型热塑性密封胶，内含分子筛，具备低水汽透过率，高黏结性、同时具有良好的热稳定性。有效抵挡水汽的同时与玻璃能够较好的黏结，对于提高中空玻璃寿命具有重要意义。其主要用于中空玻璃生产，与双组份硅酮胶使用完成双道密封。



Thermoplastic spacer sealant for insulating glass CLL-TPSS-R is a reactive thermoplastic sealant, containing molecular sieves, with low water vapor permeability, high adhesion, and good thermal stability. Effectively resist moisture while maintaining good adhesion with glass,which is of great significance for improving the life of insulating glass. It is mainly used in the production of insulating glass and is used in conjunction with two-component silicone adhesive to achieve dual sealing.

特点 Features

- 氩气保持率高，成品玻璃无拼接缝隙，是连续密封胶的绝对密封腔体，即超级密封中空玻璃。使用 25年，氩气不低于80%，内部不起雾、不结露，与硅酮密封胶黏结性好，寿命超长。
- 对比传统铝隔条工艺更美观，且解决了传统丁基胶内溢问题。
- Argon retention rate is high, the finished glass has no splicing gap, and it is an absolute sealing cavity of continuous sealant, that is super sealed insulating glass. After 25 years of use, the argon gas inside the insulating glass is not less than 80%, and there is no fog or dew inside the insulating glass, it also has good adhesion performance with silicone sealant and it has a long life.
- Compared to traditional aluminum spacer technology, it is more aesthetically pleasing and perfectly solves the problem of butyl sealant overflow.

包装 Package

- 铁桶包装220kg（Φ572mm）
- Iron drum packaging 220kg （Φ572mm）

运输 Transport

- TPSS-R为非危险品，可通过火车、轮船、汽车、飞机运输。
- TPSS-R is a non hazardous material that can be transported by train, ship, car, or airplane.


贮存 Store away

- 最佳贮存条件阴凉通风干燥处，保质期为12个月。
- The optimal storage conditions are in a cool, ventilated, and dry place, with a shelf life of 12 months.

窗利来®中空玻璃用长条3A分子筛

Truspacer® Long-striped 3A Molecular Sieve for IG

简介 Introduction

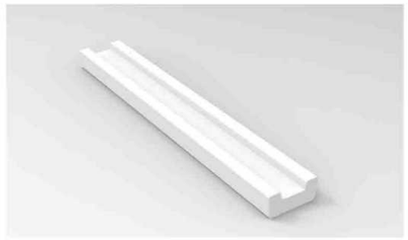

该产品由3A分子筛原粉和高分子材料制成，可完美代替传统颗粒分子筛。

The product is made of 3A molecular sieve raw powder and polymer materials, which can perfectly replace traditional particle molecular sieve.

特点 Features

- 灌装简单，效率是传统颗粒分子筛的7倍。
- 无需机器。
- 有效吸潮时间可长达168个小时。
- 小包装，使用方便。
- The filling is simple and the efficiency is 7 times that of the traditional particle molecular sieve.
- No machine required.
- Effective moisture absorption time can be up to 168 hours.
- Small package, easy to apply.

应用 Application range

代替颗粒分子筛，吸收中空玻璃腔体内的水汽。

Instead of particle molecular sieves, it absorbs moisture in the insulating glass space layer.


产品参数 Product parameters

	3A分子筛条 striped 3Amolecular sieve	3A分子筛（颗粒） 3A molecular sieve (particles)
设　备 Equipment	无需设备 手工灌装 No equipment required	分子筛灌装机 Need equipment
静态水吸附 Static adsorbed water	≥16.3 %	≥20 %
露点 Dew point	≤-60℃	≤-60℃
包装含水量 Moisture content in packaging	≤1	≤1.5
灌装速度（200g） Manual filling speed (200g)	10s	72s

郑重声明：本公司所有产品已申请专利，严禁模仿或盗用，公司拥有专业的律师团队，如有发现侵权行为，必追究其法律责任！
Patented products, counterfeiting not allowed!

CLLQT-1600/1800窗利来®卧式中空玻璃生产线


CLLQT-1600/1800 Truspacer® Horizontal Insulating Glass Production Line

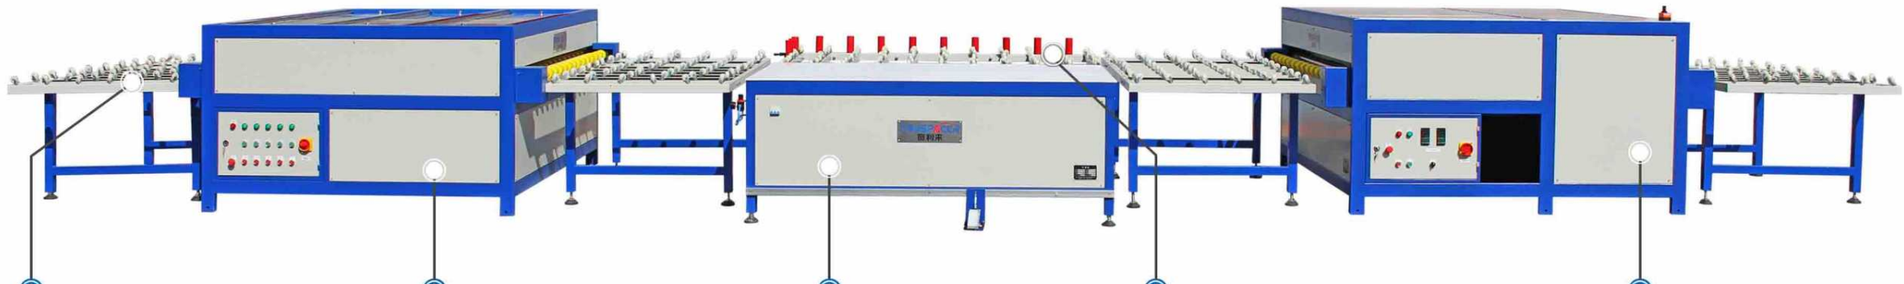

简介 Introduction

CLLQT-1600/1800窗利来®卧式中空玻璃生产线是由我公司独立研发，生产，用于制作中空玻璃的现代化生产线。本生产线采用水平卧式结构，具有传送平稳、占地面积小、耗电量低、所需操作人员少、生产效率高、质量稳定等优点，是生产复合胶条式中空玻璃的必备设备。

CLLQT-1600/1800 Truspacer® horizontal insulating glass production line is independently developed and manufactured by our company，it is a modern production line that is used to make IG. This machine adopts horizontal structure, transfer smoothly, small footprint, low power consumption, fewer people to operate, high production efficiency, stable quality, saving cost, which makes it is a necessary machine to make compound sealing spacer IG.

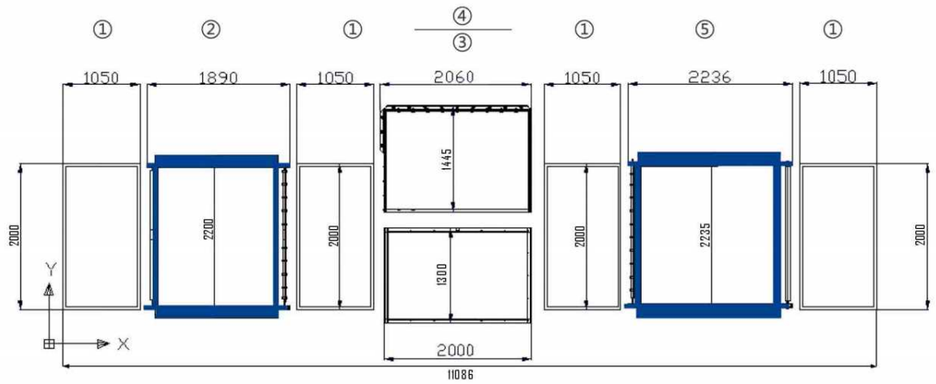

特点 Features

- 操作简单，生产效率高。
- 占地面积小，节约空间。
- 玻璃传送平稳。
- This production line is easy to operate and efficient.
- Small footprint, saving space.
- It can transport glass stably.

产品参数 Product parameters

型 号 Model	电 源 Power	玻璃最大宽度（mm） Max glass width	玻璃最小宽度（mm） Min glass width	总功率（Kw） Total	气源压力（Mpa） Source pressure
CLLQT-1600	380V 50HZ	≤1600	400	28.5	0.6
CLLQT-1800	380V 50HZ	≤1800	400	32	0.6

郑重声明：本公司所有产品已申请专利，严禁模仿或盗用，公司拥有专业的律师团队，如有发现侵权行为，必追究其法律责任!
Patented products, counterfeiting not allowed!

窗利来®卧式手动折弯机

Truspacer® Horizontal Manual Bending Machine



简介 Introduction

卧式手动折弯机是用于制作窗利多复合间隔条中空玻璃的专用设备，此设备可将窗利多复合间隔条制作成多种尺寸的矩形框，制框后可以角部封口也可边部封口。该设备具备定尺切割功能，操作简单，安全稳定。

Truspacer® horizontal manual bending machine is a special equipment used to make Truleader composite spacer IG. This equipment can make Truleader composite spacer into rectangular frames of various sizes. After the frame is made, it can be sealed at the corners or at the edges. The equipment has the function of cutting to length, simple operation, safe and stable.

特点 Features

- 隔条6-27mm多规格、多尺寸适配。
- 设有直插与角插两组折弯模式选择。
- 支持直插接料连续使用，材料不浪费。
- 德国西门子PLC控制系统 。
- 高精度光电传感器，具备空机保护功能。

- Spacer size from 6to27mm，multi-specification, multi-size adaptation.
- There are two sets of bending modes，edge or corner connection.
- Support continuous bending when using the connector, no waste of materials.
- Germany Siemens PLC control system.
- High-precision photoelectric sensor, with empty machine protection function.

窗利来®分子筛灌装机

Truspacer® Molecular Sieve Filling Machine

简介 Introduction

分子筛灌装机主要用于窗利多复合间隔条制作的角部封口矩形框的分子筛灌装工作。

Molecular sieve filling machine is mainly used for molecular sieve filling of Truleader compound spacers frame that corner sealing.



特点 Features

- 料筒采用透明亚克力管，分子筛状态清晰可见。
- 出料口可以左右40度旋转，并由弹簧柱塞定位，方便灌装大尺寸隔条框架。
- 每个出料口的通断都由单独的时间继电器控制，通过时间值控制灌装量。

- The barrel is transparent acrylic, the state of the molecular sieve is clearly visible.
- The discharge port can be rotated 40 degrees left and right, and is positioned by a spring plunger, which is convenient for filling a large size spacer frame.
- The on-off of each discharge port is controlled by a separate time relay, and the filling volume is controlled by the time value.

产品参数 Product parameters


- 适用分子筛直径 Diameter of molecular sieve：0.5mm
- 隔条尺寸支持 Spacer size range：6-27mm
- 尺寸规格 Size：400×360×2300mm
- 气压 Air pressure：0.6Pa
- 电压 Voltage：220v
- 功率 Power：50w

郑重声明：本公司所有产品已申请专利，严禁模仿或盗用，公司拥有专业的律师团队，如有发现侵权行为，必追究其法律责任！
Patented products, counterfeiting not allowed!

Enterprise Strength
公司实力



国际认证 （美国IGCC / ISO9001 / 欧洲EN1279 / 俄罗斯GOST / 韩国KTR / CE认证）

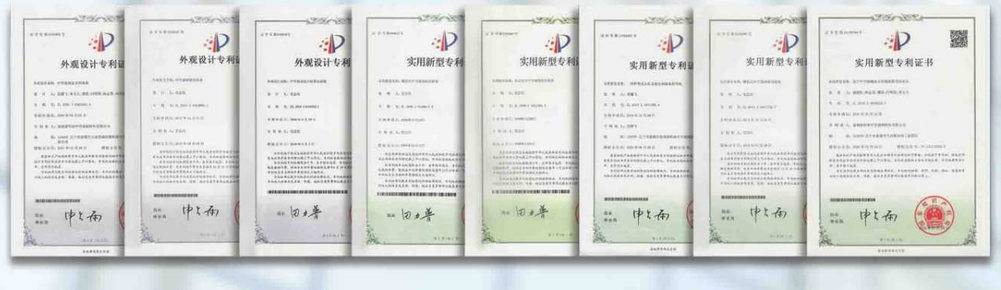

专利证书 Patent certificate



国家检测 National testing

技 术 TECHNOLOGY

窗利来拥有一支优秀的研发团队，将用户的需求变为可能，持续创新，让中空玻璃制作更简单。

Truspacer has an excellent R&D team, which makes possible the needs of users, continues to innovate, and makes the production of insulating glass easier.



检 测 TESTS

窗利来具备中空玻璃国家检测的自检能力，产品先后通过了国内外多项权威认证和测试。


Truspacer has the self-inspection capability of the national inspection of insulating glass, and our products have passed many authoritative certifications and tests at home and abroad.



质 量 QUALITY

窗利来出口全球六十多个国家和地区，产品质量得到了国内外客户的一致认可和好评。

Truspacer products are exported to more than 60 countries and regions around the world, and the product quality has been unanimously recognized and praised by customers at home and abroad.

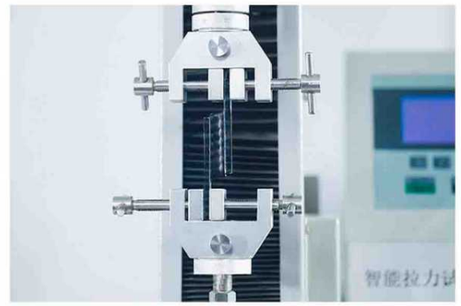

服 务 SERVICE

窗利来专业严谨的技术团队，不断完善的服务体系，为您的产品品质保驾护航。

Truspacer's professional and rigorous technical team and continuous improvement of the service system guarantee the quality of your products.

