
国内区域联系人

西北区（陕晋甘宁青新蒙） 16637954188
西南区（川渝滇桂贵藏） 18538873798
华南区（粤闽赣鄂湘琼） 17644494188
华东区（沪苏浙皖豫） 13849980561
华北区（鲁冀京津辽吉黑） 15515571371


International Regional Contacts

Vivi WhatsApp:+86 17796732160
Allen WhatsApp:+86 15824947561
Jerry WhatsApp:+86 18438583823
May Whatsapp:+86 18438552841

洛阳迪赛机械设备有限公司
LUOYANG DISAI MECHANICAL EQUIPMENT CO., LTD
洛阳市老城区苏滹沱工业区
Suhutuo Industry Area, Laocheng District, Luoyang, China.
13849980561
www.disaiglass.com

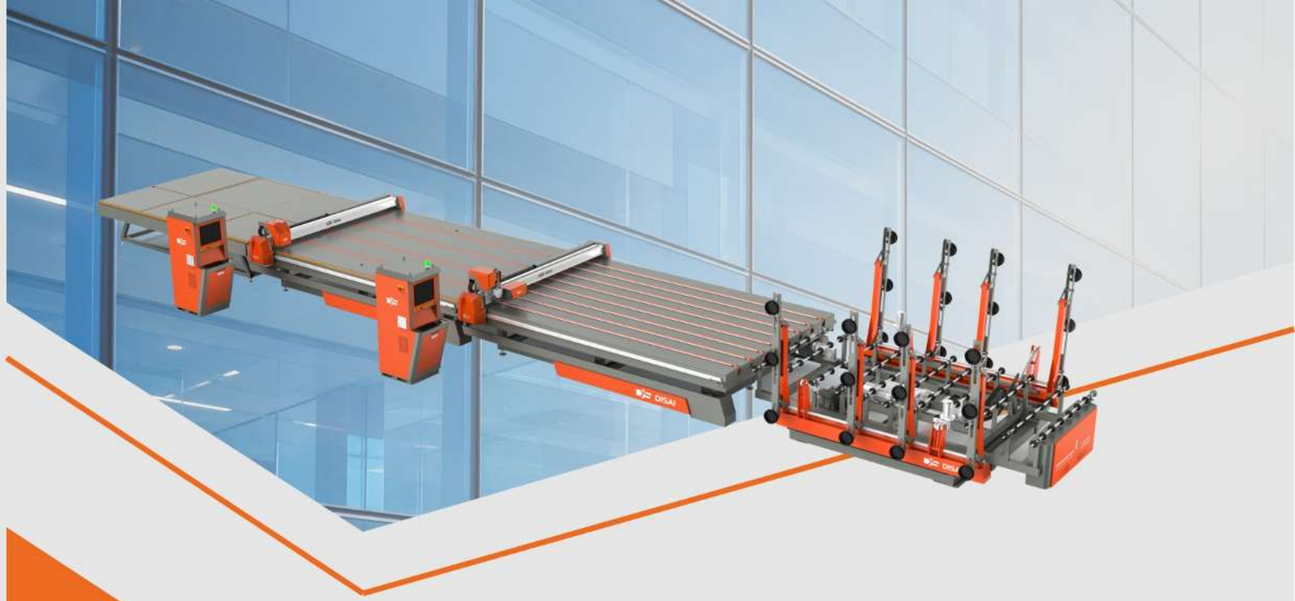

DISAI

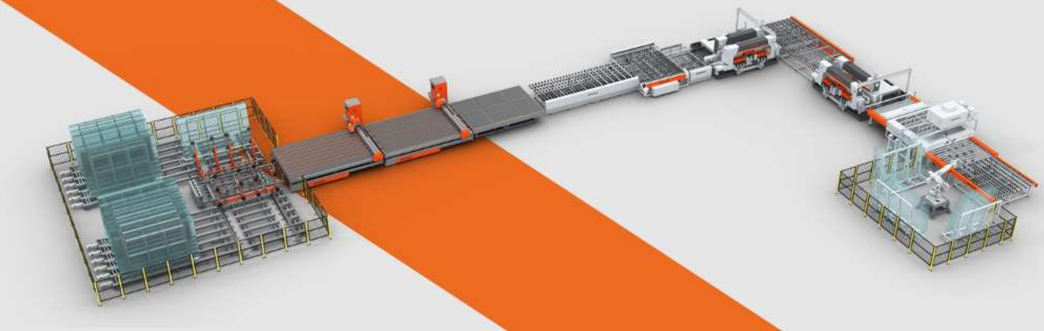

Make glass processing easier
让玻璃加工更轻松

Make glass quality superior
让玻璃品质更高端

洛阳迪赛机械设备有限公司
LUOYANG DISAI MECHANICAL EQUIPMENT CO., LTD




**20**
20年专业经验
20 Years of Professional Experience

**5**
5个销售代表处
5 Sales Representatives Offices

**1000+**
1000余套年产成套玻璃深加工设备
1,000+ Sets of Glass Deep Processing Equipment Annually

**100+**
100+出口国家
100+ Countries Served

**100**
100项专利技术
100 Patented Technologies

# 迪赛简介
# ABOUT DISAI

洛阳迪赛机械设备有限公司成立于2014年，是一家专业研发和生产玻璃深加工设备及自动化装备的企业。建筑面积超过16,000平方米，创始人拥有20多年玻璃加工设备行业经验。

迪赛服务于国内2000多家玻璃深加工用户，产品销往全球100多个国家和地区，已获得100项专利。公司始终重视产品质量和技术研发，致力于推动玻璃加工设备向高端化、智能化发展。

目前，迪赛的产品主要包括全自动玻璃切割机、激光打标设备、激光打孔设备、自动上下片设备、玻璃理片系统、玻璃原片仓储系统、智能移动玻璃架、切磨洗预处理连线及钢化中空连线等。

从原材料进厂到设备交付，每一道生产工序都经过严格管控。产品投放市场以来，受到国内外玻璃加工企业的认可，并积累了良好的客户口碑。

迪赛扎根中国，服务全球，以高品质产品和全面的技术服务协助客户提升玻璃加工效率。迪赛始终坚持“我生产，我负责”的质量理念，认真做好每一台设备，用心服务每一位客户。

Established in 2014, LUOYANG DISAI MECHANICAL EQUIPMENT CO., LTD. specializes in the research, development, and manufacturing of glass-processing equipment and automation systems. DISAI features a built-up area exceeding 16,000 square meters and a founder with over 20 years of industry experience.

We have served more than 2,000 glass processors in China, with products supplied to over 100 countries and regions worldwide. Holding 100 patents, DISAI continuously advances glass-processing machinery toward higher performance and smarter operation.

Our product range includes automatic glass cutting machines, laser marking and drilling equipment, automatic loading and unloading systems, glass sorting and raw sheet storage systems, cutting-edging-washing preprocessing lines, and tempering-to-insulating connection lines.

From incoming materials to equipment delivery, every stage is subject to strict quality control, earning us a strong reputation globally. Guided by our principle, “We manufacture it, and we take responsibility for it,” DISAI provides premium equipment and comprehensive technical support to maximize efficiency for every customer we serve.

DISAI

DISAI SMART GLASS EQUIPMENT

# 迪赛智能玻璃设备



## CONTENTS
## 目录



切磨洗预处理连线 04
Preprocessing Line For Cutting , Edging and Washing


钢化–中空连线 06
Intelligent Buffer Sorting for Tempering and Insulating


全自动玻璃切割机（三段式） 08
Automatic Glass Cutting Machine(Three-Section)


全自动（激光打标）玻璃切割机（四段式） 10
Automatic(Laser Marking) Glass Cutting Machine(Four-Section)


全自动（激光打孔）玻璃切割机（四段式） 12
Automatic(Laser Drilling) Glass Cutting Machine(Four-Section)

14 全自动激光打标机（单头） 
Automatic Laser Marking Machine (Single Laser)


15 全自动激光打标机（双头）
Automatic Laser Marking Machine (Double Laser)


16 全自动激光打孔机（单头）
Automatic Laser Drilling Machine (Single Laser)


17 全自动激光打孔机（双头）
Automatic Laser Drilling Machine (Double Laser)


18 全自动玻璃激光打孔打砂机
Automatic Glass Laser Drilling And Sandblasting Machine


19 翻转式玻璃切割台
Tilting Glass Cutting Table



一体式玻璃切割台（自动上片） 20
Integrated Glass Cutting Table (Automatic Loading)


一体式玻璃切割台(辅助上片) 21
Integrated Glass Cutting Table (Manual Loading)


智能玻璃缓存与理片系统 22
Intelligent Glass Buffering And Sorting System


中空立式理片系统 24
Intelligent Vertical Sorting Machine


抽屉式智能原片仓储系统 26
Drawer-type Intelligent Glass Sheet Storage System


穿梭车式智能原片仓储系统 28
Shuttle-type Intelligent Glass Sheet Storage System

30 智能移动玻璃仓储架
Intelligent Mobile Glass Storage Rack


31 智能搬运机械臂
Intelligent Carrying Robot Arm


32 智能整厂监控
Intelligent Whole Factory Monitoring


33 玻璃深加工ERP管理软件
Glass Deep Processing ERP Management Software


34 售后服务/创新成果
After-sales Service/Innovation Outcomes



36 国内市场客户分布图
Distribution Map of Domestic Market Customers


# 切磨洗预处理连线
PREPROCESSING LINE FOR CUTTING ,EDGING AND WASHING




## 产品描述 PRODUCT DESCRIPTION

本设备为玻璃深加工一体化智能预处理生产线，集原片智能仓储、自动上片、在线激光打标、全自动高精度切割、双边精磨边连线、智能高速清洗、机械手智能下片、自动分架储片全工序，实现玻璃从原片入库到预处理成品归架全程无人化、自动化、智能化闭环生产。
整线打通各工序节拍壁垒，适配建筑玻璃、家具玻璃、家电玻璃、卫浴玻璃等多品类批量标准化加工，彻底替代传统分段人工流转模式，是玻璃工厂降本、提质、增效、标准化生产的核心智能装备。

This integrated intelligent preprocessing line for glass deep processing integrates intelligent glass sheet storage, auto loading, in-line laser marking, high-precision automatic cutting, double-sided fine edging, high-speed intelligent cleaning, robotic unloading and automatic rack separation.
It delivers fully unmanned, automatic, closed-loop intelligent production from glass sheet storage to pre-processed glass racking.
The line helps coordinate takt times between processes. It supports mass production of architectural, furniture, home appliance and bathroom glass, replacing traditional manual segmented handling. It is key intelligent equipment for glass plants to reduce costs, upgrade quality, raise productivity and realize standardized manufacturing.

# 钢化-中空连线
INTELLIGENT BUFFER SORTING FOR TEMPERING AND INSULATING

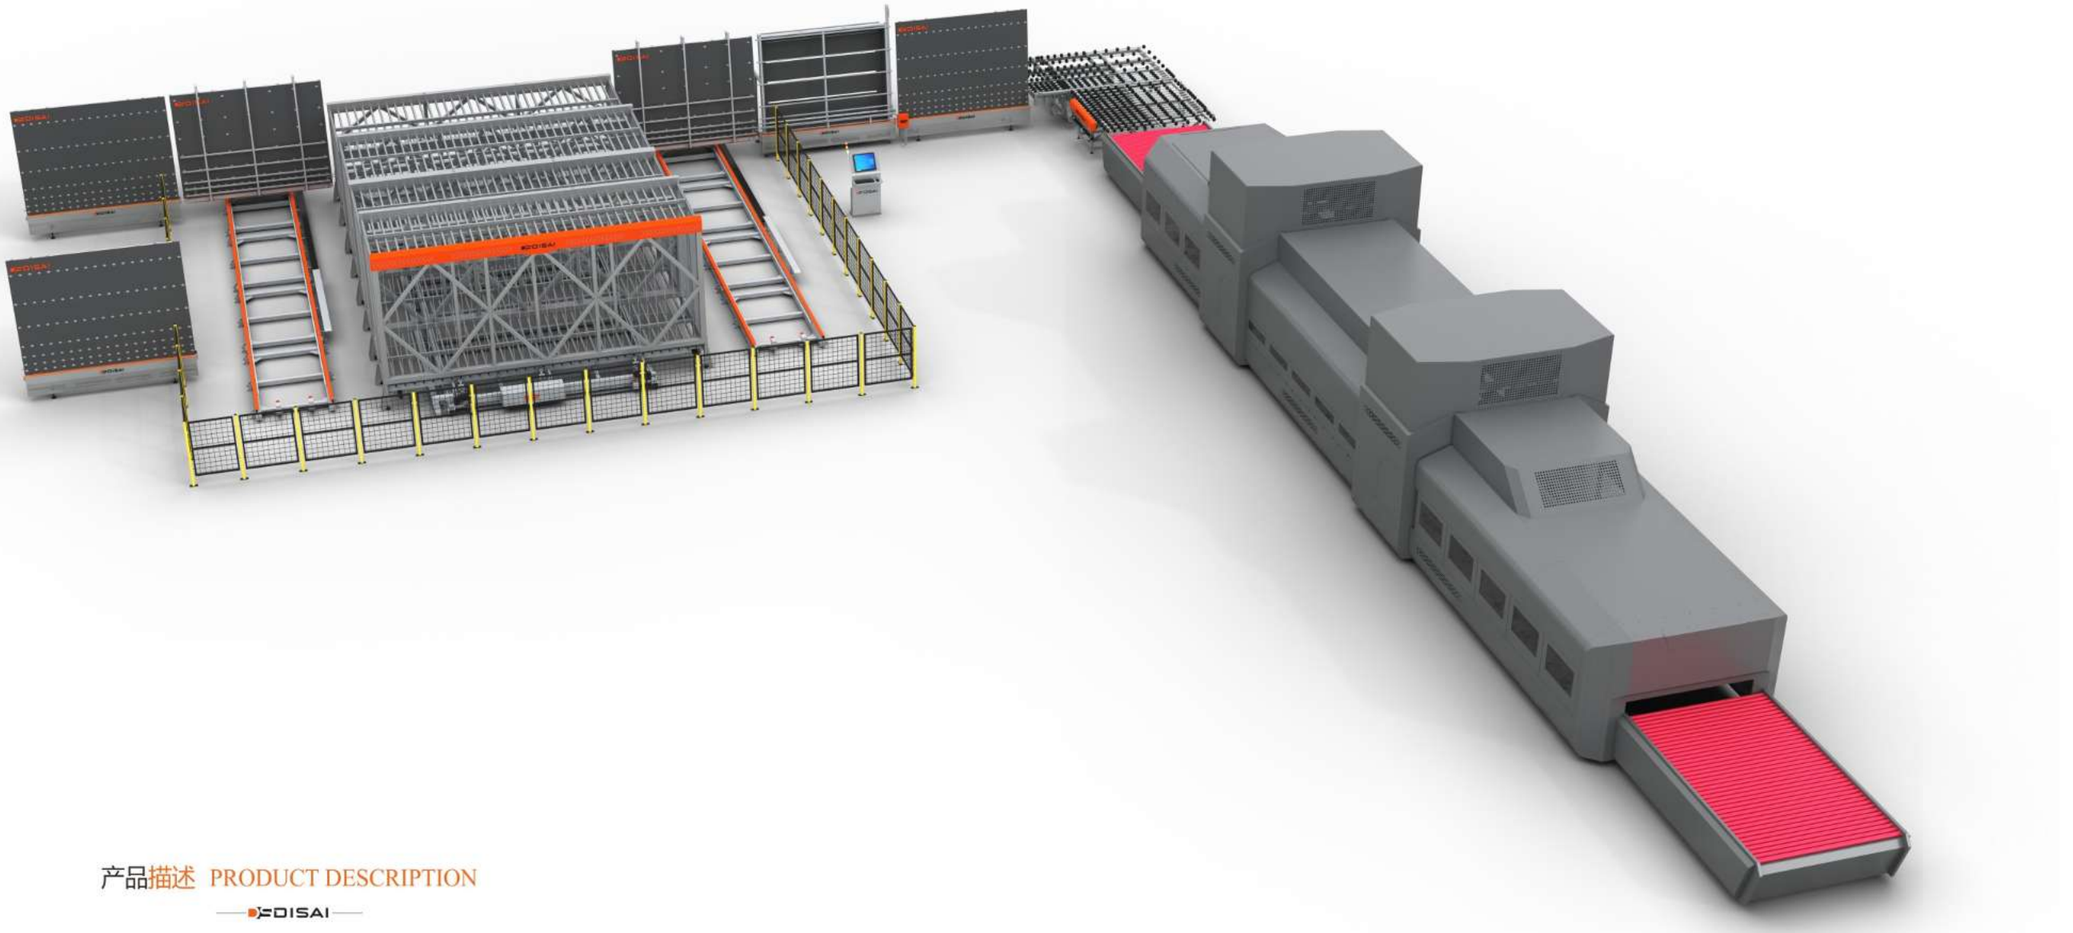

## 产品描述 PRODUCT DESCRIPTION

本系统为玻璃钢化后至中空生产线的全自动智能缓存、识别、配对、供片一体化连线设备，专门解决钢化炉连续出片速度快、规格杂乱、订单分散、中空线节拍不匹配、人工找片配对难、错片混片率高、玻璃划伤、缺片漏片难统计等行业痛点，实现钢化完工玻璃自动入库、智能仓储、自动统计、自动配对、按需精准送片至中空生产线的全流程无人化智能生产。

This system is an integrated connection equipment for intelligent buffering, recognition, matching and glass feeding, which handles tempered glass from the tempering furnace to the insulating glass production line.
It is engineered to tackle common industry pain points: fast continuous glass output from tempering furnaces, mixed glass sizes, scattered orders, cycle time mismatch with insulating glass lines, difficult manual sheet searching and matching, high rate of wrong and mixed sheets, glass scratches, and challenges in tracking missing sheets.
It enables full-process unmanned intelligent production: automatic warehousing of tempered glass, intelligent storage, automatic data counting, automatic sheet matching, and precise on-demand glass feeding to the insulating glass production line.

# 全自动玻璃切割机（三段式）
AUTOMATIC GLASS CUTTING MACHINE(THREE-SECTION)



## 产品描述 PRODUCT DESCRIPTION

高速，高效，高精度!

High speed, high efficiency, high precision!

自动贴标，方便快捷!

Automatic labeling, convenient and fast!

配置高，稳定耐用!

High configuration, stable and durable!





## 产品特点 OUR FEATURES

| 龙门同步双驱<br>结构简单速度快<br>LongMen Synchronous dual drive, simple structure and high speed | 伺服电机<br>直驱齿轮<br>传动简单<br>精度更高<br>The servo motor directly drives the gear, featuring simple transmission and higher precision | 双向切割<br>效率更高<br>Bidirectional cutting higher efficiency | 直线导轨<br>+斜齿条，<br>精度更高更耐用<br>Linear guide rails and helical racks, ensure higher precision, greater durability | 国际知名品牌<br>电气元器件，<br>稳定可靠<br>International well-known brand electrical components, stable and reliable | 工业电脑：<br>防尘、抗电磁<br>干扰、耐高低温<br>Industrial PC: dustproof, EMI-resistant, wide-temperature durable |
|---|---|---|---|---|---|

## 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大加工尺寸 Max Cutting Size | 切割精度 Precision | 切割厚度 Cutting Thickness | 最高切割速度 Max Cutting Speed | 配套上片台型号 Matched Loading Table Model |
|---|---|---|---|---|---|
| DS-CM2621 | 2600×2100 | ±0.15mm | 2-19mm | 180m/min | 均可配1-10工位上片台 All can be equipped with 1 to 10 work stations |
| DS-CM3725 | 3700×2500 | ±0.15mm | 2-19mm | 180m/min | |
| DS-CM4228 | 4200×2800 | ±0.20mm | 2-19mm | 180m/min | |
| DS-CM5133 | 5100×3300 | ±0.25mm | 3-25mm | 180m/min | |
| DS-CM6133 | 6100×3300 | ±0.25mm | 3-25mm | 180m/min | |
| DS-CM7537 | 7500×3700 | ±0.25mm | 5-25mm | 180m/min | |
| DS-CM10037 | 10000×3700 | ±0.25mm | 5-25mm | 180m/min | 只配备双翻单工位上片台 Only equipped with double-turn single-station |
| DS-CM12037 | 12000×3700 | ±0.25mm | 5-25mm | 180m/min | |
| DS-CM16037 | 16000×3700 | ±0.25mm | 5-25mm | 180m/min | |
| DS-CM18037 | 18000×3700 | ±0.25mm | 5-25mm | 180m/min | |

# 全自动（激光打标）玻璃切割机（四段式）

AUTOMATIC(LASER MARKING) GLASS CUTTING MACHINE(FOUR-SECTION)



## 产品描述 PRODUCT DESCRIPTION

DISAI

四段式激光打标玻璃切割机，先打标后切割，一次完成，每块玻璃的完整信息都可以生成二维码雕刻于玻璃表面，为工厂自动化连线提供基础。

The four-section laser marking glass cutting machine marks first and then cuts, completing the process in one go. The complete information of each piece of glass can be generated into a QR code and engraved on the glass surface, providing a foundation for factory automation connections.

## 产品优势 PRODUCT ADVANTAGES

DISAI

- 激光雕刻二维码 整厂监控/ 连线更高效
  Laser engraving of QR codes makes the whole factory monitoring and connection more efficient.
- 自动贴标 可选自动贴标 方便高效
  Optional automatic labeling is available, which is convenient and efficient.
- 龙门同步双驱 结构简单速度快
  LongMen synchronous dual drive, simple structure and high speed
- 伺服电机直驱齿轮 传动简单精度更高
  The servo motor directly drives the gear, featuring simple transmission and higher precision





- 双向切割 效率更高
  Bidirectional cutting higher efficiency
- 直线导轨+斜齿条 精度更高更耐用
  Linear guide rails and helical racks, ensure higher precision, greater durability
- 国际知名品牌 电气元器件， 稳定可靠
  International well-known brand electrical components, stable and reliable
- 工业电脑：防尘、抗电磁干扰、耐高低温
  Industrial PC: dustproof, EMI-resistant, wide-temperature durable

## 产品参数 PRODUCT PARAMETERS

DISAI

| 产品型号 Models | 最大加工尺寸 Max Cutting Size | 切割精度 Precision | 打标位置精度 Marking Position Precision | 切割/打标厚度 Cutting/ Marking Thickness | 最大速度 Max Speed | 打标速度 Marking Speed | 配套上片台型号 Matched Loading Table Model |
|---|---|---|---|---|---|---|---|
| DS-CM2621-LM | 2600×2100 | ±0.15mm | ±0.5mm | 2-19mm | 180m/min | 1S/标准3C符号 1s/standard 3C mark | 均可配1-10工位上片台 All can be equipped with 1 to 10 work stations |
| DS-CM3725-LM | 3700×2500 | ±0.15mm | ±0.5mm | 2-19mm | 180m/min | | |
| DS-CM4228-LM | 4200×2800 | ±0.20mm | ±0.5mm | 2-19mm | 180m/min | | |
| DS-CM5133-LM | 5100×3300 | ±0.25mm | ±0.5mm | 3-25mm | 180m/min | | |
| DS-CM6133-LM | 6100×3300 | ±0.25mm | ±0.5mm | 3-25mm | 180m/min | | |
| DS-CM7537-LM | 7500×3700 | ±0.25mm | ±0.5mm | 5-25mm | 180m/min | | |
| DS-CM10037-LM | 10000×3700 | ±0.25mm | ±0.5mm | 5-25mm | 180m/min | | 只配备双翻单工位上片台 Only equipped with double-turn single-station |
| DS-CM12037-LM | 12000×3700 | ±0.25mm | ±0.5mm | 5-25mm | 180m/min | | |
| DS-CM16037-LM | 16000×3700 | ±0.25mm | ±0.5mm | 5-25mm | 180m/min | | |
| DS-CM18037-LM | 18000×3700 | ±0.25mm | ±0.5mm | 5-25mm | 180m/min | | |

# 全自动（激光打孔）玻璃切割机（四段式）
AUTOMATIC(LASER DRILLING) GLASS CUTTING MACHINE(FOUR-SECTION)



## 产品描述 PRODUCT DESCRIPTION

四段式激光打孔玻璃切割机，先打孔后切割一次完成，省去了打孔需要磨边清洗后二次加工的烦恼，减少生产工序，减少划伤，提高效率，降低成本。

The four-section laser drilling glass cutting machine can complete the drilling and cutting in one go, eliminating the trouble of edge grinding, cleaning and secondary processing after drilling. It reduces production procedures, minimizes scratches, improves efficiency and lowers costs.

## 产品优势 PRODUCT ADVANTAGES

激光打孔集成
在切割工序，
降本增效

Laser drilling integrated into the cutting process reduces costs and increases efficiency.

自动贴标

可选自动贴标
方便高效

Optional automatic labeling is available, which is convenient and efficient.

龙门同步双驱
结构简单速度快

LongMen synchronous dual drive, simple structure and high speed

伺服电机直驱齿轮
传动简单精度更高

The servo motor directly drives the gear, featuring simple transmission and higher precision





双向切割
效率更高

Bidirectional cutting higher efficiency

直线导轨+斜齿条
精度更高更耐用

Linear guide rails and helical racks, ensure higher precision, greater durability

国际知名品牌
电气元器件，
稳定可靠

International well-known brand electrical components, stable and reliable

工业电脑：防尘、
抗电磁干扰、
耐高低温

Industrial PC: dustproof, EMI-resistant, wide-temperature durable

## 产品参数 PRODUCT PARAMETERS

DISAI

| 产品型号 Models | 最大加工尺寸 Max Cutting Size | 切割精度 Precision | 打孔精度 Drilling Precision | 切割/打孔厚度 Cutting/Punching Thickness | 最大切割速度 Max Speed | 打孔速度 Drilling Speed | 激光器功率 Laser Power | 配套上片台型号 Matched Loading Table Model |
|---|---|---|---|---|---|---|---|---|
| DS-CM2621-LD | 2600×2100 | ±0.15mm | ±0.1mm | 2-10mm | 180m/min | 5mm白玻/40mm孔/约15秒<br>5mm clear glass/Ø40mm hole/~15s | 120W | 均可配1-10工位上片台<br>All can be equipped with 1 to 10 work stations |
| DS-CM3725-LD | 3700×2500 | ±0.15mm | ±0.1mm | 2-10mm | 180m/min | | 120W | |
| DS-CM4228-LD | 4200×2800 | ±0.2mm | ±0.1mm | 2-10mm | 180m/min | | 120W | |
| DS-CM5133-LD | 5100×3300 | ±0.25mm | ±0.1mm | 3-10mm | 180m/min | | 120W | |
| DS-CM6133-LD | 6100×3300 | ±0.25mm | ±0.1mm | 3-10mm | 180m/min | | 120W | |
| DS-CM7537-LD | 7500×3700 | ±0.25mm | ±0.1mm | 5-10mm | 180m/min | | 120W | |
| DS-CM10037-LD | 10000×3700 | ±0.25mm | ±0.1mm | 5-10mm | 180m/min | | 120W | 只配备双翻单工位上片台<br>Only equipped withdouble-turn single-station |
| DS-CM12037-LD | 12000×3700 | ±0.25mm | ±0.1mm | 5-10mm | 180m/min | | 120W | |
| DS-CM16037-LD | 16000×3700 | ±0.25mm | ±0.1mm | 5-10mm | 180m/min | | 120W | |
| DS-CM18037-LD | 18000×3700 | ±0.25mm | ±0.1mm | 5-10mm | 180m/min | | 120W | |

## 全自动激光打标机（单头）
AUTOMATIC LASER MARKING MACHINE(SINGLE LASER)




### 产品优势 PRODUCT ADVANTAGES

1、高品质激光发生器，打码速度快。
2、打码等级高（AIM DPM/B级标准以上）。
3、打码位置精度高（小于0.5mm）。
4、可打码内容丰富，3C、客户定制LOGO、条形码、二维码、汉字、字模等均可以。
5、读码准确率高，在40–50米/分钟移动速度下，读取率为99.9%。
6、可自行设定打码位置，方便中空配对。
7、产品可永久追溯，并具备防伪功能。

1.High-quality laser generator, fast coding speed.
2.Higher coding level (above AIM DPM/B standard).
3.Higher marking position accuracy (less than 0.5mm).
4.Rich encoded content , including 3C products, customer-customized logos, bar codes, QR codes, Chinese characters, font patterns, etc.
5.The code reading accuracy rate is high. At a moving speed of 40-50 meters per minute, the reading rate is 99.9%.
6.The coding position can be set by yourself, which is convenient for insulating pairing.
7.The product is permanently traceable and has anti-counterfeiting functions.

### 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大加工尺寸 Max Glass Size | 打标位置精度 Marking Position Precision | 打标速度 Marking Speed | 激光器功率 Laser Power | 标刻深度 Marking Depth |
|---|---|---|---|---|---|
| DS–LM2621 | 2600×2100 | <0.5mm | 1S/标准3C符号 1s/standard 3C mark | 15W/20W/25W | 0.1–0.15mm |
| DS–LM3725 | 3700×2500 | <0.5mm | | 15W/20W/25W | 0.1–0.15mm |
| DS–LM4228 | 4200×2800 | <0.5mm | | 15W/20W/25W | 0.1–0.15mm |
| DS–LM5133 | 5100×3300 | <0.5mm | | 15W/20W/25W | 0.1–0.15mm |
| DS–LM6133 | 6100×3300 | <0.5mm | | 15W/20W/25W | 0.1–0.15mm |





## 全自动激光打标机（双头）
AUTOMATIC LASER MARKING MACHINE(DOUBLE LASER)




### 产品优势 PRODUCT ADVANTAGES

1、双激光同时打标，打码速度更快。
2、打码等级高（AIM DPM/B级标准以上）。
3、打码位置精度高（小于0.5mm）。
4、可打码内容丰富，3C、客户定制LOGO、条形码、二维码、汉字、字模等均可以 。
5、读码准确率高，在40–50米/分钟移动速度下，读取率为99.9%。
6、可自行设定打码位置，方便中空配对。
7、产品可永久追溯，并具备防伪功能。

1. Dual lasers mark at the same time, making the coding speed faster.
2. Higher coding level (above AIM DPM/B standard).
3. Higher marking position accuracy (less than 0.5mm).
4. Rich encoded content , including 3C products, customer-customized logos, bar codes, QR codes, Chinese characters, font patterns, etc.
5. The code reading accuracy rate is high. At a moving speed of 40-50 meters per minute, the reading rate is 99.9%.
6. The coding position can be set by yourself, which is convenient for insulating pairing.
7. The product is permanently traceable and has anti-counterfeiting functions.

### 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大加工尺寸 Max Glass Size | 打标位置精度 Marking Position Precision | 打标速度 Marking Speed | 激光器功率 Laser Power | 标刻深度 Marking Depth |
|---|---|---|---|---|---|
| DS–LM2621–2 | 2600×2100 | <0.5mm | 1S/标准3C符号 1s/standard 3C mark | 15W/20W/25W | 0.1–0.15mm |
| DS–LM3725–2 | 3700×2500 | <0.5mm | | 15W/20W/25W | 0.1–0.15mm |
| DS–LM4228–2 | 4200×2800 | <0.5mm | | 15W/20W/25W | 0.1–0.15mm |
| DS–LM5133–2 | 5100×3300 | <0.5mm | | 15W/20W/25W | 0.1–0.15mm |
| DS–LM6133–2 | 6100×3300 | <0.5mm | | 15W/20W/25W | 0.1–0.15mm |

## 全自动激光打孔机（单头）
AUTOMATIC LASER DRILLING MACHINE(SINGLE LASER)



### 产品优势 PRODUCT ADVANTAGES

1、使用180瓦MOPA激光器，打孔速度快。
2、打孔尺寸准确，爆边更小。
3、打孔无锥度，表面光滑。
4、各种形状的孔类均可实现打孔 。

1.It uses a 180W MOPA laser and has a fast drilling speed.
2.The hole size is accurate and has less edge explosion.
3.The holes have no taper and the surface is smooth.
4.Holes of all shapes can be drilled.

### 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大加工尺寸 Max Glass Size | 打孔玻璃厚度 Drilling Thickness | 打孔速度 Drilling Speed | 激光器功率 Laser Power |
|---|---|---|---|---|
| DS-LD2621-CP | 2600×2100 | 2-10mm | 5mm 白玻/40mm孔/约12秒 5mm clear glass/Ø40mm hole/~12s | 180W MOPA |
| DS-LD3725-CP | 3700×2500 | 3-10mm | | 180W MOPA |
| DS-LD4228-CP | 4200×2800 | 3-10mm | | 180W MOPA |
| DS-LD5133-CP | 5100×3300 | 5-10mm | | 180W MOPA |
| DS-LD6133-CP | 6100×3300 | 5-10mm | | 180W MOPA |





## 全自动激光打孔机（双头）
AUTOMATIC LASER DRILLING MACHINE(DOUBLE LASER)



### 产品优势 PRODUCT ADVANTAGES

1、双激光打孔系统同时工作，速度翻倍。
2、使用180瓦MOPA激光器，打孔速度快。
3、打孔尺寸准确，爆边更小。
4、打孔无锥度，表面光滑。
5、各种形状的孔类均可实现打孔 。

1.The dual laser drilling systems work at the same time, doubling the speed.
2.It uses a 180W MOPA laser and has a fast drilling speed.
3.The hole size is accurate and has less edge explosion.
4.The holes have no taper and the surface is smooth.
5.Holes of all shapes can be drilled.

### 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大加工尺寸 Max Glass Size | 打孔玻璃厚度 Drilling Thickness | 打孔速度 Drilling Speed | 激光器功率 Laser Power |
|---|---|---|---|---|
| DS-LD2621-2-CP | 2600×2100 | 2-10mm | 5mm 白玻/40mm孔/约12秒 5mm clear glass/Ø40mm hole/~12s | 180W MOPA |
| DS-LD3725-2-CP | 3700×2500 | 3-10mm | | 180W MOPA |
| DS-LD4228-2-CP | 4200×2800 | 3-10mm | | 180W MOPA |
| DS-LD5133-2-CP | 5100×3300 | 5-10mm | | 180W MOPA |
| DS-LD6133-2-CP | 6100×3300 | 5-10mm | | 180W MOPA |

## 全自动玻璃激光打孔打砂机
AUTOMATIC GLASS LASER DRILLING AND SANDBLASTING MACHINE




### 产品优势 PRODUCT ADVANTAGES

1.控制激光束的能量和焦点位置，可实现打孔/打砂/除膜/除漆/打标。
2.激光无接触加工，低损耗、无崩边、成品率高。
3.适合制造高端定制的智能浴室镜。
4.支持复杂图形输入输出。

1.By controlling laser energy and focus position, it realizes drilling, sandblasting, film removal, paint removal and marking.
2.Non-contact laser processing, low loss, no chipping, high yield.
3.Ideal for manufacturing high-end custom intelligent bathroom mirrors.
4.Supports input and output of complex graphics.

### 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大加工尺寸 Max Glass Size | 可选功能 Optional Function | 打孔速度 Drilling Speed | 激光器功率 Laser Power | 玻璃类型 Glass Type |
|---|---|---|---|---|---|
| DS-LD1810-SB | 1800×1000mm | 单头/独立使用/打孔/打砂/除膜/除漆/打标 Single head / Standalone / Drilling/Sandblasting / Film removal / Paint removal / Marking | 5mm白玻/20mm孔/约5秒 5mm clear glass/ Ø20mm hole/~5s | 120W/180W MOPA | 建筑玻璃（白玻/LOW-E） Architectural Glass (Clear Glass, Low-E Glass) |
| DS-LD2513-SB | 2500×1300mm | | | | |
| DS-LD3020-SB | 3000×2000mm | | | | |





## 翻转式玻璃切割台
TILTING GLASS CUTTING TABLE



### 产品特点 OUR FEATURES

- 极其坚固的结构设计 Extremely robust structural design
- 自动切割压力调节 Automatic cutting pressure regulation
- 高级形状编辑器 Advanced shapes editor
- 玻璃优化软件 Glass optimization software
- 远程技术援助 Remote technical assistance
- 全自动贴标系统 Automatic labeling system

### 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大加工尺寸 Max Cutting Size | 玻璃厚度 Glass Thickness | 最大玻璃切割速度 Max Glass Cutting Speed | 切割精度 Precision |
|---|---|---|---|---|
| DS-TCT2621 | 2600×2100mm | 3-19mm | 160m/min | ±0.20mm |
| DS-TCT3826 | 3800×2600mm | 3-19mm | 160m/min | ±0.20mm |
| DS-TCT6133 | 6100×3300mm | 3-19mm | 160m/min | ±0.25mm |

## 一体式玻璃切割台（自动上片）
INTEGRATED GLASS CUTTING TABLE(AUTOMATIC LOADING)



### 产品特点 OUR FEATURES

| 操作 简单安全 Simple and safe operation | 占地 面积小 Cover a small area | 切割 速度快 Fast cutting speed | 切割 精度高 High cutting precision | 性能稳定 Stable performance | 功能齐全 Complete functions |
|---|---|---|---|---|---|

### 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大加工尺寸 Max Cutting Size | 玻璃厚度 Glass Thickness | 最大玻璃切割速度 Max Glass Cutting Speed | 切割精度 Precision | 上片速度 Loading Speed |
|---|---|---|---|---|---|
| DS-ICT2621-A | 2600×2100mm | 3-19mm | 160m/min | ±0.20mm | 40~50s |
| DS-ICT3826-A | 3800×2650mm | 3-19mm | 160m/min | ±0.20mm | 40~50s |





## 一体式玻璃切割台（辅助上片）
INTEGRATED GLASS CUTTING TABLE(MANUAL LOADING)




### 产品特点 OUR FEATURES

| 操作 简单安全 Simple and safe operation | 占地 面积小 Cover a small area | 切割 速度快 Fast cutting speed | 切割 精度高 High cutting precision | 性能稳定 Stable performance | 功能齐全 Complete functions |
|---|---|---|---|---|---|

### 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大加工尺寸 Max Cutting Size | 玻璃厚度 Glass Thickness | 最大玻璃切割速度 Max Glass Cutting Speed | 切割精度 Precision | 上片速度 Loading Speed |
|---|---|---|---|---|---|
| DS-ICT2621-J | 2600×2100mm | 3-19mm | 160m/min | ±0.20mm | 40~50s |
| DS-ICT3826-J | 3800×2650mm | 3-19mm | 160m/min | ±0.20mm | 40~50s |

# 智能玻璃缓存与理片系统
INTELLIGENT GLASS BUFFERING AND SORTING SYSTEM

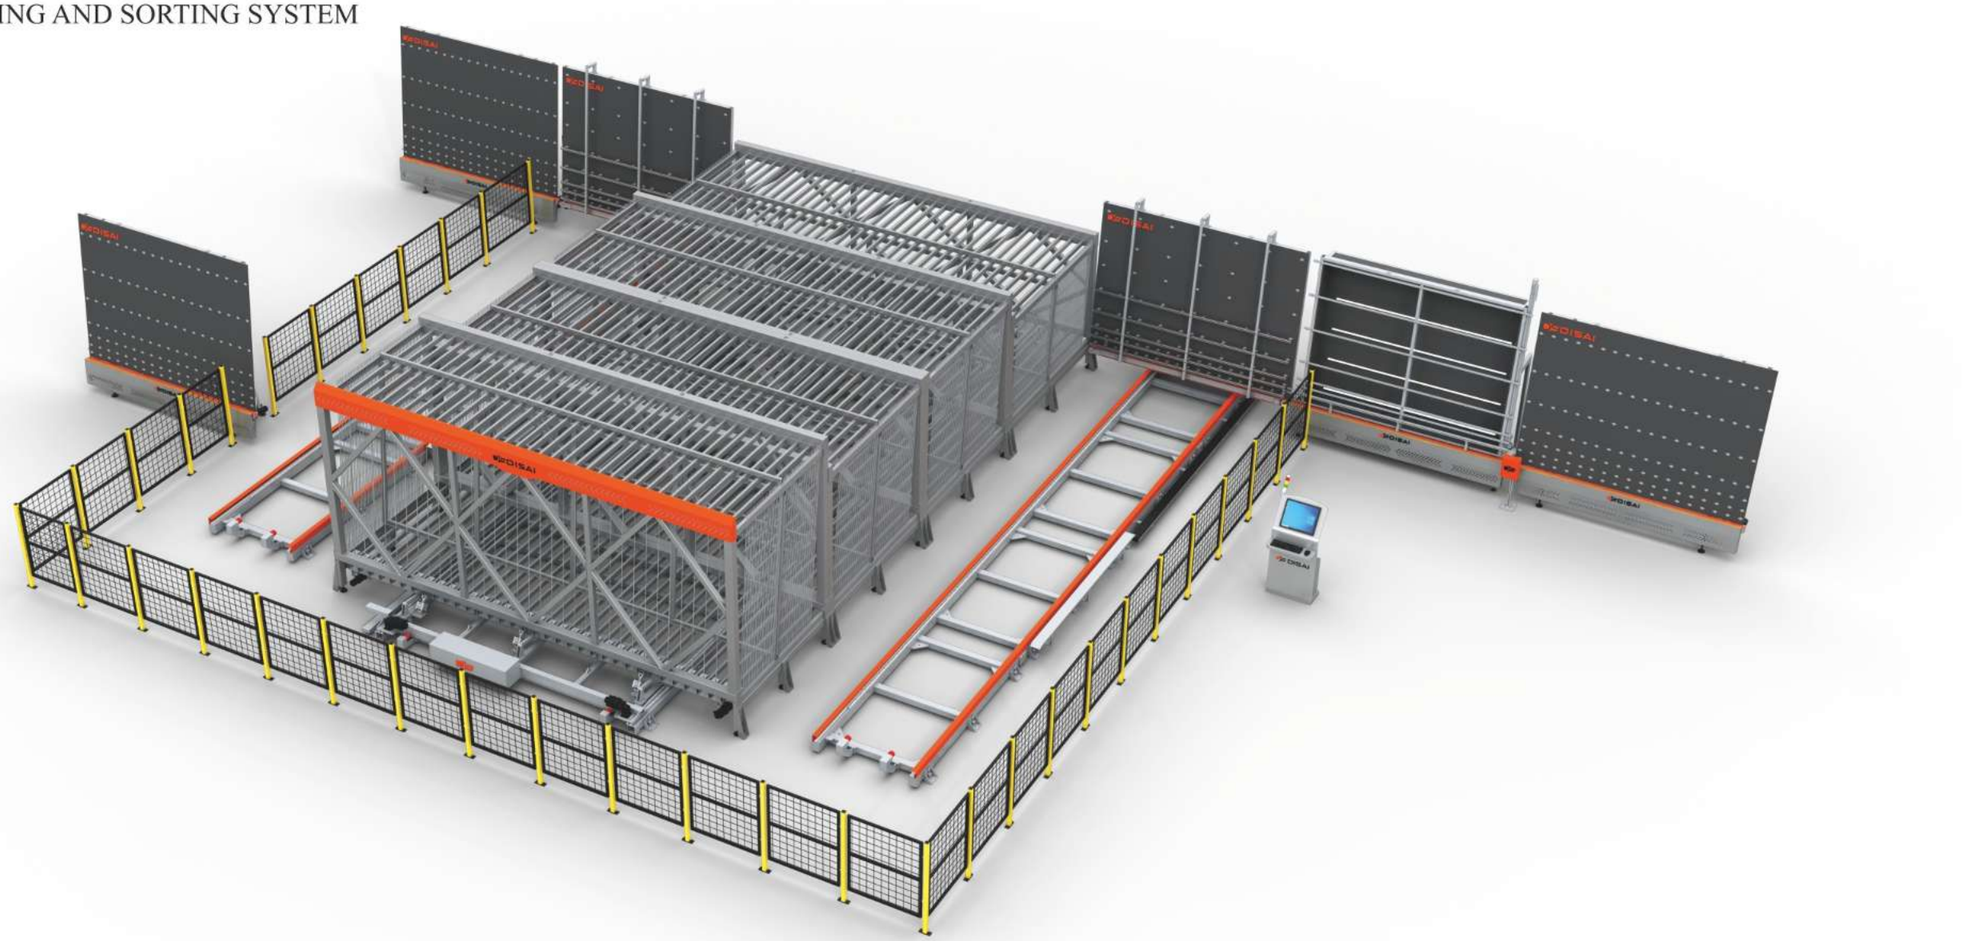

## 产品描述 PRODUCT DESCRIPTION

本系统为玻璃钢化后至中空生产线的全自动智能缓存、识别、配对、供片一体化连线设备，专门解决钢化炉连续出片速度快、规格杂乱、订单分散、中空线节拍不匹配、人工找片配对难、错片混片率高、玻璃划伤、缺片漏片难统计等行业痛点，实现钢化完工玻璃自动入库、智能仓储、自动统计、自动配对、按需精准送片至中空生产线的全流程无人化智能生产。

This system is an integrated connection equipment for intelligent buffering, recognition, matching and glass feeding, which handles tempered glass from the tempering furnace to the insulating glass production line.

It is engineered to tackle common industry pain points: fast continuous glass output from tempering furnaces, mixed glass sizes, scattered orders, cycle time mismatch with insulating glass lines, difficult manual sheet searching and matching, high rate of wrong and mixed sheets, glass scratches, and challenges in tracking missing sheets.

It enables full-process unmanned intelligent production: automatic warehousing of tempered glass, intelligent storage, automatic data counting, automatic sheet matching, and precise on-demand glass feeding to the insulating glass production line.

# 中空立式理片系统
INTELLIGENT VERTICAL SORTING MACHINE



## 产品描述 PRODUCT DESCRIPTION

1.把散乱的玻璃输入巷道，快速精准检测、系统智能比对优化，按理架模式规则出片。
2.取代人工配片和贴标撕标环节，提高生产效率；
3.支持工单扫描，读取ERP数据进行比对;
4.单架理片时，当上片玻璃为下片玻璃时直通，不用存储于网格内，允许连续入片。

1.Put the scattering glasses into path; fast and precise inspection and system intelligent comparision and optimization; receive films based on the rack mode.
2.Replacing artificial film matching and label pasting and removing to improve production efficiency;
3.Supporting work ticket scanning and reading ERP date for comparison
4.It is directly connected when film is sorted with single rack and the upper glass is also the lower one; it will not be saved in net grid; continuous film sending allowed.

## 组成 COMPOSITION

立式输送台（手动/自动上片台）+立式检测台+移动网架+立式输送台（手动/自动下片）
Vertical transfer platform(manual/auto loading)+vertical detection bench + mobile net rack +vertical transfer platform (manual/auto unloading)





## 使用范围 SCOPE OF APPLICABILITY


**配对模式：**适用于中空前在线使用，把两架需要配对的不同玻璃送进理架系统，按工单要求顺序配对好出片；
**顺序模式：**适用于中空前离线使用，把单架需要配对的不同玻璃送进理架系统，按工单顺序出片；
**效率模式：**适用于磨边前或彩釉前离线使用，按小批量整单及大小顺序出片，以散化整，减少磨边开合次数，提升磨边效率的1-3倍。

Pairing mode: Applicable to online use prior to insulating glass line;send different glasses in need of repairing for two racks into rack sorting system; the pieces will be sent out after well repaired based on the sequence in work ticket in order;
Sequence mode: Applicable to offline prior to insulating glass; send different glasses in neeed of repairing of single rack to rack sorting system; the pieces will be sent out based on sequence in work ticket.
Efficiency mode: Applicable to offline use prior to edge grinding or glazing; send out pieces based on the whole small batch of orders and size; the scattering ones will be integrated to reduce the edge grinding times; the edge grinding efficiency can be 1-3 times higher than previously.

## 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 加工玻璃厚度 Thickness of Processed Glass | 最小玻璃尺寸 Min Glass Size | 最大加工尺寸 Max Glass Size | 平均理片效率 Average Glass Piece Efficiency |
|---|---|---|---|---|
| DS-LP-V2520 | 3-8mm | 400×400mm | 2500x2000mm | 5片/分 5 pcs/min |
| DS-LP-V3025 | 3-8mm | 400×400mm | 3000x2500mm | 5片/分 5 pcs/min |
| DS-LP-V3525 | 3-8mm | 400×400mm | 3500x2500mm | 5片/分 5 pcs/min |
| DS-LP-V6025 | 3-8mm | 400×400mm | 6000x2500mm | 5片/分 5 pcs/min |

# 抽屉式智能原片仓储系统
DRAWER-TYPE INTELLIGENT GLASS SHEET STORAGE SYSTEM

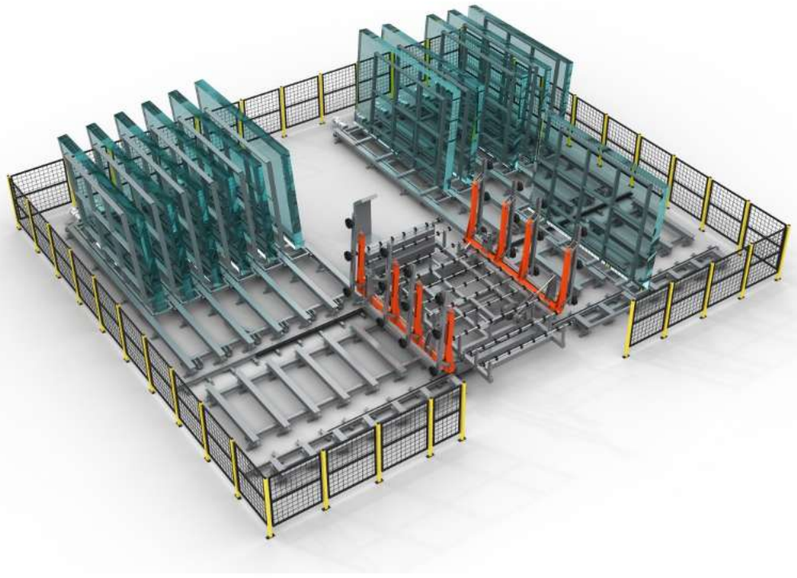


## 产品描述 PRODUCT DESCRIPTION

迪赛穿梭车式玻璃原片仓储系统由穿梭车、玻璃架、仓储架位、上片位、补片位、防护栏及控制系统7部分组成。穿梭系统的设计适用于供给多条切割线上片，通过穿梭车X和Y两个方向的移动，全自动实现玻璃架的入库、出库、上架、换架等操作。玻璃的尺寸、厚度、膜系等相关信息录入到资料库后，仓储库存区数据与总控中心数据同步并共享，实现信息的实时更新。

The DISAI shuttle-type intelligent glass sheet storage system consists of 7 parts: shuttle car, glass rack, storage rack, film loading position, patch position, guardrail and control system. The design of the shuttle system is suitable for supplying multiple pieces of cutting line, and through the movement of the shuttle in the X and Y directions, the glass racks can be automatically loaded into, out of storage, loaded, and changed. After the glass size, thickness, film system and other related information are entered into the database, the data in the warehouse inventory area is synchronized and shared with the data in the general control center to realize real-time update of information.





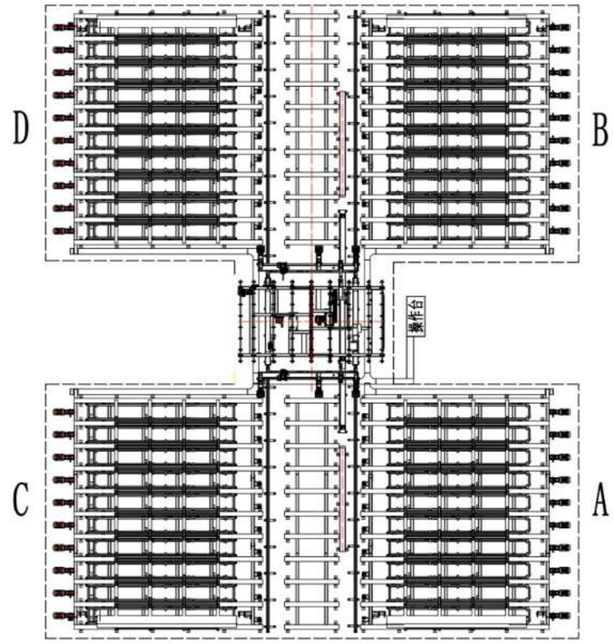


## 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大玻璃尺寸 Max Glass Size | 单架最大负载 Max Load Per Rack | 移动速度 Travel Speed | 玻璃架深度 Glass Rack Depth |
|---|---|---|---|---|
| DS-DR-ISS4228-10AB | 4200mm×2800mm | 7000KG | 15m/min | 430mm |
| DS-DR-ISS5133-10AB | 5100mm×3300mm | 7000KG | 15m/min | 430mm |
| DS-DR-ISS6133-10AB | 6100mm×3300mm | 7000KG | 15m/min | 430mm |

备注:型号后缀“10AB”：“10”代表单边玻璃架数量；“A/B”代表摆放位置（共A/B/C/D四个方位可选）。

Remarks:Model suffix "10AB": "10" indicates racks per side; "A/B" indicate positions (options: A/B/C/D).

# 穿梭车式智能原片仓储系统
SHUTTLE-TYPE INTELLIGENT GLASS SHEET STORAGE SYSTEM



## 产品描述 PRODUCT DESCRIPTION

迪赛穿梭车式智能原片仓储系统由穿梭车、玻璃存储架、仓储架位、上片工位、补片工位、安全护栏及智能控制系统组成。


系统可为多条玻璃切割线供料。穿梭车通过X/Y双向移动，完成玻璃架入库、出库、换架及物料调度。

录入玻璃规格、厚度和膜层类型后，库存数据可与工厂控制中心同步，实现数字化库存管理。

The DISAI Shuttle-Type Intelligent Glass Sheet Storage System integrates shuttle vehicles, glass storage racks, storage locations, loading stations, replenishment stations, safety guardrails and an intelligent control system.
The system supplies raw glass sheets to multiple cutting lines. With X/Y bidirectional movement, the shuttle vehicle performs rack in/out, rack exchange and material scheduling.
Glass size, thickness and coating data can be entered into the system and synchronized with the factory control center for digital inventory management.





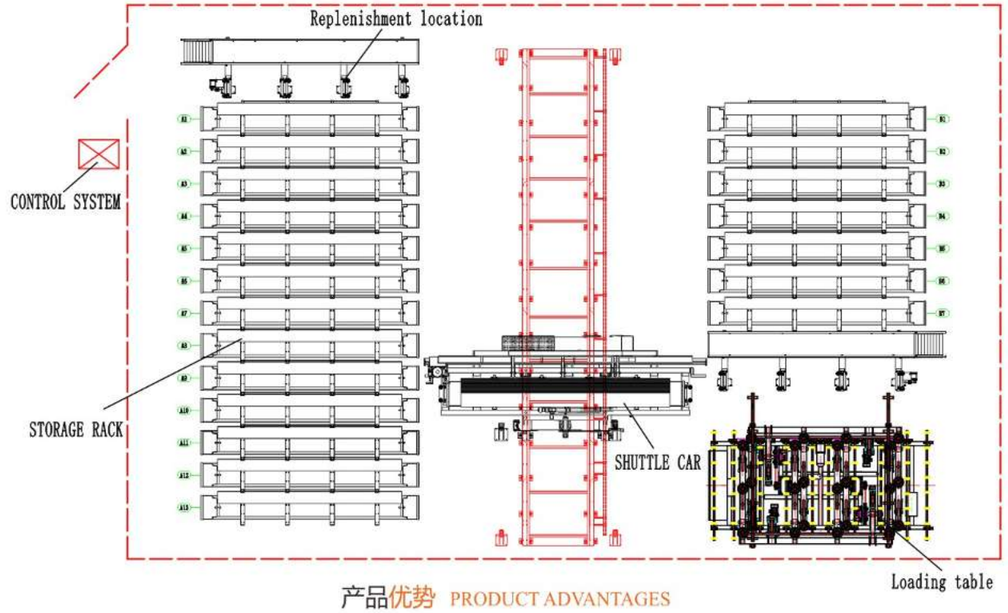


## 产品优势 PRODUCT ADVANTAGES

| 密集式货架布局 | 多条切割线供料 | X/Y双向移动 | 玻璃架智能调度 | 数字化库存管理 | 安全护栏与智能控制 |
|---|---|---|---|---|---|
| Dense rack layout | Supply for multiple cutting lines | X/Y bidirectional movement | Intelligent rack scheduling | Digital inventory management | Safety guardrails and intelligent control |

## 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大玻璃尺寸 Max Glass Size | 单架最大负载 Max Load Per Rack | 玻璃架拉取速度 Glass Rack Extraction Speed Max Speed | 穿梭车移动速度 Shuttle Car Travel Speed | 玻璃架深度 Glass Rack Depth |
|---|---|---|---|---|---|
| DS-SH-ISS4228-20S/D | 4200mm×2800mm | 7000KG | 15m/min | 15-30 m/min | 330mm |
| DS-SH-ISS5133-20S/D | 5100mm×3300mm | 7000KG | 15m/min | 15-30 m/min | 330mm |
| DS-SH-ISS6133-20S/D | 6100mm×3300mm | 7000KG | 15m/min | 15-30 m/min | 330mm |

备注:型号后缀“20S/D” “20”=玻璃架数量，“S”=穿梭车单向拉取，“D”=穿梭车双向拉取。

Remarks:Model Suffix "20S/D": "20" indicates the number of glass racks; "S" for single-direction shuttle retrieval, "D" for bidirectional shuttle retrieval.

## 智能移动玻璃仓储架
INTELLIGENT MOBILE GLASS STORAGE RACK



### 产品优势 PRODUCT ADVANTAGES

1.集中管理整包玻璃原片。
2.自动手动双模式控制。
3.仓储空间利用率提升3倍。
4.防倒结构设计更安全。
5.架位尺寸按需定制。

1.Centralized storage for full glass packs.
2.Dual operation modes: automatic & manual.
3.Triples warehouse space utilization.
4.Anti-tilt design for enhanced safety.
5.Rack quantity and dimensions can be customized to your needs.

### 产品参数 PRODUCT PARAMETERS


| 产品型号 Models | 最大加工尺寸 Max Glass Size | 架数量 Rack Quantity | 总长度 Total Length |
|---|---|---|---|
| DS-CGR2621-X | 2600×2100mm | 10-80架可选 10-80 glass racks optional | 5.7-31m |
| DS-CGR4228-X | 4200×2800mm | 10-80架可选 10-80 glass racks optional | 5.7-31m |
| DS-CGR6133-X | 6100×3300mm | 10-50架可选 10-50 glass racks optional | 6.3-24m |

（X代表玻璃架数量）
（X represents the number of glass rack）





## 智能搬运机械臂
INTELLIGENT CARRYING ROBOT ARM

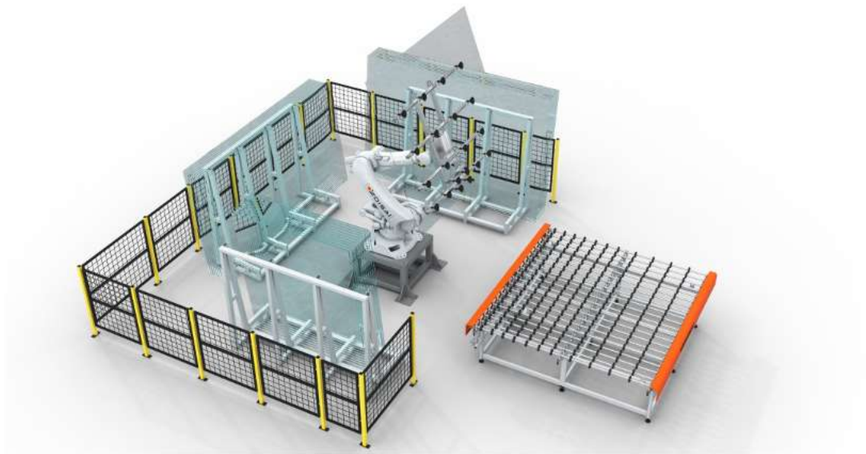


### 产品优势 PRODUCT ADVANTAGES

1.实现自动上下料，减少人工，降低废品率。
2.高速伺服驱动，稳定性好，定位精度高，生产效率高。
3.自动分架，减少划伤，灵活性高。
4.占地面积小，稳定可靠。

1. Automatic loading and unloading reduces labor and lowers reject rates.
2. High-speed servo drive delivers good stability, high positioning accuracy and superior production efficiency.
3. Automatic rack separation, reduces scratches, high flexibility.
4. Compact footprint with stable and reliable operation.

### 产品参数 PRODUCT PARAMETERS

| 产品型号 Models | 最大负载 Max Load | 最大臂展 Max Reach | 下片速度 Unloading Speed | 备注 Remarks |
|---|---|---|---|---|
| DS-RB300-2700-CA | 300KG | 2700mm | 4-5 pcs/min | 搬运/下片/分架 Carrying / Unloading / Rack Separation |
| DS-RB245-3100-CA | 245KG | 3100mm | 4-5 pcs/min | |
| DS-RB220-2700-CA | 220KG | 2700mm | 4-5 pcs/min | |
| DS-RB170-2700-CA | 170KG | 2700mm | 4-5 pcs/min | |
| DS-RB130-3100-CA | 130KG | 3100mm | 4-5 pcs/min | |
| DS-RB80-2100-CA | 80KG | 2100mm | 5-7 pcs/min | |
| DS-RB50-2100-CA | 50KG | 2100mm | 5-7 pcs/min | |
| DS-RB30-1850-CA | 30KG | 1850mm | 5-7 pcs/min | |

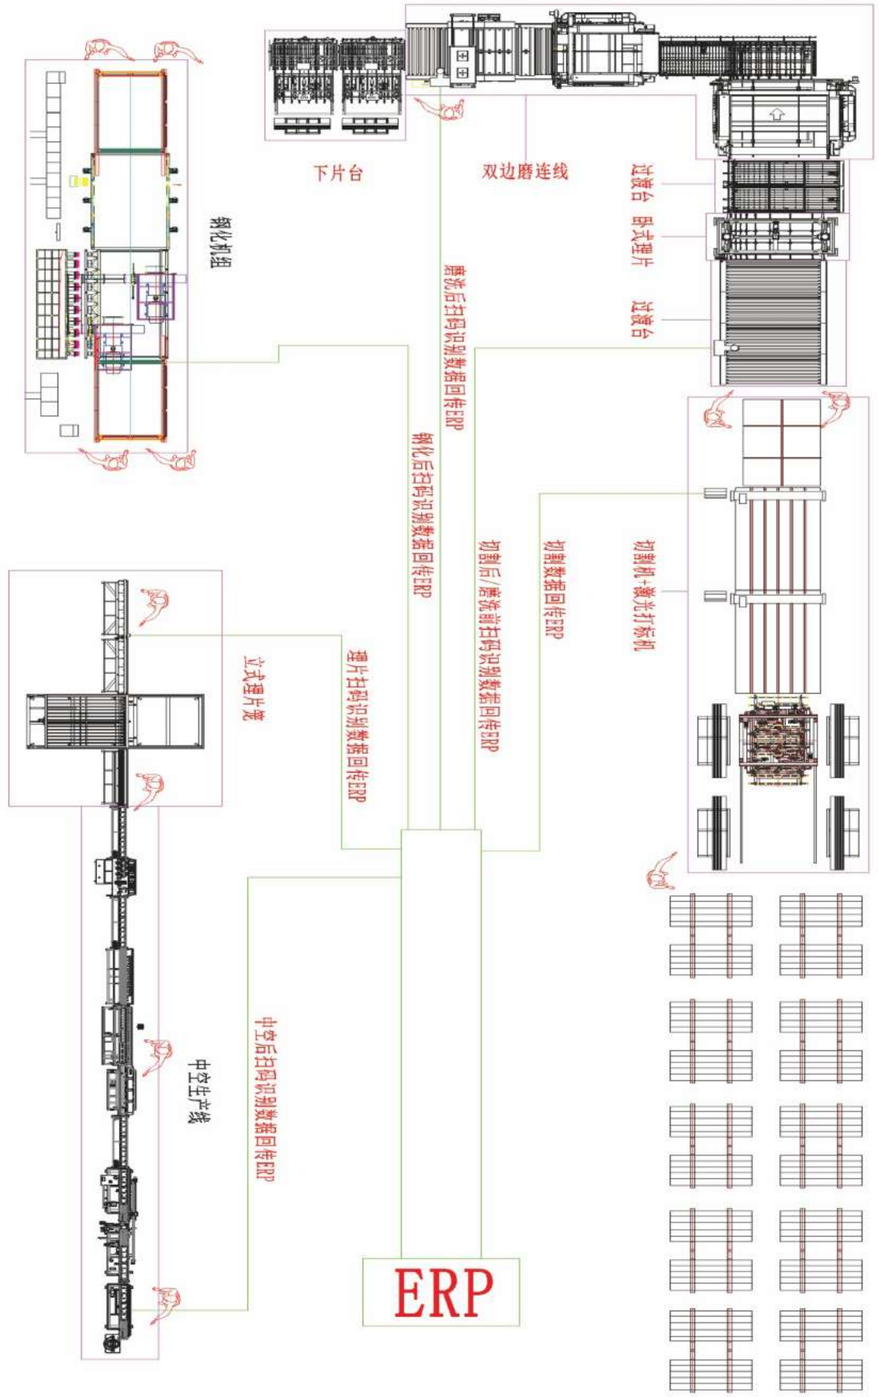


玻璃厂自动化示意图





# 迪赛玻璃深加工ERP管理软件
GLASS DEEP PROCESSING ERP MANAGEMENT SOFTWARE


## 产品描述 PRODUCT DESCRIPTION

销售管理
系统采用图形化的导航界面，客户端无需安装即可快速完成日常贸易管理中的接单、排产、发货、收款等操作。

Sales management
The system adopts a graphical navigation interface, and the client can quickly complete operations such as order receiving, production scheduling, delivery, and payment collection in daily trade management without installation.



生产管理
配合自主研发的手机应用程序（APP），替代手工完工操作。生产人员生产完成后，使用手机等智能设备扫描流程卡上的二维码，即可自动完成完工操作。

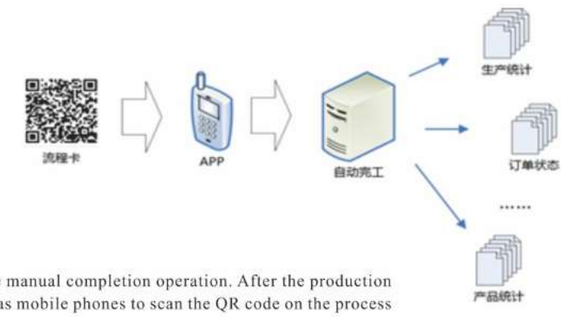


Production management
With the self-developed mobile application (APP), it can replace the manual completion operation. After the production personnel complete the production, they can use smart devices such as mobile phones to scan the QR code on the process card to automatically complete the completion operation.

统计功能
系统配备了多种方便实用的统计功能，能帮助管理者实时了解订单、生成、发货、收款、客户及库存情况，为后续决策提供数据支撑。

Statistical function
The system is equipped with a variety of convenient and practical statistical functions, which can help managers understand the status of orders, production, delivery, collection, customers and inventory in real time, and provide data support for subsequent decision-making.

## 无论您有任何需求，我们都竭诚为您服务
## AFTER-SALES & TECHNICAL SUPPORT

1. 设备安装、调试及验收服务
为客户提供设备安装、调试、试生产、操作培训、理论知识培训及常见故障排查指导等服务。
设备到达客户现场后，安排工程师进行设备安装与调试，并提供基础操作培训，协助客户掌握设备的操作方法、日常使用及维护要点，确保设备正常投入使用。
2. 设备维修服务
针对设备在使用过程中出现的故障，为客户提供设备检修、维修、维护、配件更换及技术咨询等服务，协助客户保持设备稳定运行。
3. 设备技术方案设计及咨询服务
根据客户的生产情况、玻璃类型、加工工艺、设备配置及厂房条件，为客户提供设备选型、技术方案设计、生产线布局规划及相关咨询服务。

1. Installation and Commissioning
DISAI provides installation and commissioning support, together with operator training and basic troubleshooting guidance. Our engineers help customers understand daily operation and routine maintenance.


2. Maintenance and Spare Parts
Maintenance support, technical consultation and spare-parts services are available to support stable equipment operation. We assist customers with practical service coordination throughout the equipment lifecycle.

3. Technical Solutions and Consulting
Our team provides equipment selection, layout planning and technical consulting for glass-processing projects. We support clear process connection between equipment and production flow.



**售后服务**
AFTER-SALES SERVICE

## 创新成果
## INNOVATION OUTCOMES

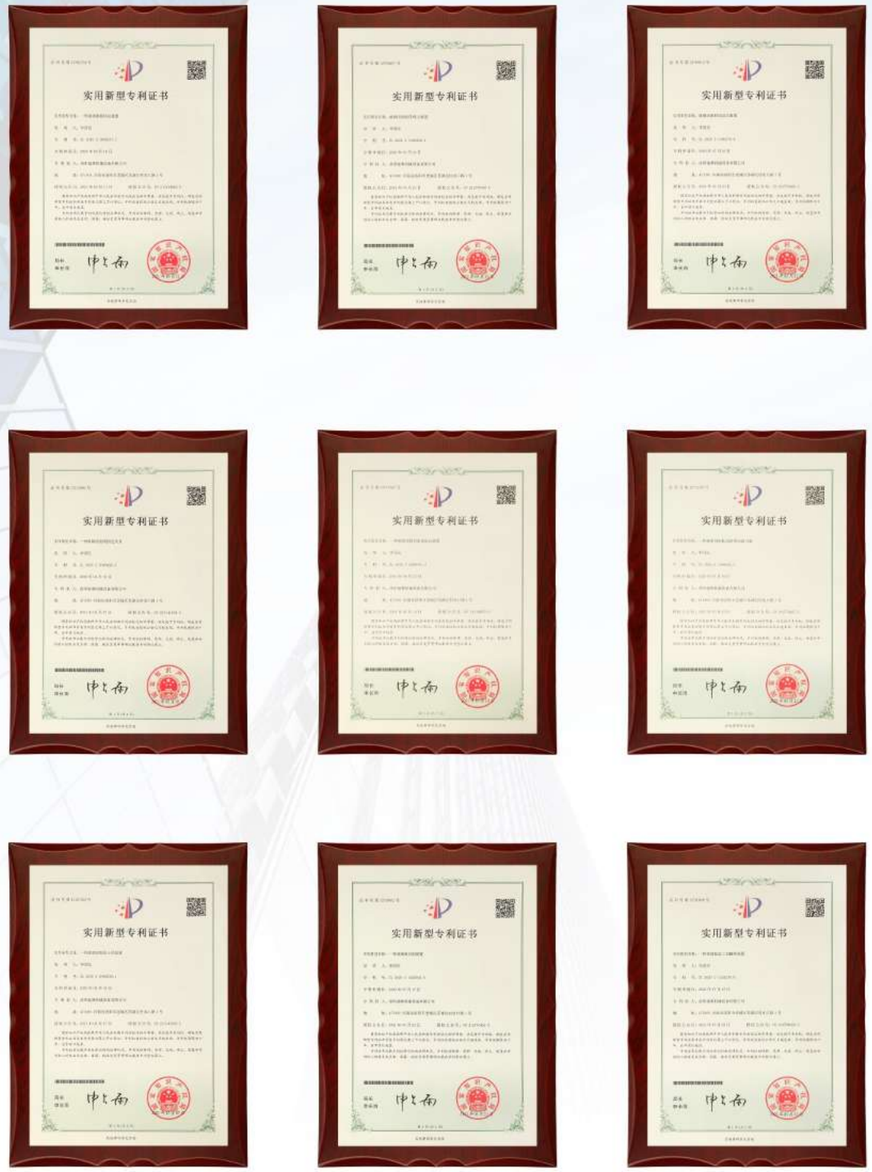

## 部分客户案例Part of the customer cases

DISAI

**河南省**
河南瑞晶钢化玻璃玻璃工程有限公司（郑州）
河南锐亮节能玻璃有限公司（焦作）
河南凯旗玻璃科技有限公司（焦作）
河南旗威玻璃有限公司（焦作）
河南晶鑫钢化玻璃有限公司（新乡）
河南运华玻璃科技有限公司（商丘）
河南业帆钢化玻璃制品有限公司（开封）
濮阳北玻玻璃有限公司（濮阳）
鹤壁天沐钢化玻璃有限公司（鹤壁）
河南双辐玻璃有限公司（新乡）
新乡卓航钢化玻璃有限公司（新乡）
新乡新玻钢化玻璃有限公司（新乡）
许昌民辉玻璃安全玻璃制品有限公司（许昌）
许昌元润玻璃有限公司（许昌）
河南巨赛玻璃有限公司（周口）
驻马店国伟新型材料有限公司（驻马店）
信阳镁玻玻璃有限公司（信阳）
南阳天顺玻璃有限公司（南阳）
南阳宏天玻璃有限公司
河南裕之弘节能玻璃有限公司
三门峡华晶安全玻璃有限公司（三门峡）
洛阳市兰宇玻璃有限公司（洛阳）
河南鹏熙玻璃有限公司（洛阳）
洛阳晶玻节能科技有限公司（洛阳）
河南玻瑞电子科技有限公司（洛阳）
济源三毛玻璃有限公司（济源）
焦作孟州天顺节能玻璃有限公司（焦作）
河南卓领玻璃有限公司（焦作）
……

**广西壮族自治区**
广西益鹏节能玻璃科技有限公司（南宁）
南宁斯亚特玻璃装饰材料有限公司（南宁）
桂林金旺发钢化玻璃有限公司（桂林）
玉林中迪钢化玻璃有限公司（玉林）
广西桂玻节能科技有限公司（柳州）
……

**云南省**
云南玻璃之星节能科技有限公司（昆明）
云南玻利玻璃集团有限公司（昆明）
云南桂隆玻璃有限公司（昆明）
大理耀新玻璃有限公司（大理）
丽江丽达工贸有限公司（丽江）
云南福鑫玻璃装饰有限公司（玉溪）
镇雄佳驰玻璃制品有限公司（昭通）
文山南光钢化玻璃有限公司（文山）
……

**西藏自治区**
西藏吉萨玻璃科技有限公司（拉萨）
西藏金恒迪钢化玻璃有限公司（拉萨）

**甘肃省**
甘肃钏兰钢化玻璃有限公司（兰州）
甘肃华玺晟业玻璃科技有限公司（天水）
定西岷县恒昊玻璃有限公司（定西）
庆阳鼎晶玻璃有限公司（庆阳）
平凉晶波钢化玻璃有限公司（平凉）
临夏鑫阳玻璃有限公司（临夏）
……

**湖南省**
长沙西亚特种玻璃有限公司（长沙）
湖南力加玻璃有限公司（长沙）
湖南领翔玻璃制品有限公司（岳阳）
常德广和钢化玻璃有限公司（常德）
常德临澧兴泰钢化玻璃有限公司（常德）
娄底聚缘玻璃有限公司（娄底）
衡阳海之波商贸有限公司（衡阳）
邵东千喜玻璃有限公司（邵阳）
怀化中龙特种玻璃有限公司（怀化）
永州东安东辉钢化玻璃有限公司（永州）
……

**贵州省**
贵州恩胜晶鑫玻璃制品有限公司（贵阳）
贵州图胜宏锐玻璃科技有限公司（贵阳）
贵州久久玻璃有限公司（黔南州）
……

**陕西省**
西安特奥星玻璃技术有限公司（西安）
陕西一玻玻璃有限公司（西安）
西安殷辉工贸有限公司（西安）
陕西同创节能玻璃科技有限公司（咸阳）
宝鸡万发钢化玻璃有限公司（宝鸡）
陕西雅源福旺建材有限公司（渭南）
陕西凯利金工贸有限公司（铜川）
延安延玻工贸有限公司（延安）
榆林定边昊汀工贸有限公司（榆林）
……

**山西省**
太原并昌实业有限公司（太原）
山西利虎集团（吕梁）
交城全顺玻璃有限公司（吕梁）
山西恒耀玻璃有限公司（运城）
山西忠超建材有限公司（晋中）
山西华晶科技有限公司（忻州）
大同建新玻璃有限公司（大同）
临汾安盛众恒玻璃有限公司（临汾）
山西宏鑫玻璃有限公司（长治）
晋城亨鑫玻璃有限公司（晋城）
……

**安徽省**
合肥旌吉轩钢化玻璃有限公司（合肥）
合肥蓝图玻璃制品有限公司（合肥）
阜阳正大玻璃科技有限公司（阜阳）
亳州玻鑫钢化玻璃有限公司（亳州）
安徽星傲玻璃科技有限公司（亳州）
安徽富耀玻璃有限公司（安庆）
……

**福建省**
福州新亨通玻璃有限公司（福州）
福州乐富钢化玻璃有限公司（福州）
……

**广东省**
佛山南海鸿泰玻璃制品有限公司（佛山）
湛江顺大昌钢化玻璃有限公司（湛江）
汕头华德玻璃有限公司（汕头）
汕头联耀玻璃制品有限公司（汕头）
……

**内蒙古自治区**
内蒙古博美刘清玻璃有限公司（呼和浩特）
内蒙古方元门窗科技有限公司（乌兰察布）
包头豫通中控玻璃有限公司（包头）
包头豫晟玻璃有限公司（包头）
鄂尔多斯万明玻璃制品有限公司（鄂尔多斯）
鄂尔多斯明煦钢化玻璃有限公司（鄂尔多斯）

**湖北省**
湖北星辉玻璃制品有限公司（咸宁）
湖北诚德玻璃有限公司（咸宁）
枝江源中圆建材有限公司（宜昌）
……

**新疆维吾尔自治区**
乌鲁木齐苏鑫钢化玻璃有限公司（乌鲁木齐）
新疆玻腾倍尔钢化玻璃有限公司（乌鲁木齐）
巴州广瑞玻璃制品有限公司（库尔勒）
伊犁晶耀玻璃制品加工有限公司（伊犁）
克拉玛依晶钢玻璃科技有限公司（克拉玛依）
双河市宏盛志远建材有限公司（博尔塔拉州）
喀什泽普兄弟玻璃有限公司（喀什）
……

**江西省**
江西江耀玻璃制品有限公司（南昌）
江西正源玻璃制品有限公司（上饶）
鹰潭辉波建材有限公司（鹰潭）
江西众恒钢化玻璃有限公司（赣州）
萍乡明大玻璃有限公司（萍乡）
景德镇中玻玻璃科技有限公司（景德镇）
……

**浙江省**
绍兴邦行玻璃有限公司（绍兴）
宁波星迪特种玻璃有限公司（宁波）
台州市枫南钢化玻璃有限公司（台州）
德清建润玻璃有限公司（湖州）
衢州富楼国玻璃有限公司（衢州）
……

**江苏省**
无锡市万佳玻璃制品有限公司（无锡）
江苏鸿创玻璃科技有限公司（宿迁）
……

**山东省**
青岛鑫好来玻璃有限公司（青岛）
青岛晶玉玻璃工贸有限公司（青岛）
青岛信诺恒达玻璃有限公司（青岛）
烟台市玉晶玻璃科技有限公司（烟台）
山东天禄玻璃有限公司（东营）
山东华玻玻璃工程有限公司（临沂）
济宁兴华玻璃工贸有限公司（济宁）
菏泽众耀玻璃有限公司（菏泽）
聊城鲁晶钢化玻璃有限公司（聊城）
……

**重庆市**
重庆鑫金川门业有限公司
重庆龙梁玻璃有限公司
重庆东飞玻璃制品有限公司
……

**四川省**
成都龙泰印精工玻璃有限公司（成都）
成都传奇玻璃制造有限公司（成都）
广汉炜鑫玻璃有限公司（德阳）
德阳铭达安全特种玻璃有限公司（德阳）
四川世海锦诚玻璃有限公司（遂宁）
四川欧赛斯玻璃加工有限公司（绵阳）
四川奥图玻璃有限公司（南充）
四川玖源门业有限公司（广安）
……

**青海省**
青海青玻实业有限公司（西宁）
青海耀玻工贸有限公司（西宁）
青海平发玻璃制品有限公司（西宁）
……

**宁夏回族自治区**
宁夏延宁钢化玻璃有限公司（银川）
宁夏红泰通达玻璃有限公司（银川）
宁夏瑞鸿鑫玻璃有限公司（银川）
宁夏豫杞玻璃加工有限公司（银川）
……

**河北省**
保定弘毅玻璃制品有限公司（保定）
沧州鑫义达玻璃制品有限公司（沧州）
……

**吉林省**
吉林鑫美顺钢化玻璃有限公司（长春）
……

**天津市**
天津亿丰玻璃科技有限公司
……







# 20年玻璃加工机械专业制造

20 years of professional manufactures on glass processing machinery

Bohle　DELTA TAU　Schneider Electric
igus® plastics for longer life®　OMRON　Panasonic
SIEMENS　YASKAWA

**精选最新配件——所有核心部件均来自国际知名供应商**
Well-chosen up-to-date parts- all the core components are from internationally renowned supplier.

**严格的质量控制——整个生产过程都在我们内部的监督下**
Strict quality control-The whole production process is under our supervision in house.

**优质服务——1年质保，终身维护**
Excellent service-1 year warranty, lifelong Maintenance.

## 我们的荣誉

Our honors

